

VS manufaktur
licht + objekt



Timeless craftsmanship

Our mission is to manufacture lamps of lasting value,
in function and in form distinguished
by superior craftsmanship and timeless design.

VS manufaktur
licht + objekt

Collection 2019

Recommended retail price without VAT, valid with effect from February 1st 2019.

With immediate effect, only the models specified in this list are available.

The technical data in this price list shall apply exclusively.

Alphabetical index

page	page
ALIA35	LOT12
BEO38	MESA 1810
BLOC33	MESA 2411
CERVANTES.....24	MYOS14
ELAS31	OKON13
ELAS S.....31	OLA 36.....45
ERA 3337	ONE 58.....6
ERA 4037	ONE 80.....7
EREA 80.....40	ONOS 40 ...50 – 51
GEA34	ONOS 55 ...48 – 49
GELA 40 ...42 – 43	ORA 2030
GELA 55 ...42 – 43	ORA 2530
GELA 80 ...42 – 43	OVA8 – 9
GO 30.....18	OY 55.....58
INAS.....21	OYO59
LESAN M25	PEN 100.....54
LESAN S.....25	PEN 121.....55
LIN19	PEN 142....56 – 57

Collection

page	page
PIN16 – 17	Chandeliers:6 – 11
PIN d16 – 17	Floorlamps:12 – 14
PIN T28	Arc floor lamps:15
PIN W dim32	Floor reading lamps:16 – 25
POSA 36 ...46 – 47	Table lamps:.....26 – 31
SELA 5544	Wall sconces:.....32 – 39
SOLA 8041	Ceiling lamps:.....40 – 45
STE20	Adjustable pendant lamps: ...46 – 51
TOA27	Pendant lamps:54 – 57
TOLED26	Spots:.....58 – 59
UNA15	
WED.....36	
WIN39	
YON22 – 23	
YON G22 – 23	
YON T29	

Prices for non-standard finishes

In addition to the metal finishes quoted in this price list, special finishes are available for most models.


Surcharges are calculated from the basic price for brass (- Ms) or nickel (-Ni): *

Mp	Solid brass polished, unlacquered	+ 10%
Ni-lack	Solid brass, nickel plated, lacquered	+ 10%
Cu	Solid brass, copper plated	+ 10%
Br	Solid brass, bronzed, lacquered	+ 20%
Bd	Solid brass, dark-bronzed, lacquered	+ 30%

delivery times on request

* Prices can vary depending on model and technical feasibility.

Finishes

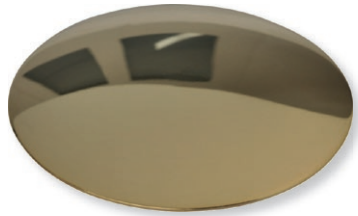

Ms
Solid brass polished, lacquered




Ni
Solid brass, nickel plated



Mt
Solid brass matt brushed, lacquered




Nm
Solid brass nickel plated, matt brushed

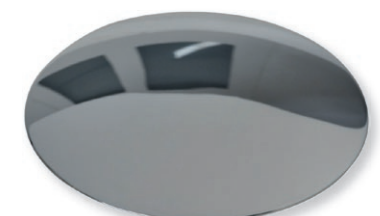

Cr
Solid brass, chrome-plated

Non-standard finishes

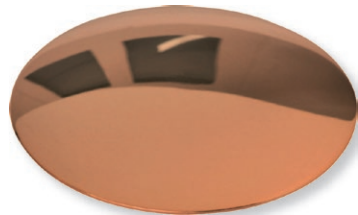

Cu
Solid brass, copper plated



Br
Solid brass, bronzed, lacquered



Bd
Solid brass, dark-bronzed, lacquered

Note:

The special surfaces „Mp – Solid brass polished, unlacquered“ and „Ni-lack – Solid brass, nickel plated, lacquered“ visually look the same, such as „Ms – Solid brass polished, lacquered“ and „Ni – Solid brass, nickel plated“.



ONE 58

Available from May 2019!

LED chandelier

height: adjustable 0.5 to 2 m (16.69" to 78.74") (standard)*

Ø ring: 58 cm (22.8")

Ø canopy: 25 cm (9.8")

illuminant: LED with glare protection
light upwards and downwards
approx. 3.020 Lumen

colour temperature: warm white 2700 K

Farbwiedergabe: > 90 Ra

		€
ONE 58 – Ms	Solid brass polished, lacquered	2948.–
ONE 58 – Ni	Solid brass, nickel plated	2948.–
ONE 58 – Mt	Solid brass matt brushed, lacquered	3243.–
ONE 58 – Nm	Solid brass nickel plated, matt brushed	3243.–
ONE 58 – Cr	Solid brass, chrome-plated	3243.–


Energy class: A++ to A

* Other heights: available on request

110 Volt/USA: **not dimmable**

4" junction box: covered

Additional USA 110 V conversion kit: 84.–

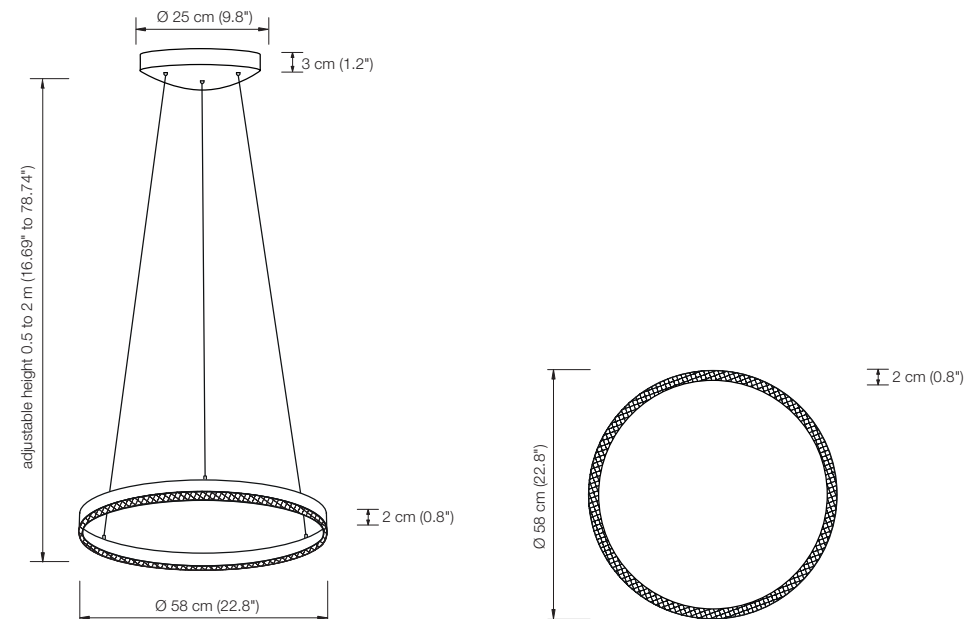

ONE 80

LED chandelier

height: adjustable 0.5 to 2 m (16.69" to 78.74") (standard)**

Ø ring: 80 cm (31.5")

Ø canopy: 25 cm (9.8")

illuminant: LED with glare protection
light upwards and downwards
approx. 5.000 Lumen

colour temperature: warm white 2700 K

colour rendering: > 90 Ra

		€
ONE 80 – Ms	Solid brass polished, lacquered	3800.–
ONE 80 – Ni	Solid brass, nickel plated	3800.–
ONE 80 – Mt	Solid brass matt brushed, lacquered	4180.–
ONE 80 – Nm	Solid brass nickel plated, matt brushed	4180.–
ONE 80 – Cr	Solid brass, chrome-plated	4180.–


Energy class: A++ to A

* Other heights: available on request

110 Volt/USA: **not dimmable**

4" junction box: covered

Additional USA 110 V conversion kit: 84.–

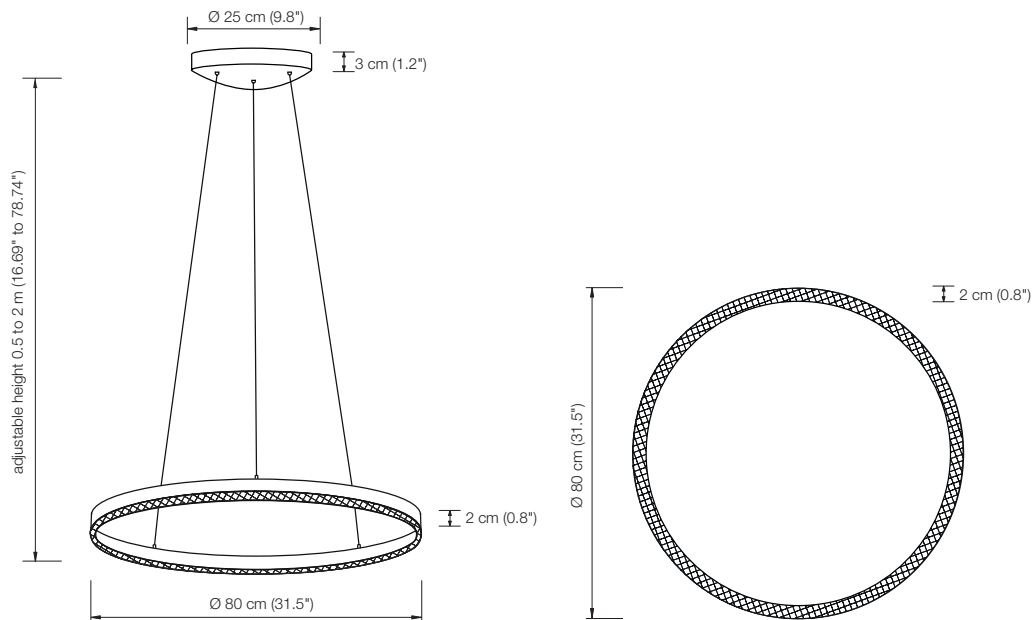



OVA

LED chandelier

height: adjustable 1.5 to 2 m (59.06" to 78.74") (standard)*

oval shade: 125 cm long, 47 wide, 4 cm high
(49.2" long, 18.5" wide, 1.6" high)

canopy: 47 cm long, 14 cm wide, 5 cm high
(18.5" long, 5.5" wide, 2" high)

illuminant: LED with glare protection
light upwards and downwards
approx. 3.000 Lumen

colour rendering: > 90 Ra

colour temperature: warm white 2700 K

	€	
OVA – Ms	Solid brass polished, lacquered	4900.–
OVA – Ni	Solid brass, nickel plated	4900.–
OVA – Mt	Solid brass matt brushed, lacquered	5390.–
OVA – Nm	Solid brass nickel plated, matt brushed	5390.–
OVA – Cr	Solid brass, chrome-plated	5390.–



Energy class: A++ to A

* Other heights possible, each with a range of 50 cm (19.7").

110 Volt/USA: not dimmable

4" junction box: covered

Additional USA 110 V conversion kit: 84.–

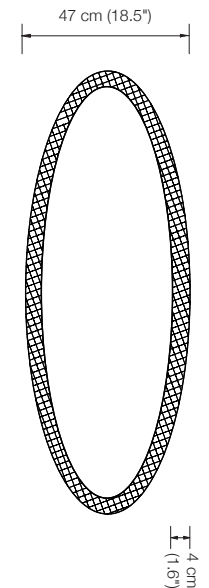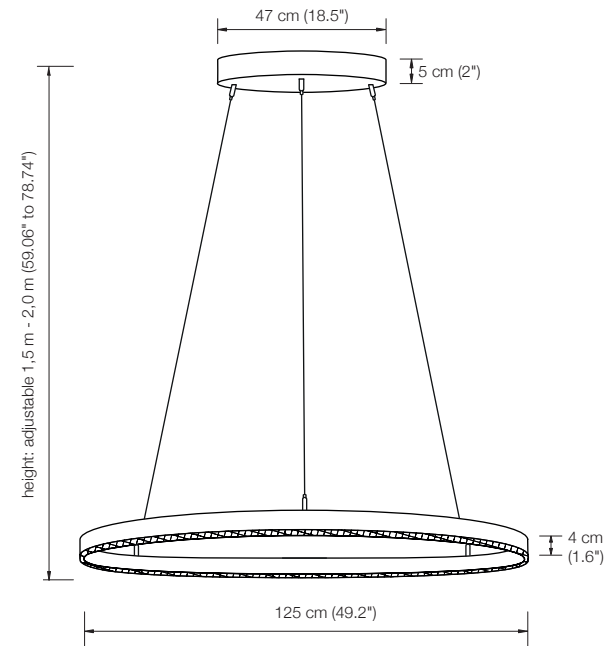



MESA 18

chandelier

18 removable metal arms

total height: min. 85 cm (33.5") - max. 305 cm (120.1") *

Ø: 88 cm (34.6")

lampholder: 18 x G 4, max. 18 x 20 W / 12 V

bulb: 20 x OSRAM HALOSTAR 20 W incl.

dimmer: brightness control is possible **

		€
MESA 18 – Ms	Solid brass polished, lacquered	3623.–
MESA 18 – Ni	Solid brass, nickel plated	3623.–
MESA 18 – Mt	Solid brass matt brushed, lacquered	3985.–
MESA 18 – Nm	Solid brass nickel plated, matt brushed	3985.–
MESA 18 – Cr	Solid brass, chrome-plated	3985.–

4" junction box: covered

Additional USA 110 V conversion kit: 166.–

* telescopic adjustment:

total height 85 – 125 cm (33.5" – 49.2") (standard)



total height 115 – 185 cm (45.3" – 72.8")

total height 175 – 305 cm (68.9" – 120.1")

Other options available on request.

Please indicate with order.

** These lamps are equipped with 2 electronic transformers of 210 VA capacity each.

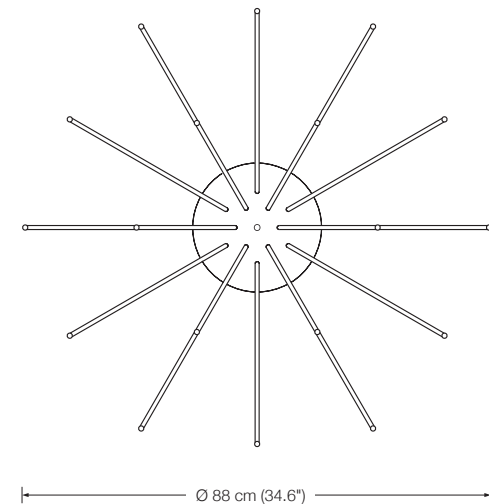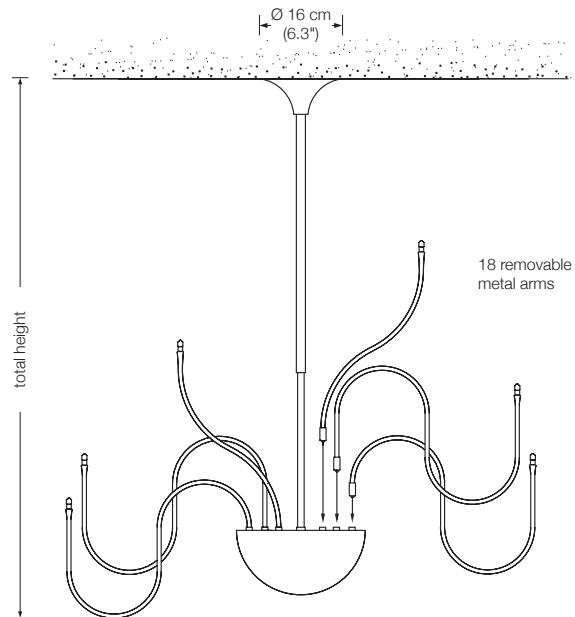

MESA 24

chandelier

24 removable metal arms

total height: min. 95 (37.4") - max. 315 cm (53.1") *

Ø: 140 cm (55.1")

lampholder: 24 x G 4, max. 24 x 20 W / 12 V

bulb: 28 x OSRAM HALOSTAR 20 W incl.

dimmer: brightness control is possible **

		€
MESA 24 – Ms	Solid brass polished, lacquered	4379.–
MESA 24 – Ni	Solid brass, nickel plated	4379.–
MESA 24 – Mt	Solid brass matt brushed, lacquered	4816.–
MESA 24 – Nm	Solid brass nickel plated, matt brushed	4816.–
MESA 24 – Cr	Solid brass, chrome-plated	4816.–

4" junction box: covered

Additional USA 110 V conversion kit: 210.–

* telescopic adjustment:

total height 95 – 135 cm (37.4" – 53.1") (standard)


total height 125 – 195 cm (49.2" – 76.8")

total height 185 – 315 cm (72.8" – 124")

Other options available on request.

Please indicate with order.

** These lamps are equipped with 3 electronic transformers of 210 VA capacity each.

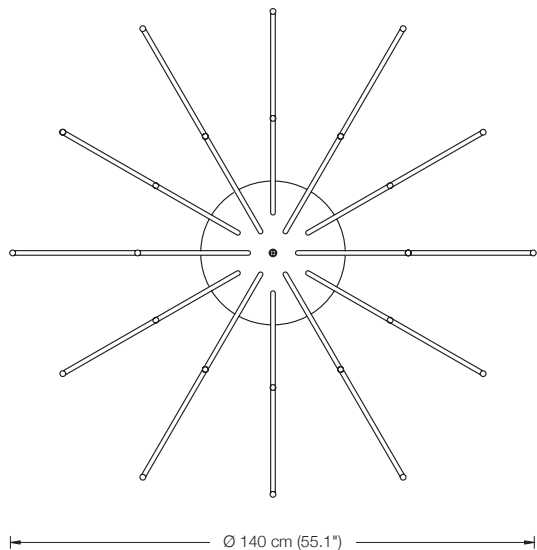



LOT


floor lamp

height: 180 cm (70.9")
shade: TEFLON white Ø 7 cm (2.8")
lampholder: GY 6.35, max. 50 W / 12 V
bulb: OSRAM HALOSTAR ECO
35 W $\hat{=}$ 50 W incl.
dimmer: sensor (touch dimmer) *

		€
LOT – Ms	Solid brass polished, lacquered	1017.–
LOT – Ni	Solid brass, nickel plated	1017.–
LOT – Mt	Solid brass matt brushed, lacquered	1119.–
LOT – Nm	Solid brass nickel plated, matt brushed	1119.–
LOT – Cr	Solid brass, chrome-plated	1119.–

* also available: dimmer on cord
Please indicate with order

This model is not available for 110 Volt/USA.

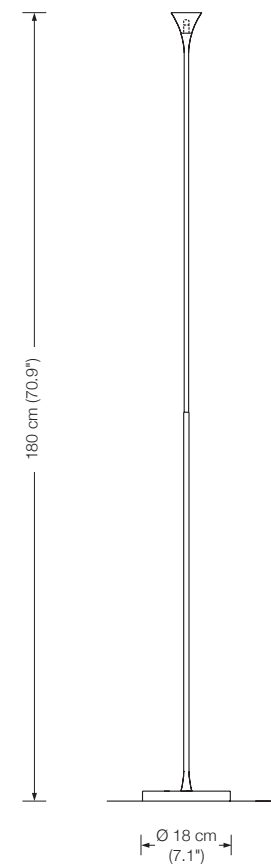

OKON

floor lamp

height: 183 cm (72")

shade: metal Ø 40 cm (15.7") bottom glass diffuser

lampholder: R7s, max. 500 W - for 110 V: max. 250 W


bulb: OSRAM HALOLINE ECO 230 W

dimmer: built in

		€
OKON – Ms	Solid brass polished, lacquered	2513.–
OKON – Ni	Solid brass, nickel plated	2513.–
OKON – Mt	Solid brass matt brushed, lacquered	2764.–
OKON – Nm	Solid brass nickel plated, matt brushed	2764.–
OKON – Cr	Solid brass, chrome-plated	2764.–

Additional USA 110 V conversion kit: 18.–

110 V bulbs are not included

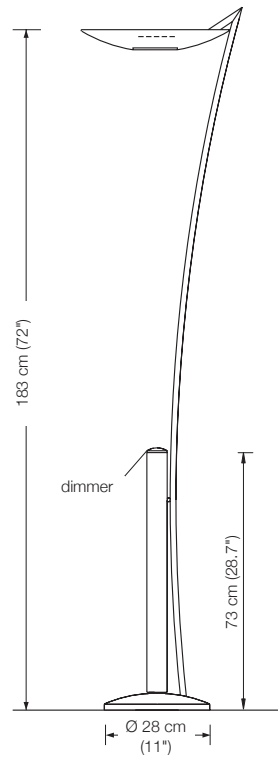



MYOS


floor lamp / reading lamp

height:	182 cm (71.7")
width reading lamp:	approx. 50 cm (19.7")
shade floor lamp:	glass white-opal, Ø 26 cm (10.2")
shade reading lamp:	metal Ø 12 cm (4.7"), adjustable
lampholder floor lamp:	E 27, max. 250 W - for 110 V: max.150 W
bulb floor lamp:	OSRAM HALOLUX CERAM ECO 150 W
lampholder reading lamp:	GY 6.35, max. 50 W / 12 V
bulb reading lamp:	OSRAM HALOSTAR ECO 35 W $\hat{=}$ 50 W incl.
dimmer:	2 x built in

		€
MYOS – Ms	Solid brass polished, lacquered	2134.–
MYOS – Ni	Solid brass, nickel plated	2134.–
MYOS – Mt	Solid brass matt brushed, lacquered	2347.–
MYOS – Nm	Solid brass nickel plated, matt brushed	2347.–
MYOS – Cr	Solid brass, chrome-plated	2347.–

glass tabletop Ø 36 cm, height 50 cm, clear glass 10 mm 300.–

Additional USA 110 V conversion kit: 64.–
110 V bulbs are not included

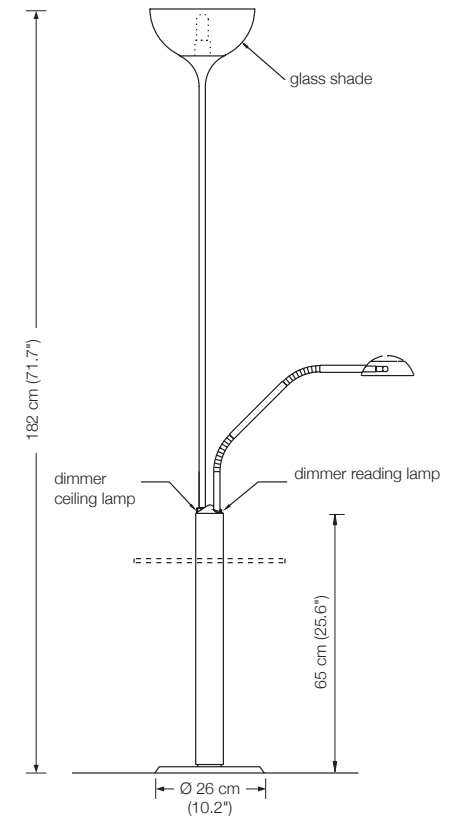


UNA

arc floor lamp
mounting between floor and ceiling
variable up to 3.20 m (126") room height
arc height adjustable

shade: metal, Ø 17 cm (6.7"), rotatable
lampholder: B 15d, max. 250 W - for 110 V: max. 150 W
bulb: OSRAM HALOLUX CERAM ECO 150 W
dimmer: built in

		€
UNA – Ms	Solid brass polished, lacquered	2276.–
UNA – Ni	Solid brass, nickel plated	2276.–
UNA – Mt	Solid brass matt brushed, lacquered	2504.–
UNA – Nm	Solid brass nickel plated, matt brushed	2504.–
UNA – Cr	Solid brass, chrome-plated	2504.–

Additional USA 110 V conversion kit: 18.–

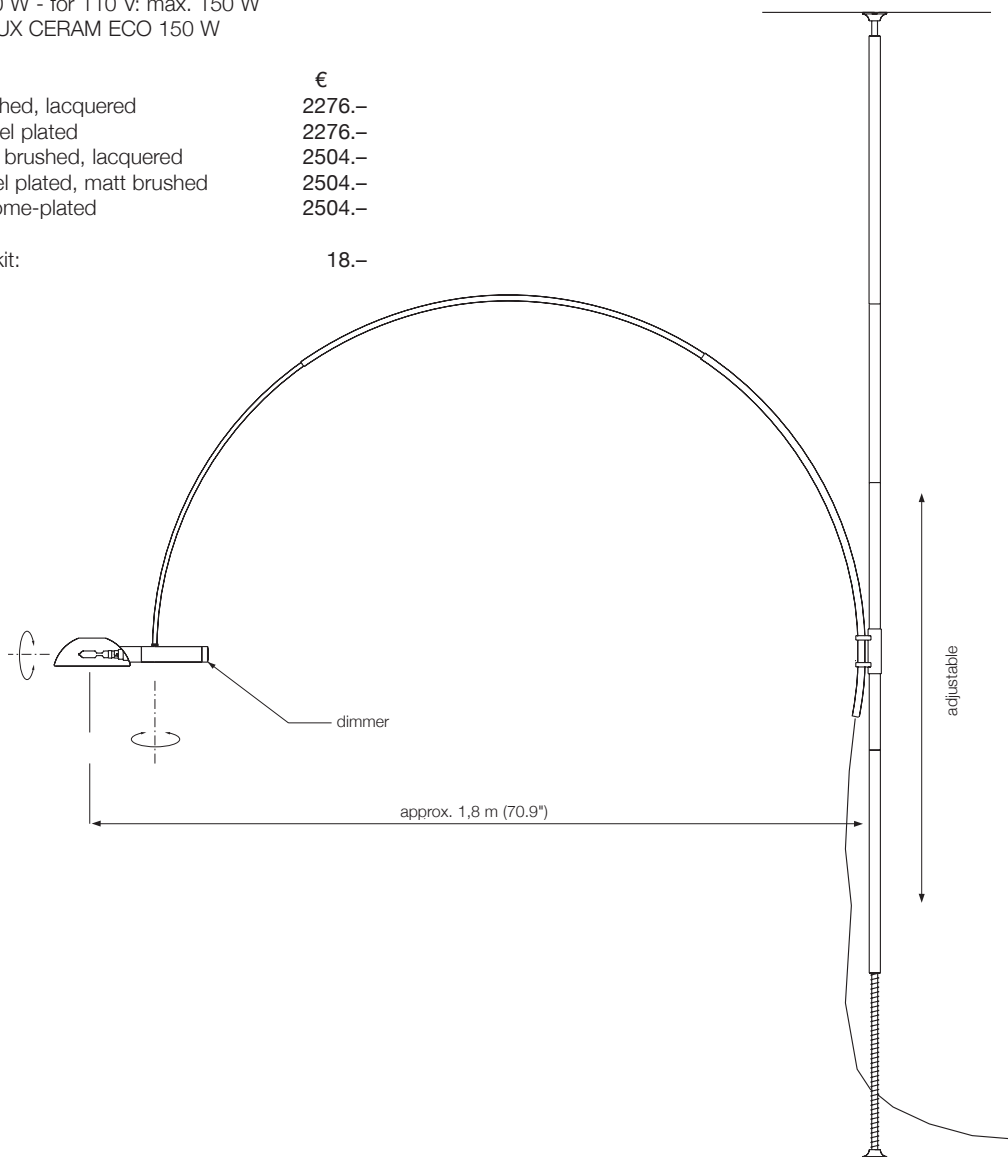



PIN

floor reading lamp

height: 100 - 135 cm (39.4 - 53.2") adjustable

width: approx. 52 cm (20.5")

bulb: LED-Line 150 incl.
exchangeable

approx. 600 Lumen

color temperature: warmwhite 2700 Kelvin

€

PIN – Ms Solid brass polished, lacquered 861.–

PIN – Ni Solid brass, nickel plated 861.–

PIN – Mt Solid brass matt brushed, lacquered 945.–

PIN – Nm Solid brass nickel plated, matt brushed 945.–

PIN – Cr Solid brass, chrome-plated 945.–

Additional USA 110 V conversion kit: 31.–

Energy class: A++ to A

PIN d

floor reading lamp

height: 105 - 140 cm (41.3 - 55.1") adjustable

width: approx. 52 cm (20.5")

bulb: LED-Line 150 incl.
exchangeable
approx. 840 Lumen

color temperature: warmwhite 2700 Kelvin

dimmer: built in



€

PIN d – Ms Solid brass polished, lacquered 987.–

PIN d – Ni Solid brass, nickel plated 987.–


PIN d – Mt Solid brass matt brushed, lacquered 1082.–

PIN d – Nm Solid brass nickel plated, matt brushed 1082.–

PIN d – Cr Solid brass, chrome-plated 1082.–

Additional USA 110 V conversion kit: 44.–

Energy class: A++ to A

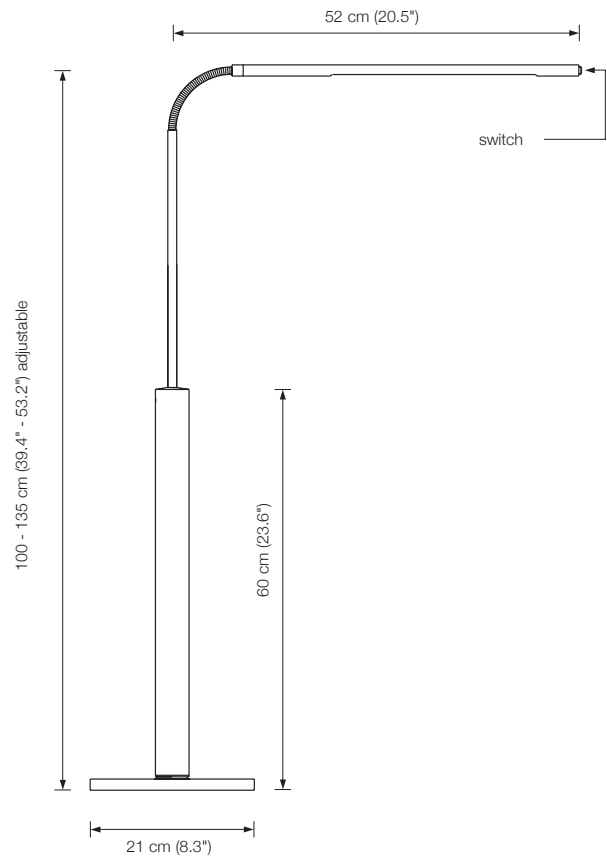



GO 30

floor reading lamp

height: 100 - 170 cm (39.37 - 66.9") adjustable

shade: TEFLON white, Ø 10 cm (3.9")

lampholder: GY 6.35

bulb: OSRAM HALOSTAR ECO

50 W $\hat{=}$ 75 W incl.


dimmer: sensor (touch dimmer)*

		€
GO 30 – Ms	Solid brass polished, lacquered	882.–
GO 30 – Ni	Solid brass, nickel plated	882.–
GO 30 – Mt	Solid brass matt brushed, lacquered	966.–
GO 30 – Nm	Solid brass nickel plated, matt brushed	966.–
GO 30 – Cr	Solid brass, chrome-plated	966.–

* also available: dimmer on cord

Please indicate with order.

This model is not available for 110 Volt/USA.

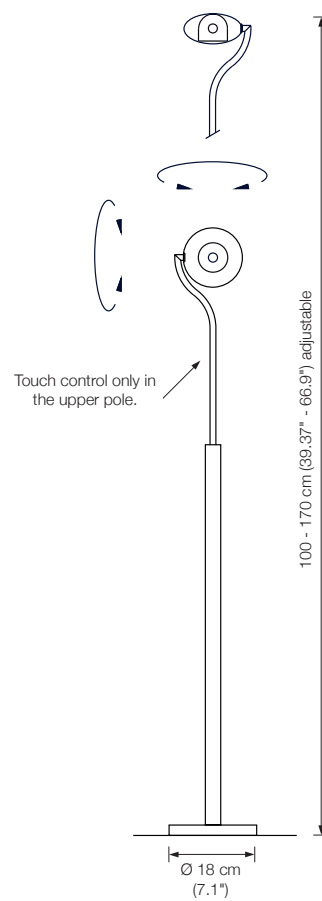

LIN

floor reading lamp

flexible and specially reinforced metal arm

height: approx. 140 cm (55.1")

shade: TEFLON white, Ø 7 cm (2.8")

lampholder: GY 6.35, max. 50 W 12 V

bulb: OSRAM HALOSTAR ECO

35 W $\hat{=}$ 50 W incl.


dimmer: sensor (touch dimmer) *

		€
LIN – Ms	Solid brass polished, lacquered	877.–
LIN – Ni	Solid brass, nickel plated	877.–
LIN – Mt	Solid brass matt brushed, lacquered	965.–
LIN – Nm	Solid brass nickel plated, matt brushed	965.–
LIN – Cr	Solid brass, chrome-plated	965.–

This model is not available for 110 Volt/USA.

* also available: dimmer on cord

Please indicate with order.

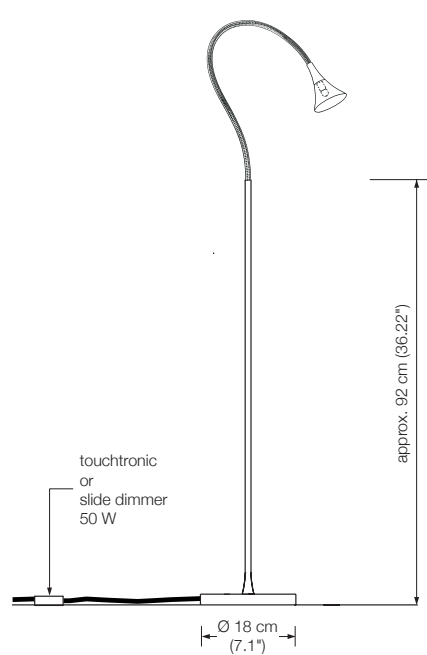



STE


floor reading lamp

height: adjustable
 shade: silk 101, natural white *
 lampholder: E 27, max. 150 W

		€
STE – Ms	Solid brass polished, lacquered	1034.–
STE – Ni	Solid brass, nickel plated	1034.–
STE – Mt	Solid brass matt brushed, lacquered	1117.–
STE – Nm	Solid brass nickel plated, matt brushed	1117.–
STE – Cr	Solid brass, chrome-plated	1117.–

Additional USA 110 V conversion kit: 24.–

* fabric required: 120 x 60 cm (47.2" x 23.6")

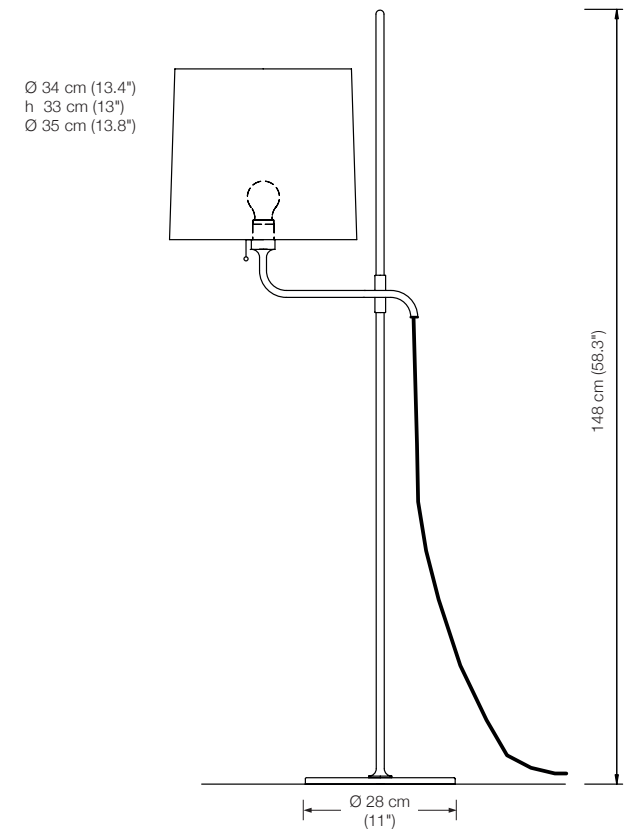

INAS

floor reading lamp


height: 132 - 170 cm (52" - 66.9") adjustable
shade: silk, conical or straight*
lampholder: E 27, max. 250 W
dimmer: on cord

		€
INAS – Ms	Solid brass polished, lacquered	1044.–
INAS – Ni	Solid brass, nickel plated	1044.–
INAS – Mt	Solid brass matt brushed, lacquered	1128.–
INAS – Nm	Solid brass nickel plated, matt brushed	1128.–
INAS – Cr	Solid brass, chrome-plated	1128.–

Additional USA 110 V conversion kit: 24.–
110 V bulbs not incl.

* Please indicate with order.

fabric required: 120 x 60 cm (47.3" x 23.6")

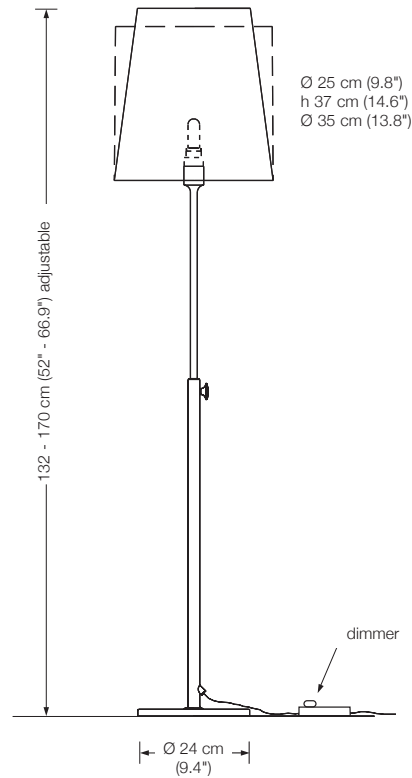


YON

floor reading lamp

height: adjustable
 shade: metal Ø 12 cm (4.7"), rotatable
 lampholder: GY 6.35, max. 50 W / 12 V
 bulb: OSRAM HALOSTAR ECO 35 W $\hat{=}$ 50 W incl.
 dimmer: built in

YON – Ms	Solid brass polished, lacquered	€ 1197.–
YON – Ni	Solid brass, nickel plated	€ 1197.–
YON – Mt	Solid brass matt brushed, lacquered	€ 1317.–
YON – Nm	Solid brass nickel plated, matt brushed	€ 1317.–
YON – Cr	Solid brass, chrome-plated	€ 1317.–

Additional USA 110 V conversion kit: € 64.–

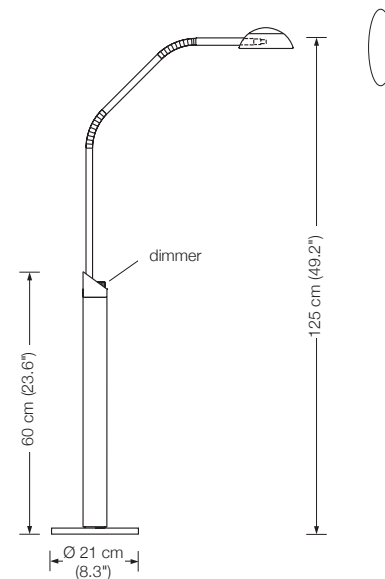


YON G

floor reading lamp

with glass tabletop Ø 30 cm (11.8"), clear glass
 height: adjustable
 shade: metal Ø 12 cm (4.7"), rotatable
 lampholder: GY 6.35, max. 50 W / 12 V
 bulb: OSRAM HALOSTAR ECO 35 W $\hat{=}$ 50 W incl.
 dimmer: built in

YON G – Ms	Solid brass polished, lacquered	€ 1323.–
YON G – Ni	Solid brass, nickel plated	€ 1323.–
YON G – Mt	Solid brass matt brushed, lacquered	€ 1455.–
YON G – Nm	Solid brass nickel plated, matt brushed	€ 1455.–
YON G – Cr	Solid brass, chrome-plated	€ 1455.–

Additional USA 110 V conversion kit: € 64.–

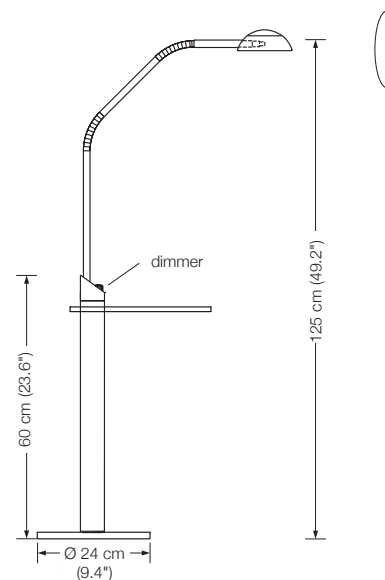





CERVANTES

floor reading lamp

height: 80 - 120 cm (31.5" - 47.2") adjustable

shade: metal, rotatable


lampholder: E 27, max. 100 W

		€
CERVANTES – Ms	Solid brass polished, lacquered	992.–
CERVANTES – Ni	Solid brass, nickel plated	992.–
CERVANTES – Mt	Solid brass matt brushed, lacquered	1092.–
CERVANTES – Nm	Solid brass nickel plated, matt brushed	1092.–
CERVANTES – Cr	Solid brass, chrome-plated	1092.–

Additional USA 110 V conversion kit:

24.–

110 V bulbs not incl.

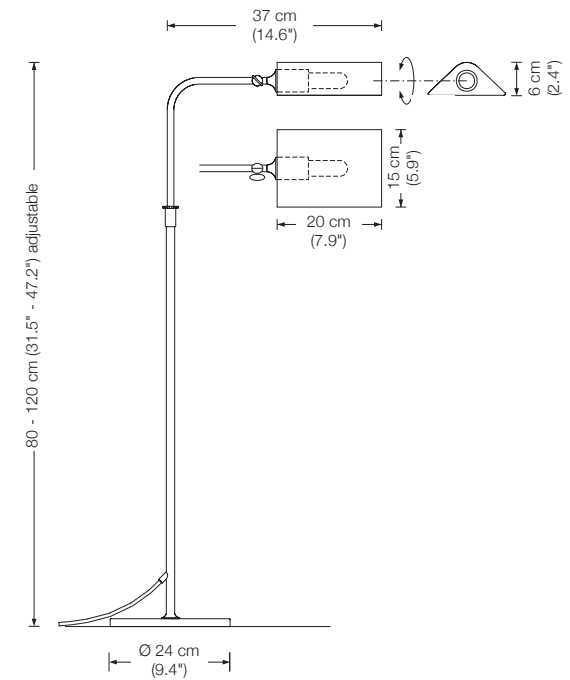



LESAN M

floor reading lamp

height: 90 - 135 cm (35.4" - 53.1") adjustable

shade: metal Ø 28 cm (11")

lampholder: E 27, max. 100 W

		€
LESAN – Ms	Solid brass polished, lacquered	1204.–
LESAN – Ni	Solid brass, nickel plated	1204.–
LESAN – Mt	Solid brass matt brushed, lacquered	1325.–
LESAN – Nm	Solid brass nickel plated, matt brushed	1325.–
LESAN – Cr	Solid brass, chrome-plated	1325.–

Additional USA 110 V conversion kit: 24.–
110 V bulbs not incl.

LESAN S

floor reading lamp

height: 90 - 135 cm (35.4" - 53.1") adjustable


shade: silk* Ø 28 cm (11")

lampholder: E 27, max. 100 W

		€
LESAN S – Ms	Solid brass polished, lacquered	1047.–
LESAN S – Ni	Solid brass, nickel plated	1047.–
LESAN S – Mt	Solid brass matt brushed, lacquered	1120.–
LESAN S – Nm	Solid brass nickel plated, matt brushed	1120.–
LESAN S – Cr	Solid brass, chrome-plated	1120.–

Additional USA 110 V conversion kit: 24.–
110 V bulbs not incl.

* fabric required: 50 x 80 cm (19.7" x 31.5")

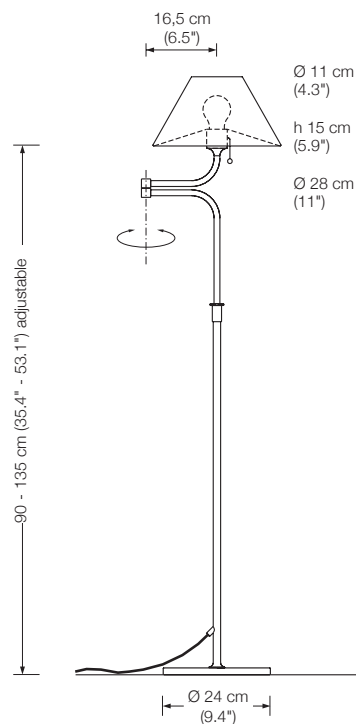



TOLED


desk lamp

height: 45 cm (17.7")
 width: 70 cm (27.6")
 shade: rotatable
 bulb: LED-Line 150 incl.
 exchangeable
 approx. 600 Lumen
 color temperature: warmwhite 2700 Kelvin

		€
TOLED – Ms	Solid brass polished, lacquered	1340.–
TOLED – Ni	Solid brass, nickel plated	1340.–
TOLED – Mt	Solid brass matt brushed, lacquered	1480.–
TOLED – Nm	Solid brass nickel plated, matt brushed	1480.–
TOLED – Cr	Solid brass, chrome-plated	1480.–

Additional USA 110 V conversion kit: 31.–

EU Energy class: A++ to A

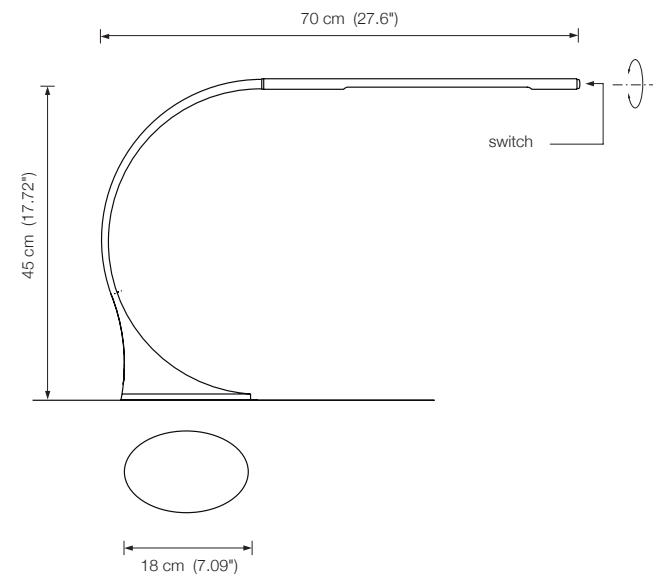

TOA

table lamp

flexible and specially reinforced metal arm

height: up to max. 50 cm (19.7")

shade: TEFLON white, Ø 7 cm (2.8")


lampholder: GY 6.35, max. 20 W / 12 V

bulb: OSRAM HALOSTAR IRC 20 W incl.

dimmer: built in

		€
TOA – Ms	Solid brass polished, lacquered	814.–
TOA – Ni	Solid brass, nickel plated	814.–
TOA – Mt	Solid brass matt brushed, lacquered	896.–
TOA – Nm	Solid brass nickel plated, matt brushed	896.–
TOA – Cr	Solid brass, chrome-plated	896.–

Additional USA 110 V conversion kit: 140.–

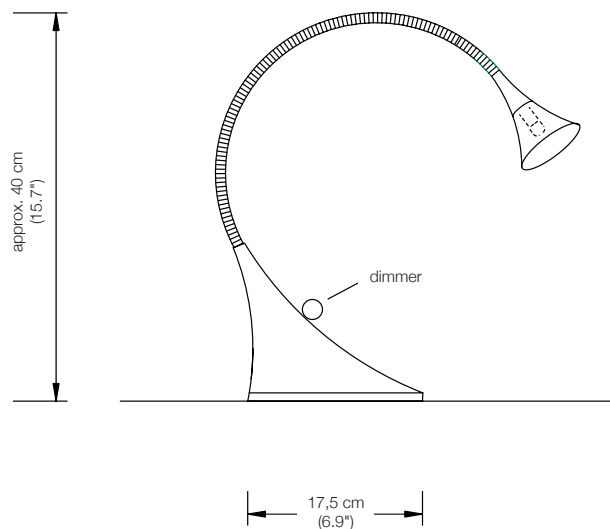



PIN T


desk lamp

height: 45 cm (17.7")
 width: 70 cm (27.6")
 shade: rotatable
 bulb: LED-Line 150 incl.
 exchangeable
 approx. 600 Lumen
 color temperature: warmwhite 2700 Kelvin

		€
PIN T – Ms	Solid brass polished, lacquered	882.–
PIN T – Ni	Solid brass, nickel plated	882.–
PIN T – Mt	Solid brass matt brushed, lacquered	966.–
PIN T – Nm	Solid brass nickel plated, matt brushed	966.–
PIN T – Cr	Solid brass, chrome-plated	966.–

Additional USA 110 V conversion kit: 31.–

EU Energy class: A++ to A

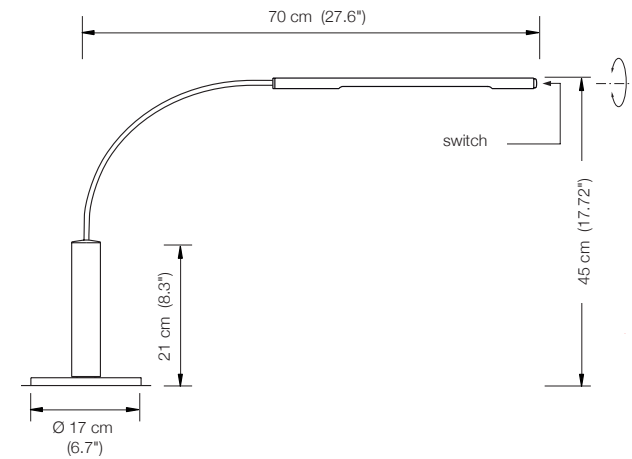

YON T

table lamp

shade: metal Ø 12 cm (4.7"), adjustable


lampholder: GY 6.35, max. 50 W / 12 V

bulb: OSRAM HALOSTAR ECO 35 W $\hat{=}$ 50 W incl.

dimmer: built in

		€
YON T - Ms	Solid brass polished, lacquered	1232.-
YON T - Ni	Solid brass, nickel plated	1232.-
YON T - Mt	Solid brass matt brushed, lacquered	1355.-
YON T - Nm	Solid brass nickel plated, matt brushed	1355.-
YON T - Cr	Solid brass, chrome-plated	1355.-

Additional USA 110 V conversion kit: 64.-

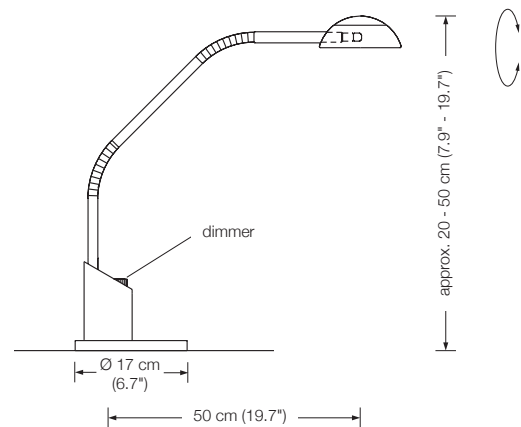



ORA 20

table lamp
 metal ball Ø 20 cm (7.9")
 height: 59 cm (23.2")
 shade: silk*
 lampholder: E 27, max. 150 W
 dimmer: on cord

		€
ORA 20 – Ms	Solid brass polished, lacquered	928.–
ORA 20 – Ni	Solid brass, nickel plated	928.–
ORA 20 – Mt	Solid brass matt brushed, lacquered	1003.–
ORA 20 – Nm	Solid brass nickel plated, matt brushed	1003.–
ORA 20 – Cr	Solid brass, chrome-plated	1003.–

Additional USA 110 V conversion kit: 12.–
 110 V bulbs not included

* fabric required: 120 x 60 cm (47.2" x 23.6")



ORA 25

table lamp
 metal ball Ø 25 cm (9.8")
 height: 71 cm (28")
 shade: silk*
 lampholder: E 27, max. 150 W
 dimmer: on cord

		€
ORA 25 – Ms	Solid brass polished, lacquered	1037.–
ORA 25 – Ni	Solid brass, nickel plated	1037.–
ORA 25 – Mt	Solid brass matt brushed, lacquered	1120.–
ORA 25 – Nm	Solid brass nickel plated, matt brushed	1120.–
ORA 25 – Cr	Solid brass, chrome-plated	1120.–

Additional USA 110 V conversion kit: 12.–
 110 V bulbs not included

* fabric required: 140 x 70 cm (55.1" x 27.6")

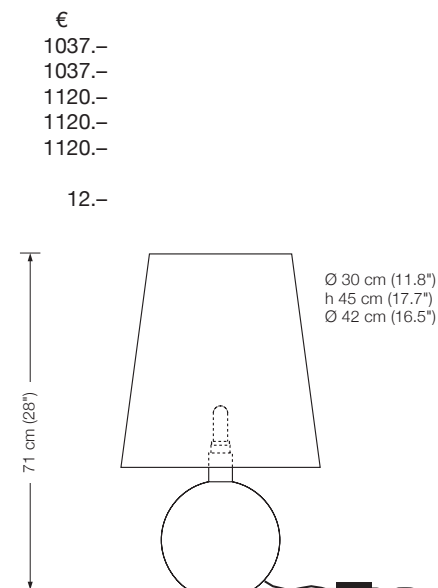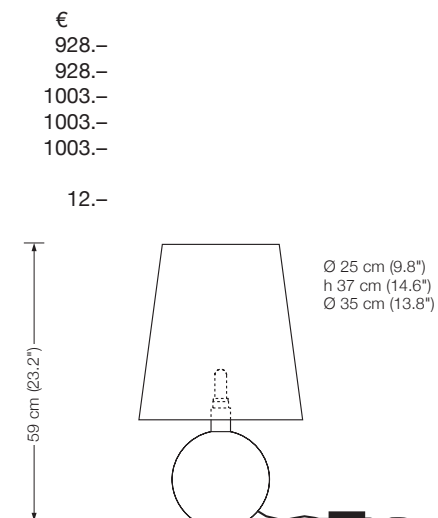

ELAS

table lamp

height: 50 - 70 cm (19.7" - 27.6") adjustable
 shade: metal Ø 28 cm (11")
 lampholder: E 27, max. 100 W

		€
ELAS – Ms	Solid brass polished, lacquered	933.–
ELAS – Ni	Solid brass, nickel plated	933.–
ELAS – Mt	Solid brass matt brushed, lacquered	1027.–
ELAS – Nm	Solid brass nickel plated, matt brushed	1027.–
ELAS – Cr	Solid brass, chrome-plated	1027.–

Additional USA 110 V conversion kit 12.–
 110 V bulbs not included

ELAS S


table lamp

height: 50 - 70 cm (19.7" - 27.6") adjustable
 shade: silk* Ø 28 cm (11")
 lampholder: E 27, max. 100 W

		€
ELAS S – Ms	Solid brass polished, lacquered	717.–
ELAS S – Ni	Solid brass, nickel plated	717.–
ELAS S – Mt	Solid brass matt brushed, lacquered	768.–
ELAS S – Nm	Solid brass nickel plated, matt brushed	768.–
ELAS S – Cr	Solid brass, chrome-plated	768.–

Additional USA 110 V conversion kit 12.–
 110 V bulbs not included

* fabric required: 50 x 80 cm (19.7" x 31.5")

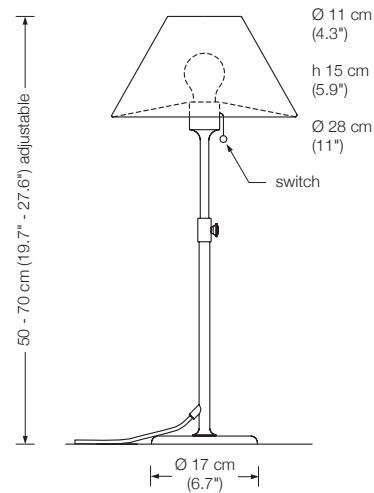



PIN W dim


wall lamp

height: 48 cm (18.9")
 width: 65 cm (25.6")
 bulb: LED-Line 150 incl.
 exchangeable
 approx. 840 Lumen
 color temperature: warmwhite 2700 Kelvin

		€
PIN W dim – Ms	Solid brass polished, lacquered	714.–
PIN W dim – Ni	Solid brass, nickel plated	714.–
PIN W dim – Mt	Solid brass matt brushed, lacquered	785.–
PIN W dim – Nm	Solid brass nickel plated, matt brushed	785.–
PIN W dim – Cr	Solid brass, chrome-plated	785.–

Additional USA 110 V conversion kit 31.–

Energy class: A++ to A

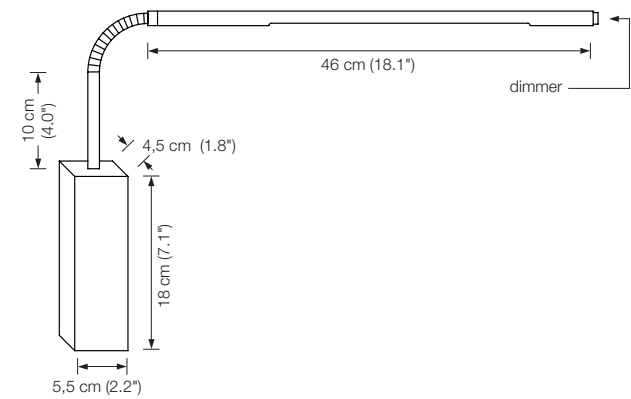

BLOC


wall lamp


height: 5 cm (1.97")
width: 32 cm (12.6")
depth: 4 cm (1.6")
bulb: 2 x LED-Line 150 incl.
exchangeable
approx. 1380 Lumen in total
color temperature: warmwhite 2700 Kelvin

		€
BLOC – Ms	Solid brass polished, lacquered	504.–
BLOC – Ni	Solid brass, nickel plated	504.–
BLOC – Mt	Solid brass matt brushed, lacquered	546.–
BLOC – Nm	Solid brass nickel plated, matt brushed	546.–
BLOC – Cr	Solid brass, chrome-plated	546.–

Energy class: A++ to A

This model is not available for 110 Volt/USA.

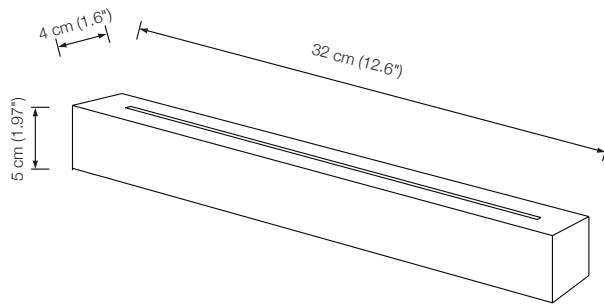

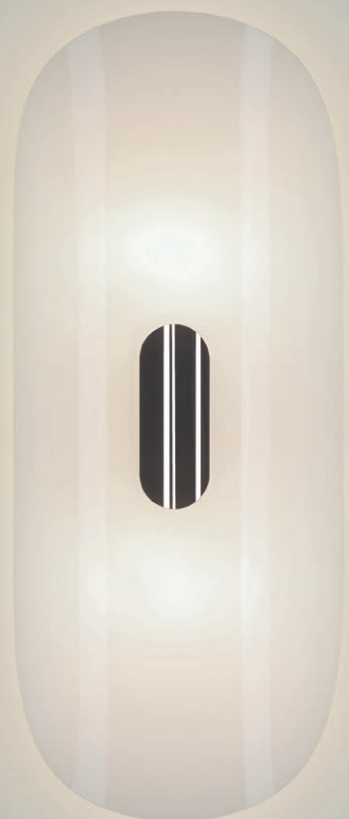


GEA

wall lamp
 height: 43 cm (16.9")
 shade: glass white-opal
 lampholder: 2 x E 27, max. 2 x 100 W

		€
GEA – Ms	Solid brass polished, lacquered	618.–
GEA – Ni	Solid brass, nickel plated	618.–
GEA – Mt	Solid brass matt brushed, lacquered	649.–
GEA – Nm	Solid brass nickel plated, matt brushed	649.–
GEA – Cr	Solid brass, chrome-plated	649.–

4" junction box: not covered
 Backplate rectangular 25 x 10 cm (9.8" x 3.9", standard)
 or 25 x 12 cm (9.8" x 4.7", please indicate with order) 166.–

Additional USA 110 V conversion kit: 12.–
 110 V bulbs not included

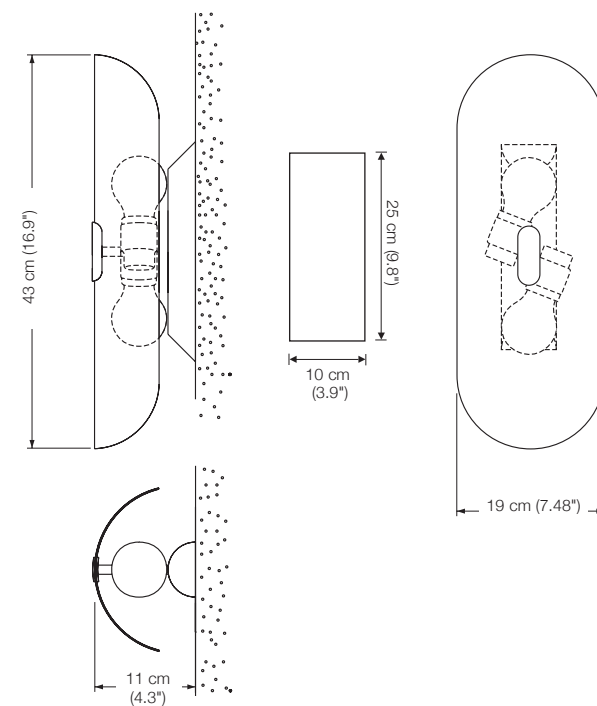

ALIA

wall lamp
indirect light


height: 47 cm (18.5")
shade: metal
lampholder: 2 x E 27, max. 2 x 100 W

		€
ALIA – Ms	Solid brass polished, lacquered	746.–
ALIA – Ni	Solid brass, nickel plated	746.–
ALIA – Mt	Solid brass matt brushed, lacquered	820.–
ALIA – Nm	Solid brass nickel plated, matt brushed	820.–
ALIA – Cr	Solid brass, chrome-plated	820.–

4" junction box: not covered

Backplate rectangular 25 x 10 cm (9.8" x 3.9", standard)
or 25 x 12 cm (9.8" x 4.7", please indicate with order) 166.–

Additional USA 110 V conversion kit: 12.–
110 V bulbs not included

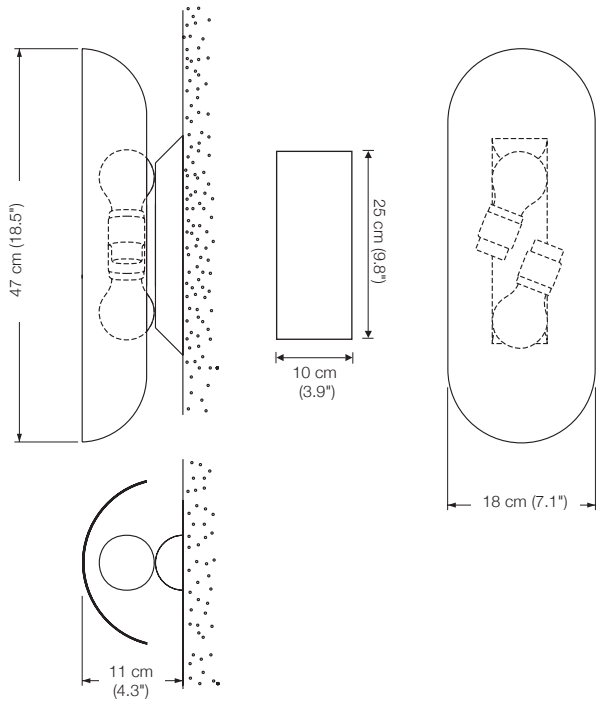



WED

wall lamp
 width: 40 cm (15.7")
 lampholder: GU 5.3
 bulb: LED-Spot 36° incl.
 exchangeable
 approx. 390 Lumen
 color temperature: warmwhite 2700 Kelvin


		€
WED – Ms	Solid brass polished, lacquered	609.–
WED – Ni	Solid brass, nickel plated	609.–
WED – Mt	Solid brass matt brushed, lacquered	670.–
WED – Nm	Solid brass nickel plated, matt brushed	670.–
WED – Cr	Solid brass, chrome-plated	670.–

4" junction box: not covered
 Backplate Ø 12 cm (4.72") 68.–

Additional USA 110 V conversion kit 12.–

Energy class: A++ to A

Replacement bulbs can be ordered through VS Manufaktur.

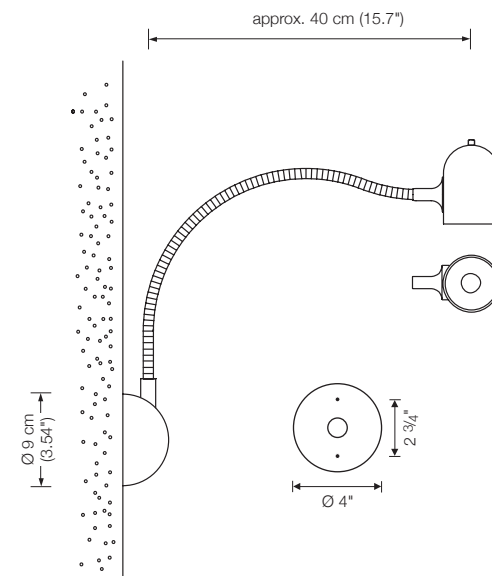

ERA 33

wall lamp
width: 33 cm (13")
bottom glass diffuser
lampholder: 2 x G9, max. 2 x 75 W / 230 V
bulb: 2 x OSRAM HALOPIN ECO 60 W incl.

		€
ERA 33 – Ms	Solid brass polished, lacquered	609.–
ERA 33 – Ni	Solid brass, nickel plated	609.–
ERA 33 – Mt	Solid brass matt brushed, lacquered	670.–
ERA 33 – Nm	Solid brass nickel plated, matt brushed	670.–
ERA 33 – Cr	Solid brass, chrome-plated	670.–

additional top glass diffuser 25.–
Please indicate with order

4" junction box: not covered
Additional USA 110 V conversion kit 12.–
110 V bulbs not included


ERA 40

wall lamp
width: 40 cm (15.7")
bottom glass diffuser
lampholder: B15d, max. 150 W / 230 V
bulb: OSRAM HALOLUX CERAM ECO 100 W incl.

		€
ERA 40 – Ms	Solid brass polished, lacquered	714.–
ERA 40 – Ni	Solid brass, nickel plated	714.–
ERA 40 – Mt	Solid brass matt brushed, lacquered	785.–
ERA 40 – Nm	Solid brass nickel plated, matt brushed	785.–
ERA 40 – Cr	Solid brass, chrome-plated	785.–

additional top glass diffuser 27.–
Please indicate with order

4" junction box: not covered
Additional USA 110 V conversion kit 12.–
110 V bulbs not included

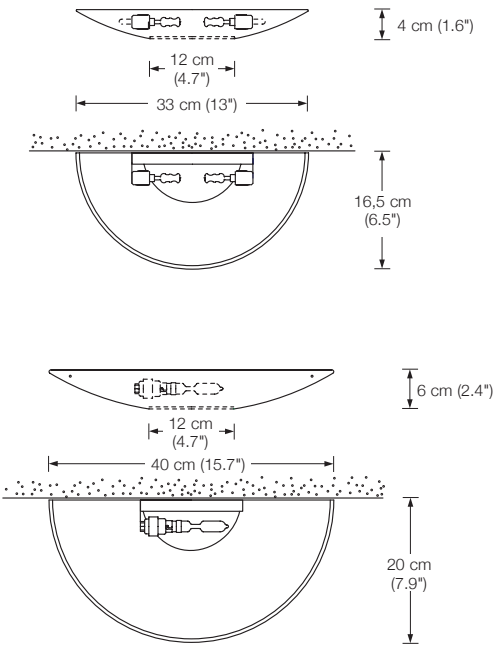




BEO

wall and stairway lamp
 direct and indirect light
 glass diffuser top and bottom
 width: 36 cm (14.2")
 lampholder: 2 x E 27, max. 2 x 100 W

		€
BEO - Ms	Solid brass polished, lacquered	929.-
BEO - Ni	Solid brass, nickel plated	929.-
BEO - Mt	Solid brass matt brushed, lacquered	1023.-
BEO - Nm	Solid brass nickel plated, matt brushed	1023.-
BEO - Cr	Solid brass, chrome-plated	1023.-

4" junction box: covered
 Additional USA 110 V conversion kit 12.-
 110 V bulbs not included

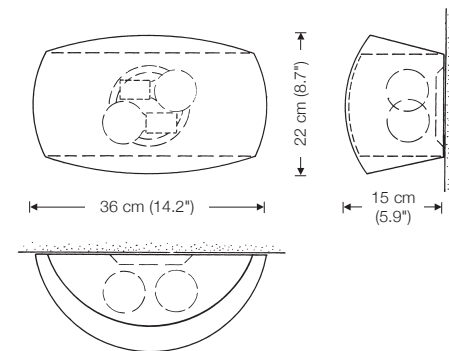

WIN

wall lamp

height: 55 - ca. 80 cm (21.7" - 31.5") adjustable

shade: TEFLON white Ø 18 cm (7.1")


lampholder: GY 6.35, max. 50 W / 12 V

bulb: OSRAM HALOSTAR ECO 35 W (equal 50 W) incl.

dimmer: built in

		€
WIN – Ms	Solid brass polished, lacquered	1043.–
WIN – Ni	Solid brass, nickel plated	1043.–
WIN – Mt	Solid brass matt brushed, lacquered	1147.–
WIN – Nm	Solid brass nickel plated, matt brushed	1147.–
WIN – Cr	Solid brass, chrome-plated	1147.–

This model is not available for 110 Volt/USA.

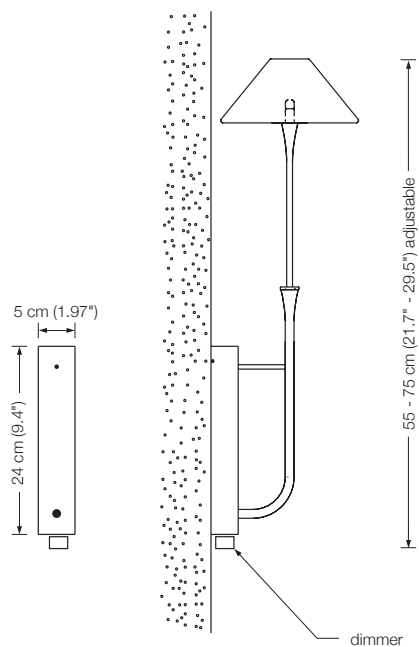



EREA 80

ceiling lamp height: standard 100 cm (39.4")
or on request
(min. 60 cm (23.6") to max. 200 cm (78.7"))

shade: glass white-opal Ø 80 cm (31.5")

lampholder: 6 x E 27, max. 6 x 205 W


		€
EREA 80 – Ms	Solid brass polished, lacquered	2074.–
EREA 80 – Ni	Solid brass, nickel plated	2074.–
EREA 80 – Mt	Solid brass matt brushed, lacquered	2219.–
EREA 80 – Nm	Solid brass nickel plated, matt brushed	2219.–
EREA 80 – Cr	Solid brass, chrome-plated	2219.–

4" junction box: not covered

Backplate Ø 12 cm (4.72") 68.–

Additional 110 V conversion kit: 36.–

110 V bulbs not included

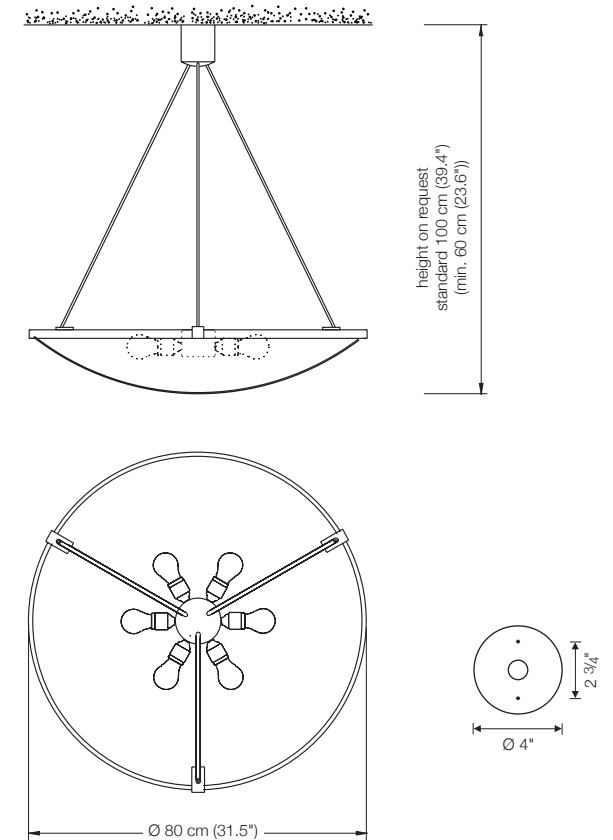

SOLA 80

ceiling lamp
direct and indirect light
bottom glass diffuser

height: 36 - 65 cm (14.2" - 25.6") adjustable *
shade: metal Ø 80 cm (31.5")
lampholder: R7s, max. 500 W
bulb: OSRAM HALOLINE ECO 400 W incl.


		€
SOLA 80 – Ms	Solid brass polished, lacquered	2918.-
SOLA 80 – Ni	Solid brass, nickel plated	2918.-
SOLA 80 – Mt	Solid brass matt brushed, lacquered	3210.-
SOLA 80 – Nm	Solid brass nickel plated, matt brushed	3210.-
SOLA 80 – Cr	Solid brass, chrome-plated	3210.-

4" junction box: covered

Additional USA 110 V conversion kit 12.-

110 V bulbs not included

* special length on request

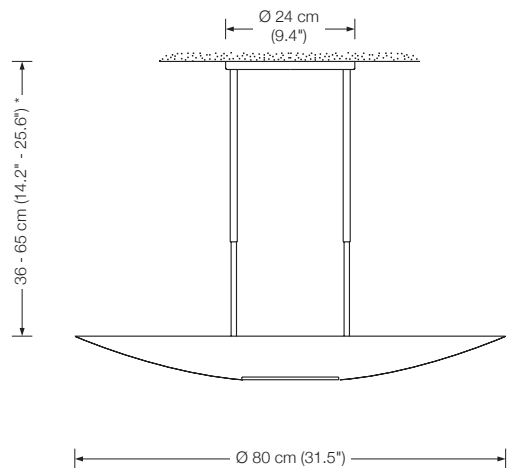

GELA 40

wall / ceiling lamp

shade: glass white-opal Ø 40 cm (15.7")
lampholder: 5 x E 14, max. 5 x 60 W


GELA 40 – Ms	Solid brass polished, lacquered
GELA 40 – Ni	Solid brass, nickel plated
GELA 40 – Mt	Solid brass matt brushed, lacquered
GELA 40 – Nm	Solid brass nickel plated, matt brushed
GELA 40 – Cr	Solid brass, chrome-plated

4" junction box: not covered
Backplate Ø 12 cm (4.72")
Additional 110 V conversion kit:
110 V bulbs not included

special length (distance to wall / ceiling) on request

€
647.–
647.–
679.–
679.–
679.–

68.–
12.–

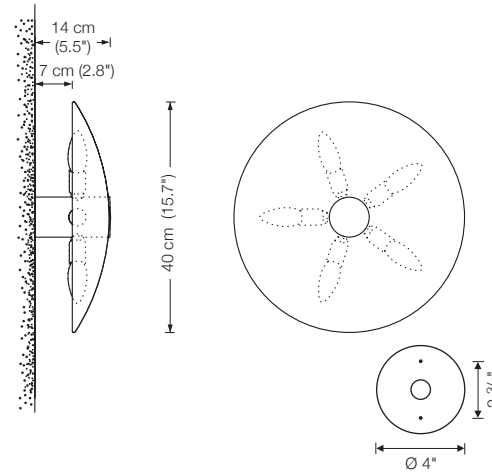

GELA 80

ceiling lamp

shade: glass white-opal Ø 80 cm (31.5")
lampholder: 7 x E 27, max. 7 x 100 W


GELA 80 – Ms	Solid brass polished, lacquered
GELA 80 – Ni	Solid brass, nickel plated
GELA 80 – Mt	Solid brass matt brushed, lacquered
GELA 80 – Nm	Solid brass nickel plated, matt brushed
GELA 80 – Cr	Solid brass, chrome-plated

4" junction box: not covered
Backplate Ø 12 cm (4.72")
Additional 110 V conversion kit:
110 V bulbs not included

special length (distance to ceiling) on request

€
1385.–
1385.–
1454.–
1454.–
1454.–

68.–
12.–

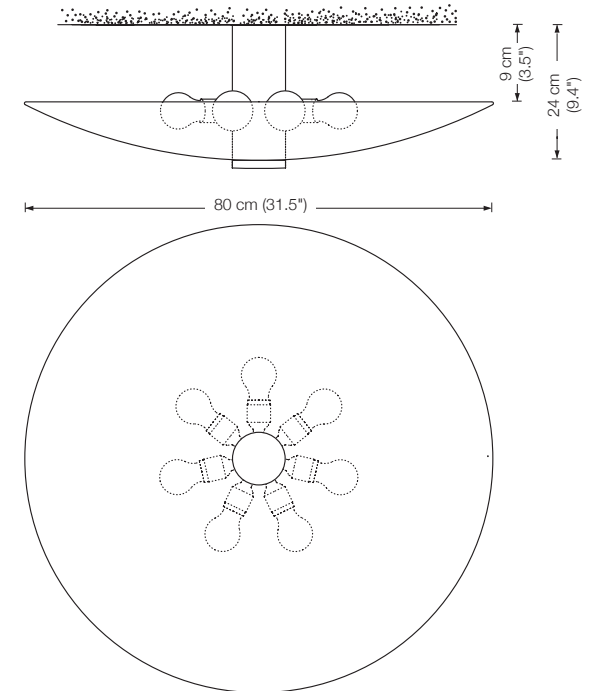

GELA 55

ceiling lamp

shade: glass white-opal Ø 55 cm (21.7")
lampholder: 5 x E 27, max. 5 x 100 W


GELA 55 – Ms	Solid brass polished, lacquered
GELA 55 – Ni	Solid brass, nickel plated
GELA 55 – Mt	Solid brass matt brushed, lacquered
GELA 55 – Nm	Solid brass nickel plated, matt brushed
GELA 55 – Cr	Solid brass, chrome-plated

4" junction box: not covered
Backplate Ø 12 cm (4.72")
Additional 110 V conversion kit:
110 V bulbs not included

special length (distance to ceiling) on request

€
671.–
671.–
705.–
705.–
705.–

68.–
12.–

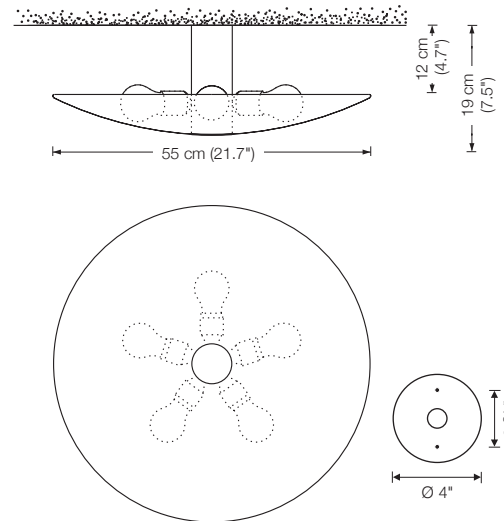





SELA 55

ceiling lamp
indirect lighting
shade:
lampholder:

metal Ø 55 cm (21.7")
5 x E 27, max. 5 x 100 W

€

SELA 55 – Ms	Solid brass polished, lacquered	882.–
SELA 55 – Ni	Solid brass, nickel plated	882.–
SELA 55 – Mt	Solid brass matt brushed, lacquered	970.–
SELA 55 – Nm	Solid brass nickel plated, matt brushed	970.–
SELA 55 – Cr	Solid brass, chrome-plated	970.–


4" junction box: not covered

Backplate Ø 12 cm (4.72") 68.–

Additional 110 V conversion kit: 36.–

110 V bulbs not included

special length (distance to ceiling) on request

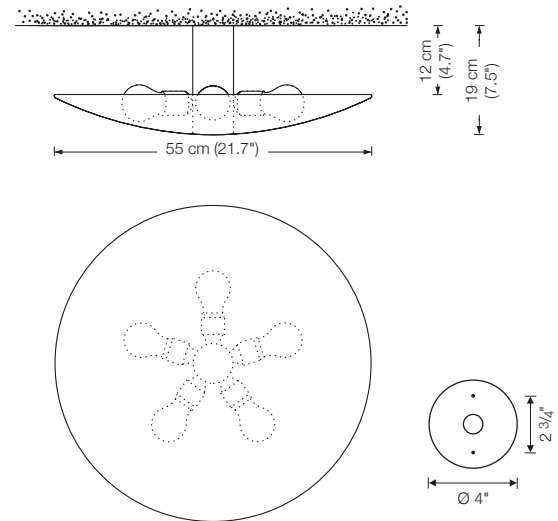

OLA 36

ceiling lamp

height: 20 cm (7.9")

shade: glass white-opal, Ø 36 cm (14.2")

lampholder: 3 x E 27, max. 3 x 100 W



		€
OLA 36 – Ms	Solid brass polished, lacquered	508.–
OLA 36 – Ni	Solid brass, nickel plated	508.–
OLA 36 – Mt	Solid brass matt brushed, lacquered	533.–
OLA 36 – Nm	Solid brass nickel plated, matt brushed	533.–
OLA 36 – Cr	Solid brass, chrome-plated	533.–

4" junction box: covered

Additional USA 110 V conversion kit

110 V bulbs not included

24.–

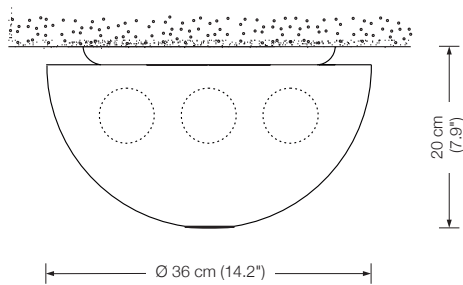



POSA 36 P – pendant

Pendant lamp
 shade: glass white-opal, Ø 36 cm (14.2")
 lampholder: E 27, max. 100 W

		€
POSA 36 P – Ms	Solid brass polished, lacquered	525.–
POSA 36 P – Ni	Solid brass, nickel plated	525.–
POSA 36 P – Mt	Solid brass matt brushed, lacquered	551.–
POSA 36 P – Nm	Solid brass nickel plated, matt brushed	551.–
POSA 36 P – Cr	Solid brass, chrome-plated	551.–

4" junction box: covered
 Additional USA 110 V conversion kit 12.–
 110 V bulbs not included



POSA 36 M – center pull

Adjustable pendant lamp
 shade: glass white-opal, Ø 36 cm (14.2")
 lampholder: E 27, max. 100 W

		€
POSA 36 M – Ms	Solid brass polished, lacquered	810.–
POSA 36 M – Ni	Solid brass, nickel plated	810.–
POSA 36 M – Mt	Solid brass matt brushed, lacquered	851.–
POSA 36 M – Nm	Solid brass nickel plated, matt brushed	851.–
POSA 36 M – Cr	Solid brass, chrome-plated	851.–

4" junction box: covered by US canopy Ø 12 cm (4.7") 152.–
 Additional USA 110 V conversion kit: 12.–
 110 V bulbs not included



POSA 36 S – side pull

Adjustable pendant lamp
 shade: glass white-opal, Ø 36 cm (14.2")
 lampholder: E 27, max. 100 W

		€
POSA 36 S – Ms	Solid brass polished, lacquered	810.–
POSA 36 S – Ni	Solid brass, nickel plated	810.–
POSA 36 S – Mt	Solid brass matt brushed, lacquered	851.–
POSA 36 S – Nm	Solid brass nickel plated, matt brushed	851.–
POSA 36 S – Cr	Solid brass, chrome-plated	851.–

4" junction box: covered by US canopy Ø 12 cm (4.7") 84.–
 Additional USA 110 V conversion kit: 12.–
 110 V bulbs not included



POSA 36 R – straight pull ceiling mounted

Adjustable pendant lamp

shade: glass white-opal, Ø 36 cm (14.2")

lampholder: E 27, max. 100 W

POSA 36 R – Ms	Solid brass polished, lacquered	€ 912.–
POSA 36 R – Ni	Solid brass, nickel plated	€ 912.–
POSA 36 R – Mt	Solid brass matt brushed, lacquered	€ 958.–
POSA 36 R – Nm	Solid brass nickel plated, matt brushed	€ 958.–
POSA 36 R – Cr	Solid brass, chrome-plated	€ 958.–

4" junction box: not necessary

Additional USA 110 V conversion kit

110 V bulbs not included

€
912.–
912.–
958.–
958.–
958.–

12.–



POSA 36 D – double pull

Adjustable pendant lamp

shade: glass white-opal, Ø 36 cm (14.2")

lampholder: 2 x E 27, max. 2 x 100 W

POSA 36 D – Ms	Solid brass polished, lacquered	€ 1421.–
POSA 36 D – Ni	Solid brass, nickel plated	€ 1421.–
POSA 36 D – Mt	Solid brass matt brushed, lacquered	€ 1491.–
POSA 36 D – Nm	Solid brass nickel plated, matt brushed	€ 1491.–
POSA 36 D – Cr	Solid brass, chrome-plated	€ 1491.–

4" junction box: covered by US canopy Ø 12 cm (4.7")

Additional USA 110 V conversion kit:

110 V bulbs not included

€
1421.–
1421.–
1491.–
1491.–
1491.–


88.–
12.–





ONOS 55 P – pendant

Pendant lamp		
shade:	metal Ø 55 cm (21.7")	
	metal light diffuser	
lampholder:	E 27, max. 100 W	
		€
ONOS 55 P – Ms	Solid brass polished, lacquered	1134.–
ONOS 55 P – Ni	Solid brass, nickel plated	1134.–
ONOS 55 P – Mt	Solid brass matt brushed, lacquered	1247.–
ONOS 55 P – Nm	Solid brass nickel plated, matt brushed	1247.–
ONOS 55 P – Cr	Solid brass, chrome-plated	1247.–
4" junction box: covered		
Additional USA 110 V conversion kit		12.–
110 V bulbs not included		

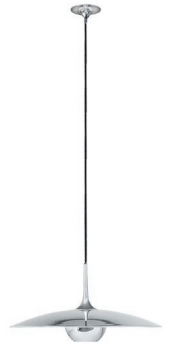

ONOS 55 M – center pull

Adjustable pendant lamp		
shade:	metal Ø 55 cm (21.7")	
	metal light diffuser	
lampholder:	E 27, max. 100 W	
		€
ONOS 55 M – Ms	Solid brass polished, lacquered	1397.–
ONOS 55 M – Ni	Solid brass, nickel plated	1397.–
ONOS 55 M – Mt	Solid brass matt brushed, lacquered	1536.–
ONOS 55 M – Nm	Solid brass nickel plated, matt brushed	1536.–
ONOS 55 M – Cr	Solid brass, chrome-plated	1536.–
4" junction box: covered by US canopy Ø 12 cm (4.7")		152.–
Additional USA 110 V conversion kit:		12.–
110 V bulbs not included		



ONOS 55 S – side pull

Adjustable pendant lamp		
shade:	metal Ø 55 cm (21.7")	
	metal light diffuser	
lampholder:	E 27, max. 100 W	
		€
ONOS 55 S – Ms	Solid brass polished, lacquered	1397.–
ONOS 55 S – Ni	Solid brass, nickel plated	1397.–
ONOS 55 S – Mt	Solid brass matt brushed, lacquered	1536.–
ONOS 55 S – Nm	Solid brass nickel plated, matt brushed	1536.–
ONOS 55 S – Cr	Solid brass, chrome-plated	1536.–
4" junction box: covered by US canopy Ø 12 cm (4.7")		84.–
Additional USA 110 V conversion kit:		12.–
110 V bulbs not included		



ONOS 55 R – straight pull ceiling mounted

Adjustable pendant lamp

shade: metal Ø 55 cm (21.7")
metal light diffuser

lampholder: E 27, max. 100 W

ONOS 55 R – Ms	Solid brass polished, lacquered	€ 1575.–
ONOS 55 R – Ni	Solid brass, nickel plated	1575.–
ONOS 55 R – Mt	Solid brass matt brushed, lacquered	1733.–
ONOS 55 R – Nm	Solid brass nickel plated, matt brushed	1733.–
ONOS 55 R – Cr	Solid brass, chrome-plated	1733.–

4" junction box: not necessary

Additional USA 110 V conversion kit

110 V bulbs not included

12.–



ONOS 55 D – double pull

Adjustable pendant lamp

shade: metal Ø 55 cm (21.7")
metal light diffuser

lampholder: 2 x E 27, max. 2 x 100 W

ONOS 55 D – Ms	Solid brass polished, lacquered	€ 2562.–
ONOS 55 D – Ni	Solid brass, nickel plated	2562.–
ONOS 55 D – Mt	Solid brass matt brushed, lacquered	2818.–
ONOS 55 D – Nm	Solid brass nickel plated, matt brushed	2818.–
ONOS 55 D – Cr	Solid brass, chrome-plated	2818.–

4" junction box: covered by US canopy Ø 12 cm (4.7")

Additional USA 110 V conversion kit:

110 V bulbs not included

88.–

12.–





ONOS 40 P – pendant

Pendant lamp		
shade:	metal Ø 40 cm (15.7") metal light diffuser	
lampholder:	E 27, max. 100 W	
		€
ONOS 40 P – Ms	Solid brass polished, lacquered	924.–
ONOS 40 P – Ni	Solid brass, nickel plated	924.–
ONOS 40 P – Mt	Solid brass matt brushed, lacquered	1016.–
ONOS 40 P – Nm	Solid brass nickel plated, matt brushed	1016.–
ONOS 40 P – Cr	Solid brass, chrome-plated	1016.–
4" junction box: covered		
Additional USA 110 V conversion kit		12.–
110 V bulbs not included		



ONOS 40 M – center pull

Adjustable pendant lamp		
shade:	metal Ø 40 cm (15.7") metal light diffuser	
lampholder:	E 27, max. 100 W	
		€
ONOS 40 M – Ms	Solid brass polished, lacquered	1239.–
ONOS 40 M – Ni	Solid brass, nickel plated	1239.–
ONOS 40 M – Mt	Solid brass matt brushed, lacquered	1363.–
ONOS 40 M – Nm	Solid brass nickel plated, matt brushed	1363.–
ONOS 40 M – Cr	Solid brass, chrome-plated	1363.–
4" junction box: covered by US canopy Ø 12 cm (4.7")		152.–
Additional USA 110 V conversion kit:		12.–
110 V bulbs not included		



ONOS 40 S – side pull

Adjustable pendant lamp		
shade:	metal Ø 40 cm (15.7") metal light diffuser	
lampholder:	E 27, max. 100 W	
		€
ONOS 40 S – Ms	Solid brass polished, lacquered	1239.–
ONOS 40 S – Ni	Solid brass, nickel plated	1239.–
ONOS 40 S – Mt	Solid brass matt brushed, lacquered	1363.–
ONOS 40 S – Nm	Solid brass nickel plated, matt brushed	1363.–
ONOS 40 S – Cr	Solid brass, chrome-plated	1363.–
4" junction box: covered by US canopy Ø 12 cm (4.7")		84.–
Additional USA 110 V conversion kit:		12.–
110 V bulbs not included		



ONOS 40 R – straight pull ceiling mounted

Adjustable pendant lamp

shade: metal Ø 40 cm (15.7")
metal light diffuser

lampholder: E 27, max. 100 W

ONOS 40 R – Ms	Solid brass polished, lacquered	€ 1418.–
ONOS 40 R – Ni	Solid brass, nickel plated	1418.–
ONOS 40 R – Mt	Solid brass matt brushed, lacquered	1559.–
ONOS 40 R – Nm	Solid brass nickel plated, matt brushed	1559.–
ONOS 40 R – Cr	Solid brass, chrome-plated	1559.–

4" junction box: not necessary

Additional USA 110 V conversion kit

110 V bulbs not included

€ 12.–



ONOS 40 D – double pull

Adjustable pendant lamp

shade: metal Ø 40 cm (15.7")
metal light diffuser

lampholder: 2 x E 27, max. 2 x 100 W

ONOS 40 D – Ms	Solid brass polished, lacquered	€ 2310.–
ONOS 40 D – Ni	Solid brass, nickel plated	2310.–
ONOS 40 D – Mt	Solid brass matt brushed, lacquered	2541.–
ONOS 40 D – Nm	Solid brass nickel plated, matt brushed	2541.–
ONOS 40 D – Cr	Solid brass, chrome-plated	2541.–


4" junction box: covered by US canopy Ø 12 cm (4.7")

Additional USA 110 V conversion kit:

110 V bulbs not included

€ 88.–




€ 12.–

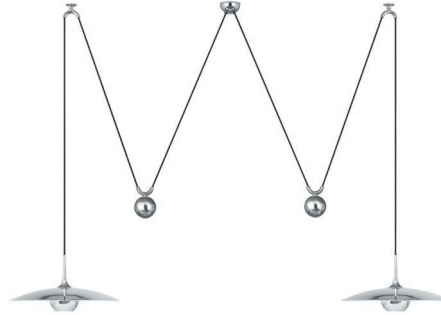

Ceiling guiding system for pendant lamps DESY

With the elements of this system ceiling guides for pendant lamp groups are combinable.

A simple rehanging of the shades allows an illumination even of temporary table combinations (e.g. long table, around the corner etc).

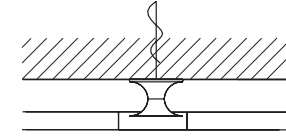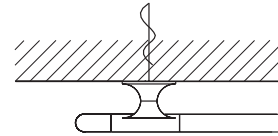

DESY-ST

rod max. 80 cm (31.5")

	€
Ms Solid brass polished, lacquered	48.-
Ni Solid brass, nickel plated	48.-
Mt Solid brass matt brushed, lacquered	54.-
Nm Solid brass nickel plated, matt brushed	54.-
Cr Solid brass, chrome-plated	54.-

DESY-E


end piece

	€
Ms Solid brass polished, lacquered	91.-
Ni Solid brass, nickel plated	91.-
Mt Solid brass matt brushed, lacquered	101.-
Nm Solid brass nickel plated, matt brushed	101.-
Cr Solid brass, chrome-plated	101.-

DESY-M

center piece


	€
Ms Solid brass polished, lacquered	64.-
Ni Solid brass, nickel plated	64.-
Mt Solid brass matt brushed, lacquered	70.-
Nm Solid brass nickel plated, matt brushed	70.-
Cr Solid brass, chrome-plated	70.-

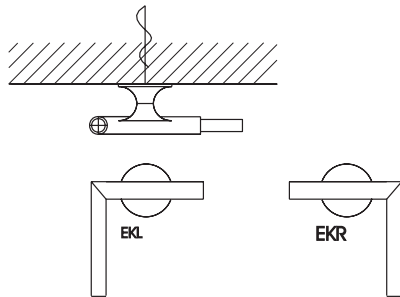

DESY-Ekl corner piece left side (standard)

DESY-Ekr corner piece right side


	€
Ms Solid brass polished, lacquered	127.-
Ni Solid brass, nickel plated	127.-
Mt Solid brass matt brushed, lacquered	140.-
Nm Solid brass nickel plated, matt brushed	140.-
Cr Solid brass, chrome-plated	140.-

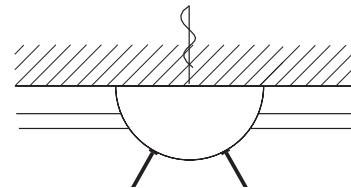

DESY-D

canopy for center cable outlet

	€
Ms Solid brass polished, lacquered	141.-
Ni Solid brass, nickel plated	141.-
Mt Solid brass matt brushed, lacquered	154.-
Nm Solid brass nickel plated, matt brushed	154.-
Cr Solid brass, chrome-plated	154.-

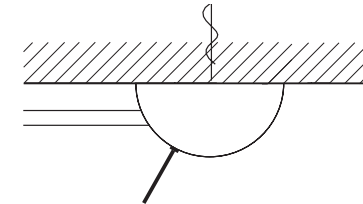


DESY-S

canopy for end cable outlet

	€
Ms Solid brass polished, lacquered	134.-
Ni Solid brass, nickel plated	134.-
Mt Solid brass matt brushed, lacquered	148.-
Nm Solid brass nickel plated, matt brushed	148.-
Cr Solid brass, chrome-plated	148.-


DESY Example

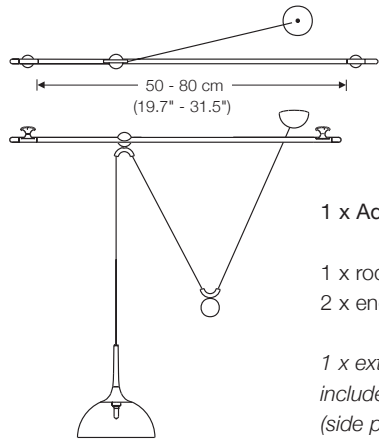

1 x Adjustable pendant lamp – S (side pull)


1 x rod DESY-ST
2 x end pieces DESY-E

1 x external canopy
included in Adjustable pendant lamp – S
(side pull).

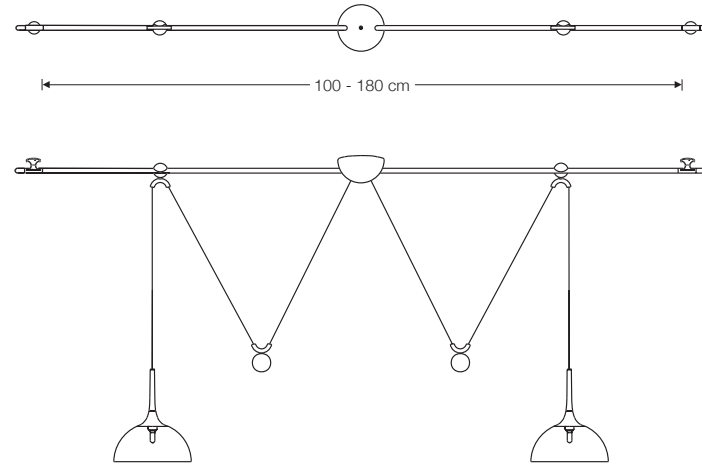

1 x Adjustable pendant lamp – D
(double pull)


2 x rods DESY-ST
2 x end pieces DESY-E
1 x canopy DESY-D

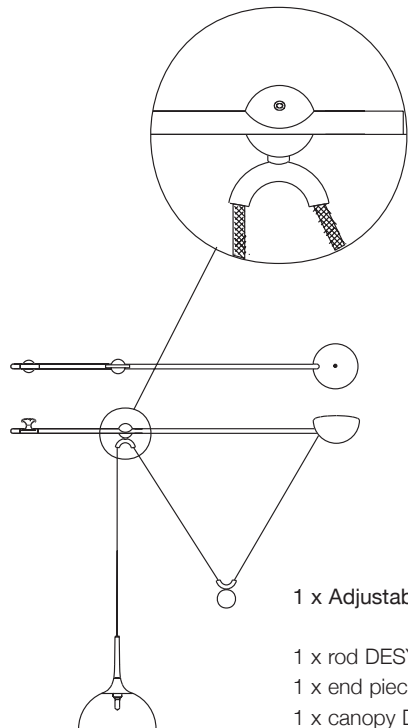

This upper
cable guide is a
lockable hook.

1 x Adjustable pendant lamp – S (side pull)


1 x rod DESY-ST
1 x end piece DESY-E
1 x canopy DESY-S

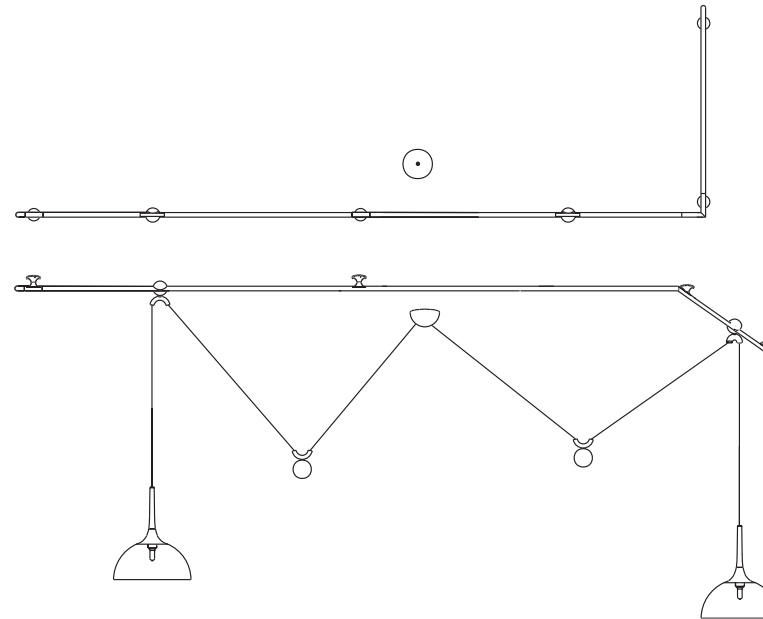

1 x Adjustable pendant lamp – D
(double pull)

3 x rods DESY-ST
2 x end pieces DESY-E
1 x center piece DESY-M
1 x corner piece DESY-EK

1 x external canopy
included in Adjustable pendant lamp – D
(double pull)

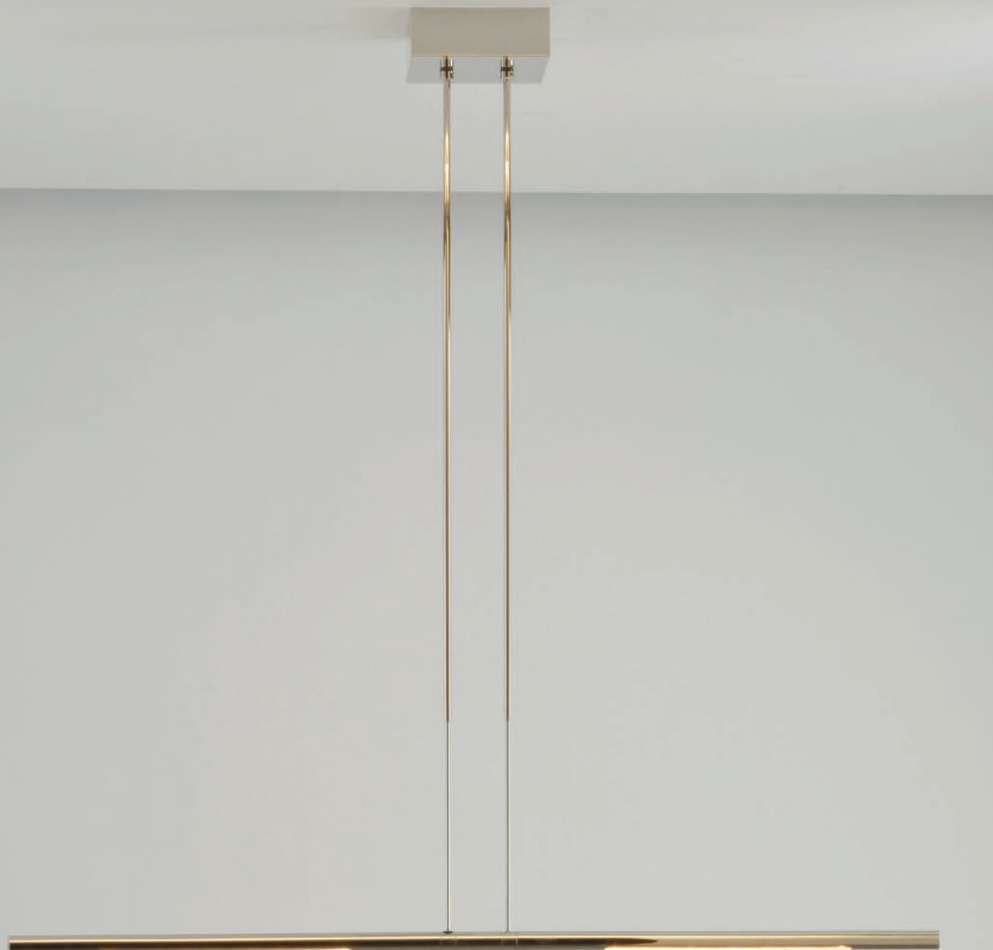

PEN 100


pendant lamp, height adjustable
both light elements can be rotated (360°)

length: 100 cm (39.4")
canopy: 15 x 15 x 5 cm (5.9" x 5.9" x 2.0")
height: 80 to 140 cm (31.5" to 55.1") adjustable
illuminant: 2 x LED-Line 150 incl.
exchangeable
approx. 1200 Lumen
color temperature: warmwhite 2700 K

		€
PEN 100 – Ms	Solid brass polished, lacquered	1344.–
PEN 100 – Ni	Solid brass, nickel plated	1344.–
PEN 100 – Mt	Solid brass matt brushed, lacquered	1449.–
PEN 100 – Nm	Solid brass nickel plated, matt brushed	1449.–
PEN 100 – Cr	Solid brass, chrome-plated	1449.–

4" junction box: covered
Additional USA 110 V conversion kit: 40.–

Energy class: A++ to A

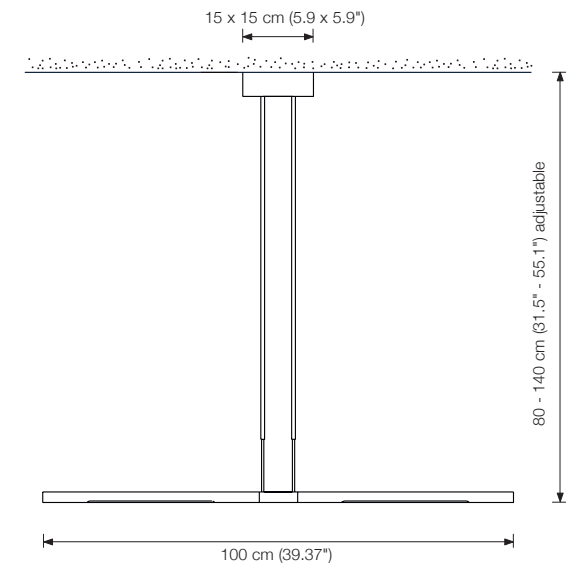

PEN 121


pendant lamp, height adjustable
outer light elements can be rotated (360°)

length: 121 cm (47.6")
canopy: 46,5 x 5 x 5 cm (18.3" x 2.0" x 2.0")
height: 80 to 140 cm (31.5" to 55.1") adjustable
width: 121 cm (47.6")
bulb: 3 x LED-Line 150 incl.
exchangeable
approx. 2200 Lumen
color temperature: warmwhite 2700 K

		€
PEN 121 – Ms	Solid brass polished, lacquered	1659.–
PEN 121 – Ni	Solid brass, nickel plated	1659.–
PEN 121 – Mt	Solid brass matt brushed, lacquered	1817.–
PEN 121 – Nm	Solid brass nickel plated, matt brushed	1817.–
PEN 121 – Cr	Solid brass, chrome-plated	1817.–

4" junction box: not covered
Additional USA 110 V conversion kit:
including a rectangular backplate of
51 x 12 cm (20.1" x 4.7")
120.–

Energy class: A++ to A

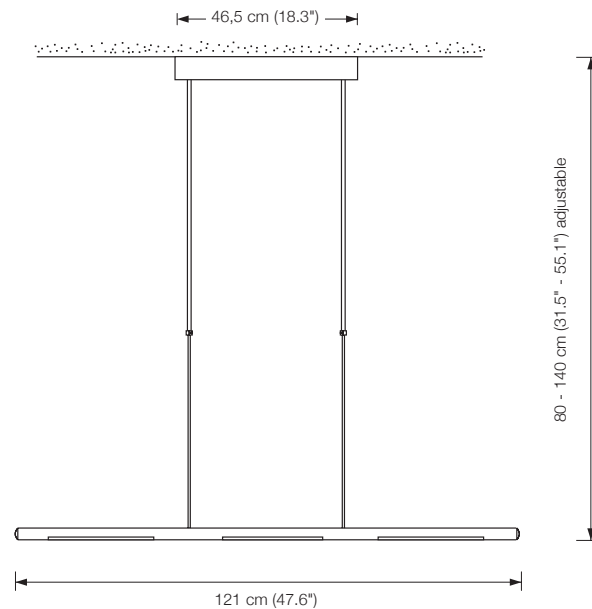



PEN 142


pendant lamp, height adjustable
all light elements can be rotated (360°)

length: 142 cm (55.9")
 canopy: 53 x 5 x 5 cm (20.9" x 2.0" x 2.0")
 height: 80 to 140 cm (31.5" to 55.1") adjustable
 width: 142 cm (55.9")
 bulb: 3 x LED-Line 150 incl.
 exchangeable
 approx. 2200 Lumen
 color temperature: warmwhite 2700 K

		€
PEN 142 – Ms	Solid brass polished, lacquered	1659.–
PEN 142 – Ni	Solid brass, nickel plated	1659.–
PEN 142 – Mt	Solid brass matt brushed, lacquered	1817.–
PEN 142 – Nm	Solid brass nickel plated, matt brushed	1817.–
PEN 142 – Cr	Solid brass, chrome-plated	1817.–

4" junction box: not covered
 Additional USA 110 V conversion kit:
 including a rectangular backplate of
 57,5 x 12 cm (22.6" x 4.7") 120.–

Energy class: A++ to A

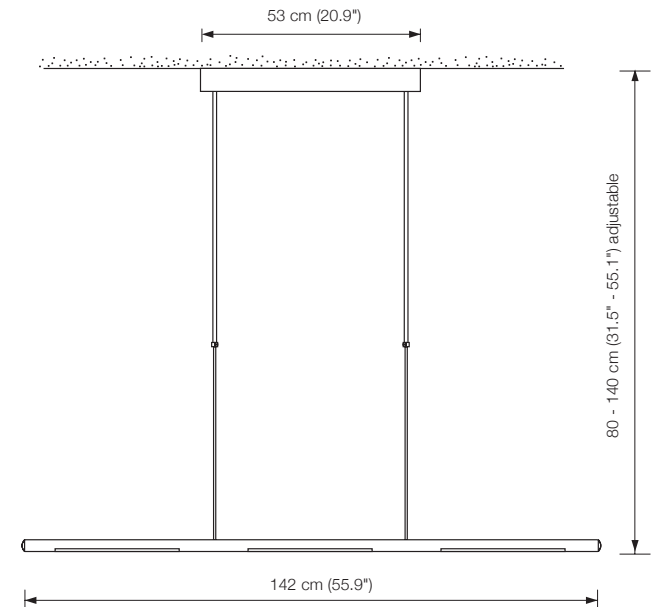





OY 55


spot
rotatable 360°
height of shade: 8,4 cm (3.3")
Ø shade: 5,5 cm (2.2")
Ø canopy: 9 cm (3.5")
lampholder: GU 10
bulb: LED Spot Retrofit
exchangeable
approx. 350 Lumen
color temperature: warmwhite 2700 Kelvin

		€
OY – Ms	Solid brass polished, lacquered	504.-
OY – Ni	Solid brass, nickel plated	504.-
OY – Mt	Solid brass matt brushed, lacquered	546.-
OY – Nm	Solid brass nickel plated, matt brushed	546.-
OY – Cr	Solid brass, chrome-plated	546.-

Energy class: A++ to A

Replacement bulbs can be ordered through VS Manufaktur.

This model is not available for 110 Volt/USA.

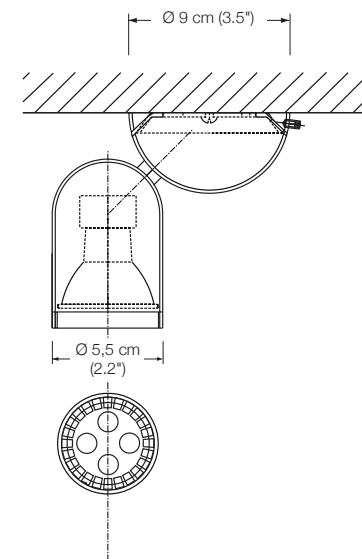

OYO

spotlight
swivelling to all sides
for reflector-lights

Ø wall installation: approx. 12 cm (4.7")
Ø shade: approx. 13 cm (5.1")
lampholder: G53
bulb: LED Spot (8,5 W $\hat{=}$ 50 W), 24 ° incl.*
dimmmable
exchangeable
approx. 450 Lumen
color temperature: warmwhite 2700 K



OYO – Ms	Solid brass polished, lacquered	€ 735.–
OYO – Ni	Solid brass, nickel plated	€ 735.–
OYO – Mt	Solid brass matt brushed, lacquered	€ 809.–
OYO – Nm	Solid brass nickel plated, matt brushed	€ 809.–
OYO – Cr	Solid brass, chrome-plated	€ 809.–

* optional:

LED Spot (8,5 W $\hat{=}$ 50 W), 24 ° - 4000 K
LED Spot (8,5 W $\hat{=}$ 50 W), 40 ° - 2700 K
LED Spot (15,5 W $\hat{=}$ 75 W), 24 ° - 2700 K
LED Spot (15,5 W $\hat{=}$ 75 W), 24 ° - 4000 K
LED Spot (15,5 W $\hat{=}$ 75 W), 40 ° - 2700 K
Please indicate with order.

4" junction box: covered

Additional USA 110 V conversion kit: € 32.–

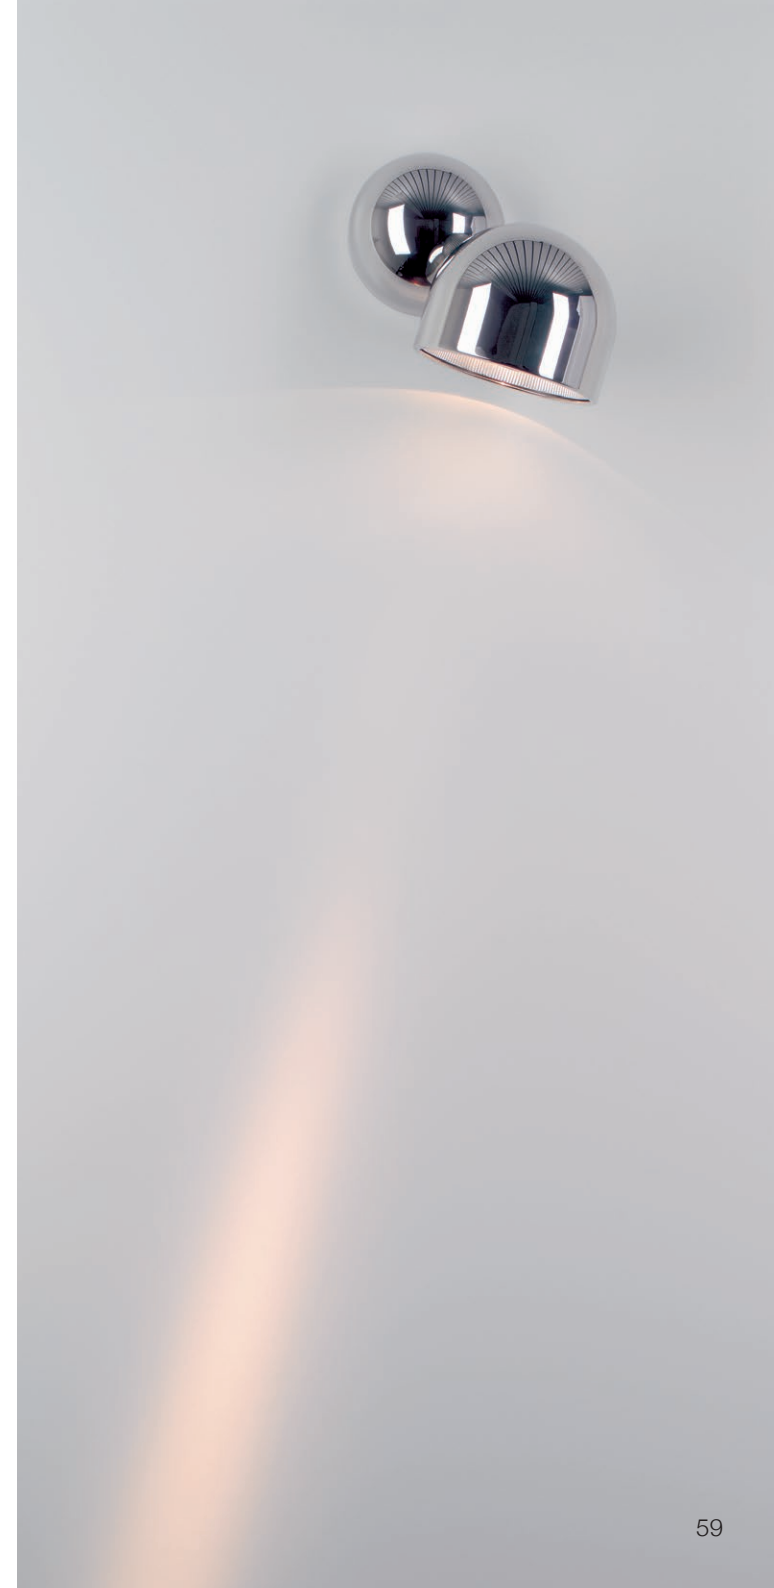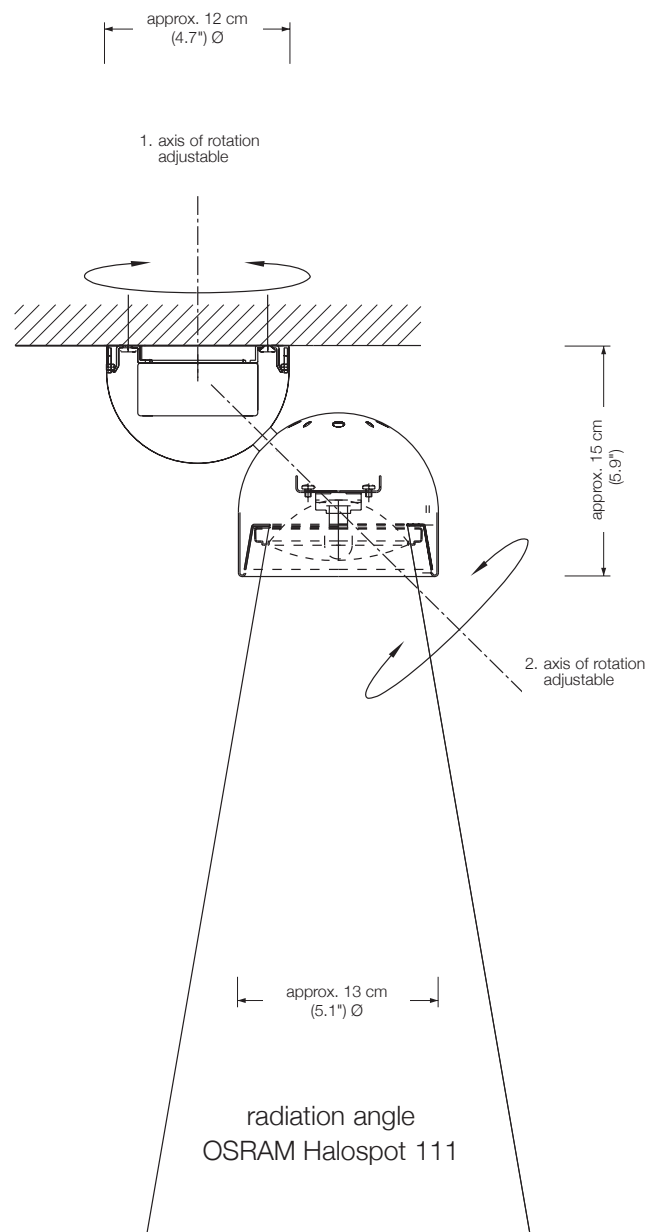



VS Manufaktur
schwieberdinger str. 123
D 71636 Ludwigsburg

tel +49 71 41/46 40 01
fax +49 71 41/46 02 03

www.vs-manufaktur.de
info@vs-manufaktur.de

All rights reserved.
Specifications and design subject to change without notice.