

VS manufaktur
licht + objekt



Timeless craftsmanship

Our mission is to manufacture lamps of lasting value,
in function and in form distinguished
by superior craftsmanship and timeless design.

VS manufaktur
licht + objekt

Collection 2021

Recommended retail price without VAT, valid with effect from February 1st 2021.

With immediate effect, only the models specified in this list are available.
The technical data in this price list shall apply exclusively.

Alphabetical index

page	page	page
ALEA.....45	MESA 18 10	POSA 36 62 – 63
ALIA 45	MESA 24 11	SELA 40 55
BEO 46	MYOS 16	SELA 55 55
CERVANTES.....21	MYOS T 17	SOLA 80 54
CINA W.....48	OKON 13	STE 26
DROP 22 – 23	OLA 25 58	TAOS 40 18
DUOS 36 60 – 61	OLA 36 59	TAOS 40 SD 19
ELAS 42	ONE 58.....6	TAOS 55 18
ELAS S.....42	ONE 80.....7	TAOS 55 SD 19
ERA 33 51	ONOS 40 66 – 67	TAU.....34 – 35
ERA 40 51	ONOS 55 64 – 65	TOA 40
EREA 55.....52	ORA 20 38	TOLED 36
EREA 80.....53	ORA 25 38	TOPAN 32 – 33
ESA.....41	OVA 8 – 9	UNA 20
GEA 44	OYO 74 – 75	VAO 49
GELA 40.....56 – 57	P80-1 68 – 69	VAYO 12
GELA 55.....56 – 57	P80-3 68 – 69	VEA.....50
GELA 80.....56 – 57	PEN 100.....70	WED 47
INAS.....28	PEN 121.....71	YON 30 – 31
INAS SD.....29	PEN 142.....72 – 73	YON G 30 – 31
LESAN M 27	PIN 24 – 25	YON T 39
LESAN S.....27	PIN d 24 – 25	
LONEA 14	PIN T 37	
LONEA SD 15	PIN W dim 43	

Collection

	page
Chandeliers:	6 – 11
Floorlamps:	12 – 19
Arc floor lamps:	20
Floor reading lamps:	21 – 31
Table lamps:	32 – 42
Wall sconces:	43 – 51
Ceiling lamps:	52 – 59
Adjustable pendant lamps:	60 – 67
Pendant lamps:	68 – 73
Spots:	74 – 75

Prices for non-standard finishes

In addition to the metal finishes quoted in this price list, special finishes are available for most models.

Surcharges are calculated from the basic price for brass (– Ms) or nickel (–Ni): *

Mp	Solid brass polished, unlacquered	+ 10%
Ni-lack	Solid brass nickel-plated, lacquered	+ 10%


delivery times on request

* Prices can vary depending on model and technical feasibility.

Note:

The special surfaces „Mp – Solid brass polished, unlacquered“ and „Ni-lack – Solid brass, nickel-plated, lacquered“ visually look the same, such as „Ms – Solid brass polished, lacquered“ and „Ni – Solid brass, nickel-plated“.

Finishes

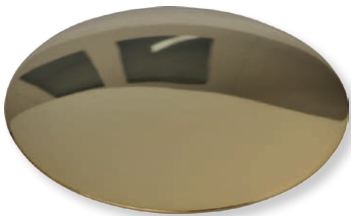

Ms
Solid brass polished, lacquered




Mt
Solid brass matt brushed, lacquered




Ni
Solid brass, nickel-plated



Nm
Solid brass nickel-plated, matt brushed

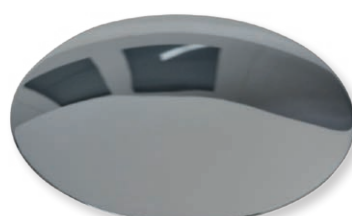

Cr
Solid brass, chrome-plated

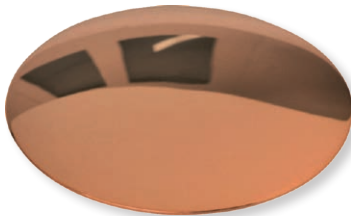

Cu
Solid brass copper-plated, lacquered




Cm
Solid brass copper-plated, matt brushed, lacquered



Br
Solid brass bronzed, lacquered



Bd
Solid brass dark-bronzed, lacquered

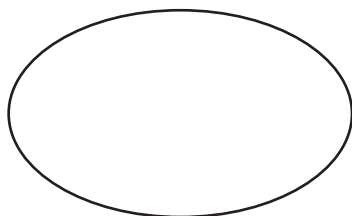

On request
according to RAL card.



ONE 58

LED chandelier

height: adjustable 0.5 to 2 m (16.69" to 78.74") (standard)*
 Ø Ring: 58 cm (22.8")
 Ø canopy: 25 cm (9.8")
 bulb: LED (31,4 Watt) with glare protection incl.
 light upwards and downwards
 approx. 3.020 Lumen
 color temperature: warmwhite 2700 K
 color rendering: > 95 Ra
 dimmer: possible via house installation or Casambi**

ONE 58 – Ms Solid brass polished, lacquered
 ONE 58 – Mt Solid brass matt brushed, lacquered
 ONE 58 – Ni Solid brass, nickel-plated
 ONE 58 – Nm Solid brass nickel-plated, matt brushed
 ONE 58 – Cr Solid brass, chrome-plated
 ONE 58 – Cu Solid brass copper-plated, lacquered
 ONE 58 – Cm Solid brass copper-plated, matt brushed, lacquered
 ONE 58 – Br Solid brass bronzed, lacquered
 ONE 58 – Bd Solid brass dark-bronzed, lacquered

Energy class: A++ to A.

110 Volt/USA: not dimmable



4" junction box: covered

Additional USA 110 V conversion kit: available on request

* Other heights: available on request

** We recommend (without obligation) the following dimmer brands:

- Jung 1731DD
- Feller 40300.RC
- Arditi 027505
- Casambi Dimmer 800598 / 800680
- Kopp 8033

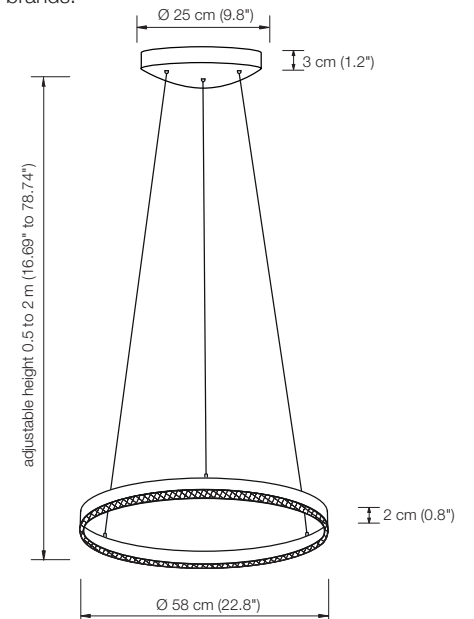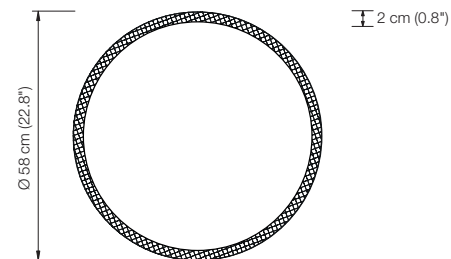

ONE 80

LED chandelier

height: adjustable 0.5 to 2 m (16.69" to 78.74") (standard)*
 Ø Ring: 80 cm (31.5")
 Ø canopy: 25 cm (9.8")
 bulb: LED (43 Watt) with glare protection incl.
 light upwards and downwards
 approx. 4.200 Lumen
 color temperature: warmwhite 2700 K
 color rendering: > 95 Ra
 dimmer: possible via house installation or Casambi**

ONE 80 – Ms Solid brass polished, lacquered
 ONE 80 – Mt Solid brass matt brushed, lacquered
 ONE 80 – Ni Solid brass, nickel-plated
 ONE 80 – Nm Solid brass nickel-plated, matt brushed
 ONE 80 – Cr Solid brass, chrome-plated
 ONE 80 – Cu Solid brass copper-plated, lacquered
 ONE 80 – Cm Solid brass copper-plated, matt brushed, lacquered
 ONE 80 – Br Solid brass bronzed, lacquered
 ONE 80 – Bd Solid brass dark-bronzed, lacquered

Energy class: A++ to A.

110 Volt/USA: not dimmable


4" junction box: covered

Additional USA 110 V conversion kit: available on request

* Other heights: available on request

** We recommend (without obligation) the following dimmer brands:

- Jung 1731DD
- Feller 40300.RC
- Ardit 027505
- Casambi Dimmer 800598 / 800680
- Kopp 8033

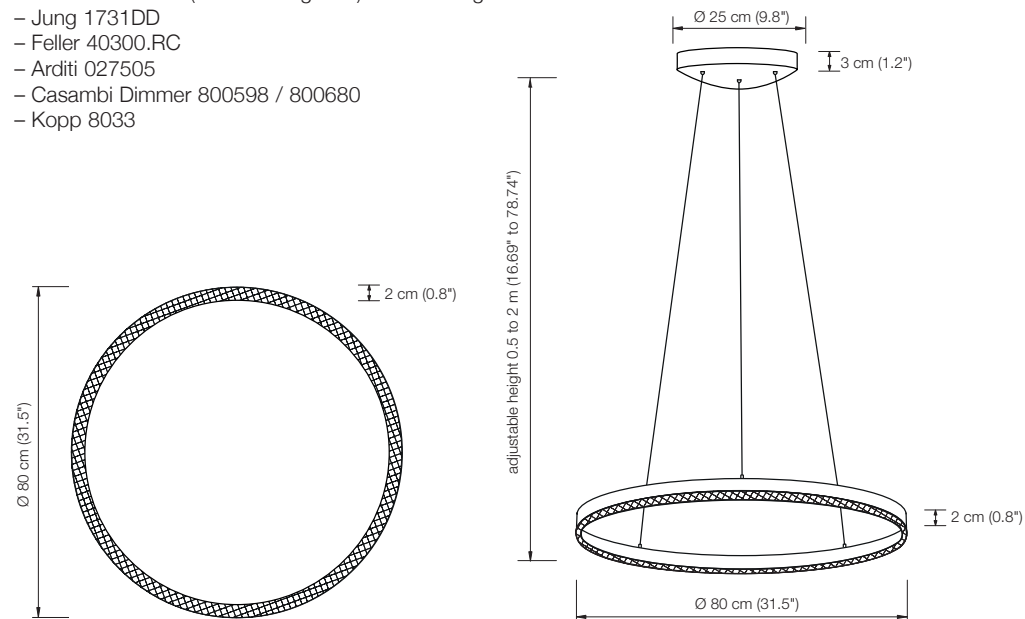



OVA

LED chandelier

height: adjustable 1.5 to 2 m (59.06" to 78.74") (standard)*
 oval shade: 125 cm long, 47 wide, 4 cm high
 (49.2" long, 18.5" wide, 1.6" high)
 canopy: 47 cm long, 14 cm wide, 5 cm high
 (18.5" long, 5.5" wide, 2" high)
 illuminant: LED with glare protection incl.
 light upwards and downwards
 approx. 4800 Lumen**
 color temperature: warmwhite 2700 K***
 color rendering: > 95 Ra
 dimmer: possible via house installation or Casambi****

OVA – Ms	Solid brass polished, lacquered
OVA – Mt	Solid brass matt brushed, lacquered
OVA – Ni	Solid brass, nickel-plated
OVA – Nm	Solid brass nickel-plated, matt brushed
OVA – Cr	Solid brass, chrome-plated
OVA – Cu	Solid brass copper-plated, lacquered
OVA – Cm	Solid brass copper-plated, matt brushed, lacquered
OVA – Br	Solid brass bronzed, lacquered
OVA – Bd	Solid brass dark-bronzed, lacquered

Energy class: A++ to A.

110 Volt/USA: not dimmable

4" junction box: covered

Additional USA 110 V conversion kit: available on request



* Other heights possible, each with a range of 50 cm (19.7").

** higher lumens on request

*** 3000K + 4000K on request

**** We recommend (without obligation) the following dimmer brands:

- Jung 1731DD
- Feller 40300.RC
- Ardit 027505
- Casambi Dimmer 800598 / 800680
- Kopp 8033

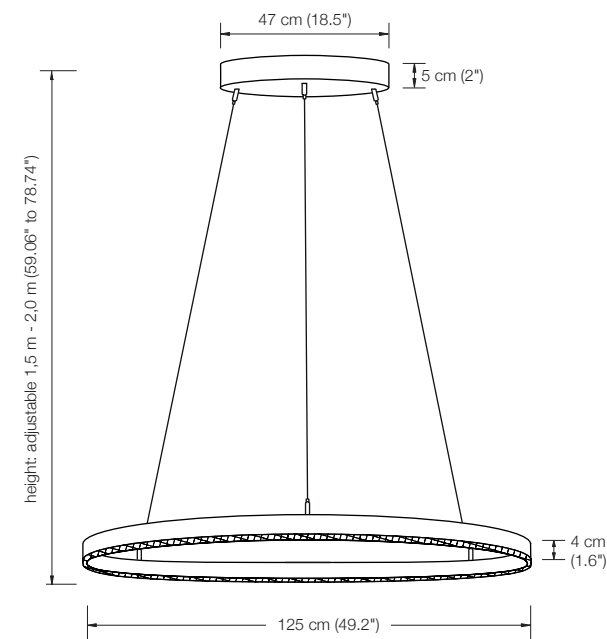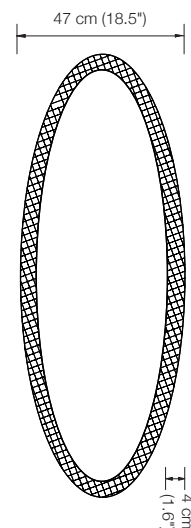



MESA 18

chandelier

18 removable metal arms

total height: min. 85 cm (33.5") - max. 305 cm (120.1") *
 Ø: 88 cm (34.6")
 lampholder: 18 x G4, max. 18 x 20 W / 12 V
 bulb: 18 x G4 incl., dimmable
 dimmer: brightness control is possible **

MESA 18 – Ms	Solid brass polished, lacquered
MESA 18 – Mt	Solid brass matt brushed, lacquered
MESA 18 – Ni	Solid brass, nickel-plated
MESA 18 – Nm	Solid brass nickel-plated, matt brushed
MESA 18 – Cr	Solid brass, chrome-plated
MESA 18 – Cu	Solid brass copper-plated, lacquered
MESA 18 – Cm	Solid brass copper-plated, matt brushed, lacquered
MESA 18 – Br	Solid brass bronzed, lacquered
MESA 18 – Bd	Solid brass dark-bronzed, lacquered

Energy class: C

This model will be sold with a class C bulb.

4" junction box: covered

Additional USA 110 V conversion kit: available on request

* telescopic adjustment:



total height 85 – 125 cm (33.5" – 49.2") (standard)
 total height 115 – 185 cm (45.3" – 72.8")
 total height 175 – 305 cm (68.9" – 120.1")

Other options available on request.

Please indicate with order.

** These lamps are equipped with 2 electronic transformers of 210 VA capacity each.

LED version on request.

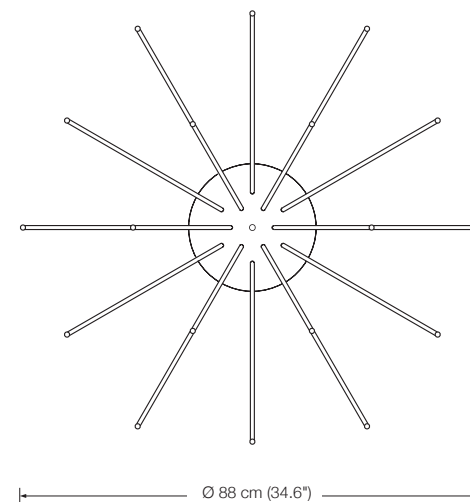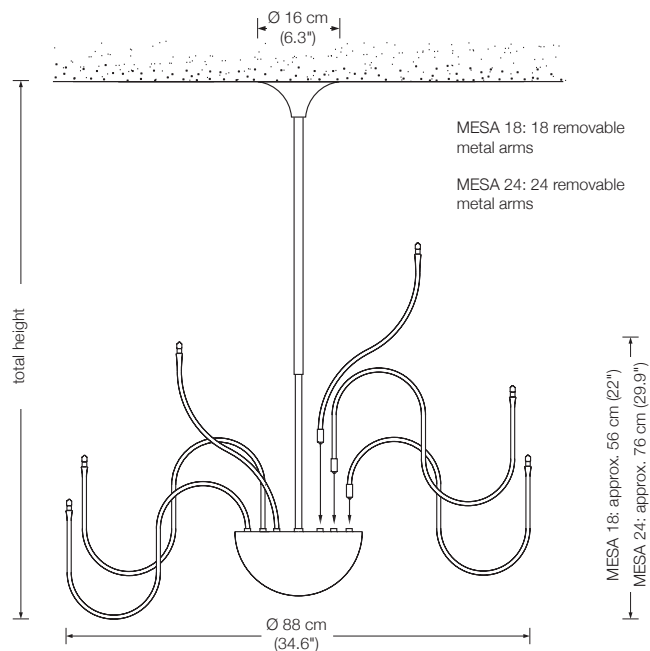

MESA 24

chandelier

24 removable metal arms

total height: min. 95 (37.4") - max. 315 cm (53.1") *
 Ø: 140 cm (55.1")
 lampholder: 24 x G4, max. 24 x 20 W / 12 V
 bulb: 24 x G4 incl., dimmable
 dimmer: brightness control is possible **

MESA 24 – Ms	Solid brass polished, lacquered
MESA 24 – Mt	Solid brass matt brushed, lacquered
MESA 24 – Ni	Solid brass, nickel-plated
MESA 24 – Nm	Solid brass nickel-plated, matt brushed
MESA 24 – Cr	Solid brass, chrome-plated
MESA 24 – Cu	Solid brass copper-plated, lacquered
MESA 24 – Cm	Solid brass copper-plated, matt brushed, lacquered
MESA 24 – Br	Solid brass bronzed, lacquered
MESA 24 – Bd	Solid brass dark-bronzed, lacquered

Energy class: C

This model will be sold with a class C bulb.

4" junction box: covered

Additional USA 110 V conversion kit: available on request

* telescopic adjustment:

total height 95 – 135 cm (37.4" – 53.1") (standard)

total height 125 – 195 cm (49.2" – 76.8")


total height 185 – 315 cm (72.8" – 124")

Other options available on request.

Please indicate with order.

** These lamps are equipped with 3 electronic transformers of 210 VA capacity each.

LED version on request.

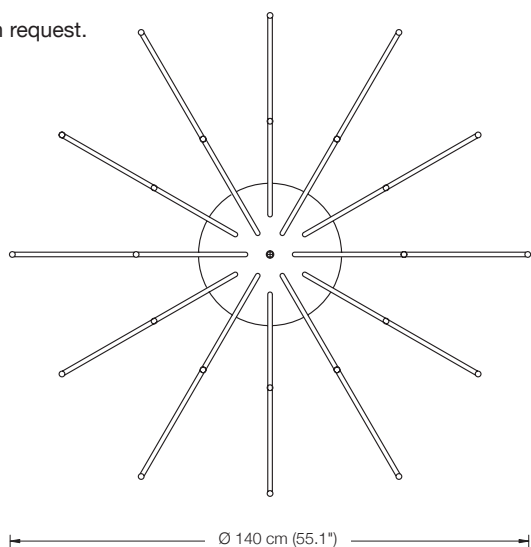



VAYO

floor lamp / reading lamp


height:	180 cm (70.9")
width reading lamp:	approx. 50 cm (19.7")
shade floor lamp:	glass white-opal, Ø 23 cm (9.1")
shade reading lamp:	TEFLON white Ø 7 cm (2.8")
lampholder floor lamp:	E26, max. 250 W / 230 V
lampholder reading lamp:	GY6.35, max. 50 W / 12 V
bulb reading lamp:	1 x G6 incl., dimmable
electric wire:	4 m (13.1 ft)
dimmer:	2 x built in

VAYO – Ms	Solid brass polished, lacquered
VAYO – Mt	Solid brass matt brushed, lacquered
VAYO – Ni	Solid brass, nickel-plated
VAYO – Nm	Solid brass nickel-plated, matt brushed
VAYO – Cr	Solid brass, chrome-plated
VAYO – Cu	Solid brass copper-plated, lacquered
VAYO – Cm	Solid brass copper-plated, matt brushed, lacquered
VAYO – Br	Solid brass bronzed, lacquered
VAYO – Bd	Solid brass dark-bronzed, lacquered
Optional: glass tabletop	
Ø 36 cm (14.2"), height 50 cm (19.7"), clear glass 10 mm (0.4")	

Energy class floor lamp: A++ to E
(Depending on the used bulb.)

Energy class reading lamp: B
This model will be sold with a class B bulb.

Additional USA 110 V conversion kit: available on request
floor lamp 110 V bulbs are not included

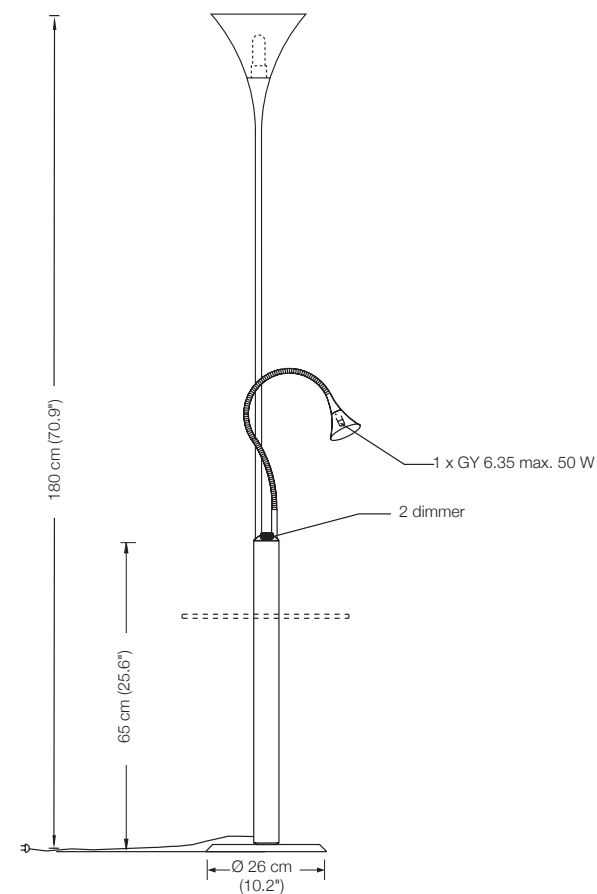

OKON

floor lamp


height: 183 cm (72")
shade: metal Ø 40 cm (15.7") bottom glass diffuser
lampholder: R7s, max. 500 W
bulb: 1 x R7s incl., dimmable
electric wire: 5 m (16.4 ft)
dimmer: built in


OKON – Ms Solid brass polished, lacquered
OKON – Mt Solid brass matt brushed, lacquered
OKON – Ni Solid brass, nickel-plated
OKON – Nm Solid brass nickel-plated, matt brushed
OKON – Cr Solid brass, chrome-plated
OKON – Cu Solid brass copper-plated, lacquered
OKON – Cm Solid brass copper-plated, matt brushed, lacquered
OKON – Br Solid brass bronzed, lacquered
OKON – Bd Solid brass dark-bronzed, lacquered

Energy class: D

This model will be sold with a class D bulb.

Additional USA 110 V conversion kit: available on request
110 V bulbs are not included

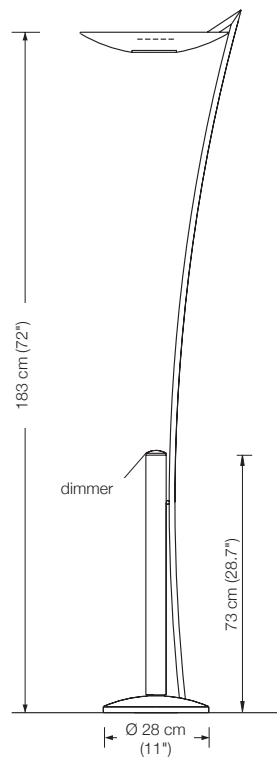

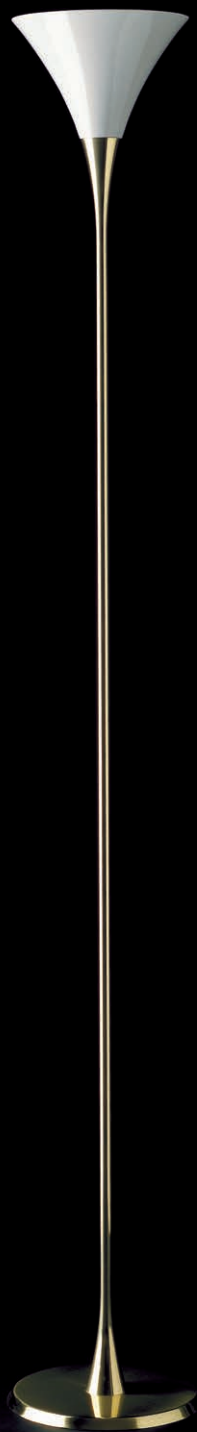

LONEA


floor lamp

height: 180 cm (70.9")
 shade: glass white-opal, Ø 23 cm (9.1")
 lampholder: E26, max. 250 W
 electric wire: 3 m (9.8 ft)
 dimmer: on cord

LONEA – Ms	Solid brass polished, lacquered
LONEA – Mt	Solid brass matt brushed, lacquered
LONEA – Ni	Solid brass, nickel-plated
LONEA – Nm	Solid brass nickel-plated, matt brushed
LONEA – Cr	Solid brass, chrome-plated
LONEA – Cu	Solid brass copper-plated, lacquered
LONEA – Cm	Solid brass copper-plated, matt brushed, lacquered
LONEA – Br	Solid brass bronzed, lacquered
LONEA – Bd	Solid brass dark-bronzed, lacquered

Energy class: A++ to E
 (Depending on the used bulb.)

Additional USA 110 V conversion kit: available on request
 110 V bulbs are not included

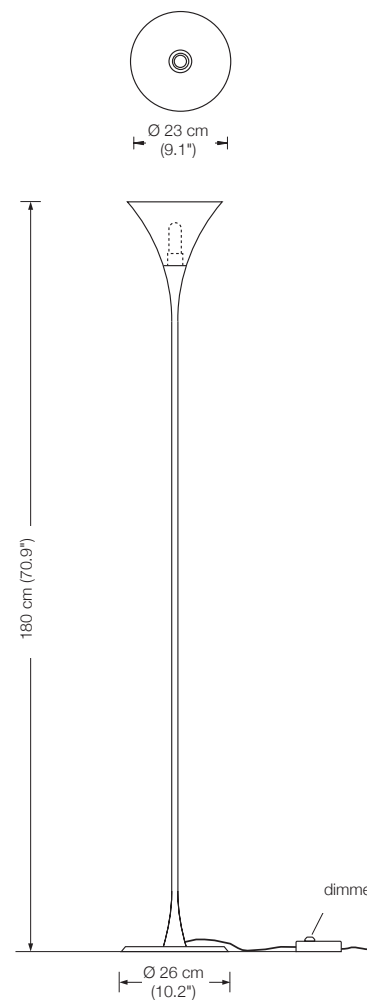

LONEA SD


floor lamp

height: 160 - 190 cm (63"- 74.8") adjustable
 shade: glass white-opal, Ø 23 cm (9.1")
 lampholder: E26, max. 250 W
 electric wire: 3 m (9.8 ft)
 dimmer: built in

LONEA SD – Ms Solid brass polished, lacquered
 LONEA SD – Mt Solid brass matt brushed, lacquered
 LONEA SD – Ni Solid brass, nickel-plated
 LONEA SD – Nm Solid brass nickel-plated, matt brushed
 LONEA SD – Cr Solid brass, chrome-plated
 LONEA SD – Cu Solid brass copper-plated, lacquered
 LONEA SD – Cm Solid brass copper-plated, matt brushed, lacquered
 LONEA SD – Br Solid brass bronzed, lacquered
 LONEA SD – Bd Solid brass dark-bronzed, lacquered

Energy class: A++ to E
 (Depending on the used bulb.)

Additional USA 110 V conversion kit: available on request
 110 V bulbs are not included

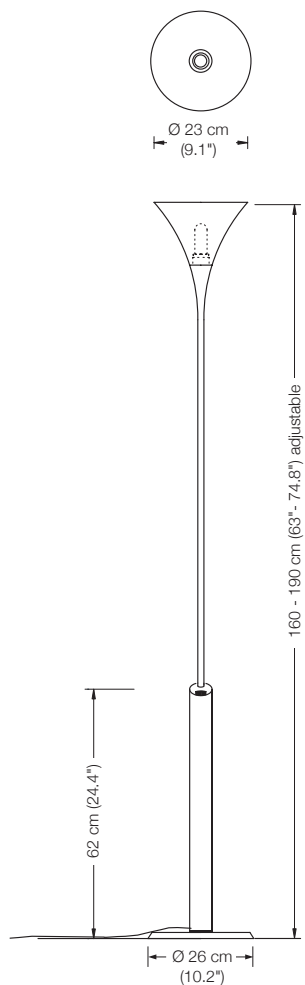



MYOS

floor lamp / floor reading lamp


height:	182 cm (71.7")
width reading lamp:	approx. 50 cm (19.7")
shade floor lamp:	glass white-opal, Ø 26 cm (10.2")
shade reading lamp:	metal Ø 12 cm (4.7"), adjustable
lampholder floor lamp:	E26, max. 250 W / 230 V
lampholder reading lamp:	GY6.35, max. 50 W / 12 V
bulb reading lamp:	1 x G6 incl., 35 W $\triangle$ 50 W, dimmable
electric wire:	4 m (13.1 ft)
dimmer:	2 x built in

MYOS – Ms	Solid brass polished, lacquered
MYOS – Mt	Solid brass matt brushed, lacquered
MYOS – Ni	Solid brass, nickel-plated
MYOS – Nm	Solid brass nickel-plated, matt brushed
MYOS – Cr	Solid brass, chrome-plated
MYOS – Cu	Solid brass copper-plated, lacquered
MYOS – Cm	Solid brass copper-plated, matt brushed, lacquered
MYOS – Br	Solid brass bronzed, lacquered
MYOS – Bd	Solid brass dark-bronzed, lacquered
Optional: glass tabletop	
Ø 36 cm (14.2"), height 50 cm (19.7"), clear glass 10 mm (0.4")	

Energy class: A++ to E
(Depending on the used bulb.)

Energy class reading lamp: B
This model will be sold with a class B bulb.

Additional USA 110 V conversion kit: available on request
floor lamp 110 V bulbs are not included

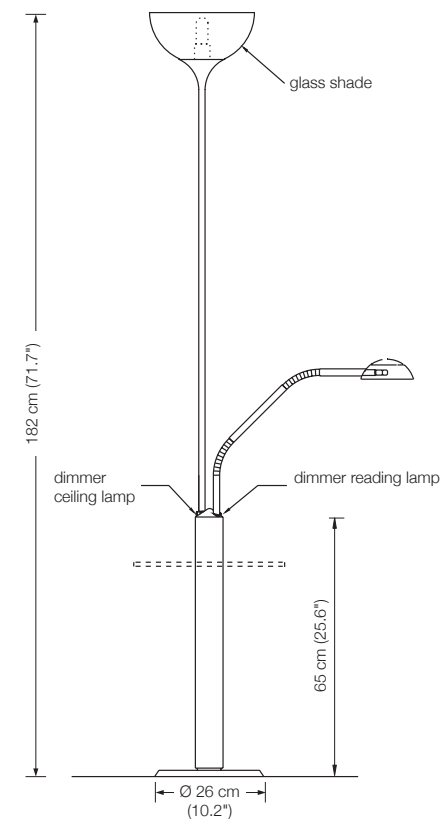

MYOS T

floor lamp / floor reading lamp

height:	182 cm (71.7")
width reading lamp:	approx. 50 cm (19.7")
shade reading lamp:	metal Ø 12 cm (4.7"), adjustable
lampholder floor lamp:	E26, max. 250 W / 230 V
lampholder reading lamp:	GY6.35, max. 50 W / 12 V
bulb reading lamp:	1 x G6 incl., 35 W $\triangleq$ 50 W, dimmable
electric wire:	4 m (13.1 ft)
dimmer:	2 x built in

MYOS T 40

shade floor lamp: glass white-opal, Ø 40 cm (15.7")

MYOS T 40 – Ms	Solid brass polished, lacquered
MYOS T 40 – Mt	Solid brass matt brushed, lacquered
MYOS T 40 – Ni	Solid brass, nickel-plated
MYOS T 40 – Nm	Solid brass nickel-plated, matt brushed
MYOS T 40 – Cr	Solid brass, chrome-plated
MYOS T 40 – Cu	Solid brass copper-plated, lacquered
MYOS T 40 – Cm	Solid brass copper-plated, matt brushed, lacquered
MYOS T 40 – Br	Solid brass bronzed, lacquered
MYOS T 40 – Bd	Solid brass dark-bronzed, lacquered
Optional: glass tabletop	
Ø 36 cm (14.2"), height 50 cm (19.7"), clear glass 10 mm (0.4")	


MYOS T 55

shade floor lamp: glass white-opal, Ø 55 cm (21.7")

MYOS T 55 – Ms	Solid brass polished, lacquered
MYOS T 55 – Mt	Solid brass matt brushed, lacquered
MYOS T 55 – Ni	Solid brass, nickel-plated
MYOS T 55 – Nm	Solid brass nickel-plated, matt brushed
MYOS T 55 – Cr	Solid brass, chrome-plated
MYOS T 55 – Cu	Solid brass copper-plated, lacquered
MYOS T 55 – Cm	Solid brass copper-plated, matt brushed, lacquered
MYOS T 55 – Br	Solid brass bronzed, lacquered
MYOS T 55 – Bd	Solid brass dark-bronzed, lacquered
Optional: glass tabletop	
Ø 36 cm (14.2"), height 50 cm (19.7"), clear glass 10 mm (0.4")	

Energy class floor lamp MYOS T 40 / 55: A++ to E
(Depending on the used bulb.)

Energy class reading lamp MYOS T 40 / 55: B
This model will be sold with a class B bulb.

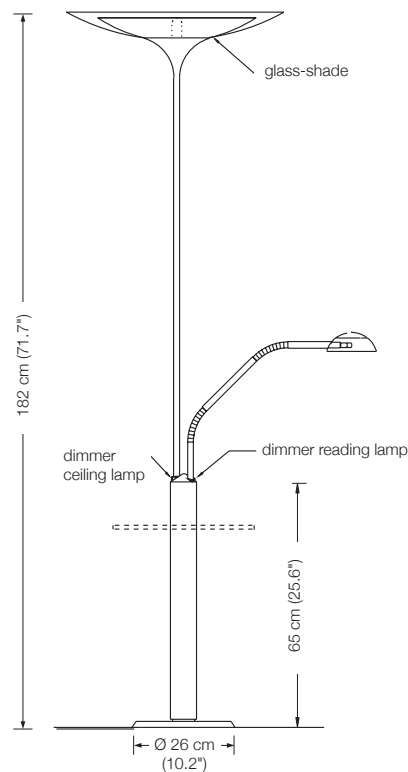

Additional USA 110 V conversion kit
(MYOS T 40 / 55): available on request
floor lamp 110 V bulbs are not included





TAOS floor lamp

height: 160 - 210 cm (63" - 82.7") adjustable
 lampholder: E26, max. 250 W
 electric wire: 3 m (9.8 ft)
 dimmer: on cord

TAOS 55

shade: glass white-opal Ø 55 cm (21.7")

TAOS 55 – Ms Solid brass polished, lacquered
 TAOS 55 – Mt Solid brass matt brushed, lacquered
 TAOS 55 – Ni Solid brass, nickel-plated
 TAOS 55 – Nm Solid brass nickel-plated, matt brushed
 TAOS 55 – Cr Solid brass, chrome-plated
 TAOS 55 – Cu Solid brass copper-plated, lacquered
 TAOS 55 – Cm Solid brass copper-plated, matt brushed, lacquered
 TAOS 55 – Br Solid brass bronzed, lacquered
 TAOS 55 – Bd Solid brass dark-bronzed, lacquered


TAOS 40

shade: glass white-opal Ø 40 cm (15.7")

TAOS 40 – Ms Solid brass polished, lacquered
 TAOS 40 – Mt Solid brass matt brushed, lacquered
 TAOS 40 – Ni Solid brass, nickel-plated
 TAOS 40 – Nm Solid brass nickel-plated, matt brushed
 TAOS 40 – Cr Solid brass, chrome-plated
 TAOS 40 – Cu Solid brass copper-plated, lacquered
 TAOS 40 – Cm Solid brass copper-plated, matt brushed, lacquered
 TAOS 40 – Br Solid brass bronzed, lacquered
 TAOS 40 – Bd Solid brass dark-bronzed, lacquered

Energy class TAOS 55 / 40: A++ to E
 (Depending on the used bulb.)

Additional USA 110 V conversion kit
 (TAOS 55 / 40): available on request
 110 V bulbs are not included

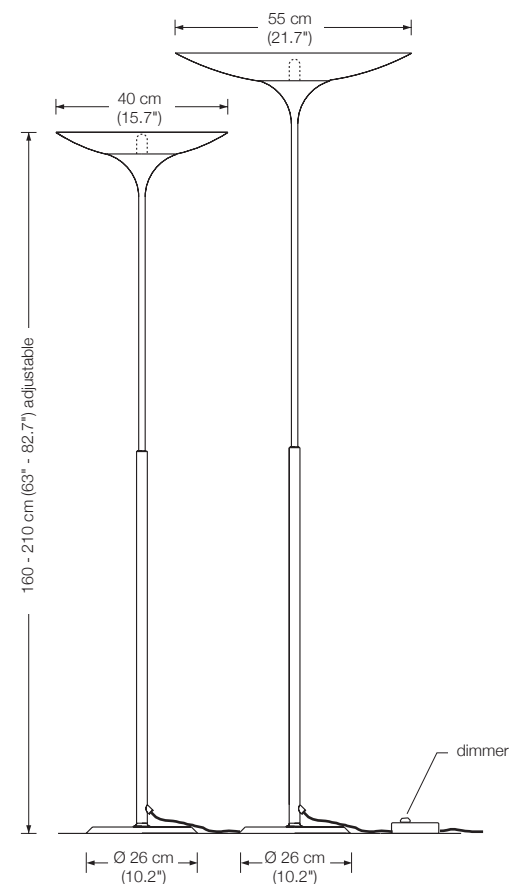

TAOS SD

floor lamp

height: 160 - 190 cm (63" - 74.8") adjustable
lampholder: E26, max. 250 W
electric wire: 3 m (9.8 ft)
dimmer: built in

TAOS 55 SD

shade: glass white-opal Ø 55 cm (21.7")

TAOS 55 SD – Ms Solid brass polished, lacquered
TAOS 55 SD – Mt Solid brass matt brushed, lacquered
TAOS 55 SD – Ni Solid brass, nickel-plated
TAOS 55 SD – Nm Solid brass nickel-plated, matt brushed
TAOS 55 SD – Cr Solid brass, chrome-plated
TAOS 55 SD – Cu Solid brass copper-plated, lacquered
TAOS 55 SD – Cm Solid brass copper-plated, matt brushed, lacquered
TAOS 55 SD – Br Solid brass bronzed, lacquered
TAOS 55 SD – Bd Solid brass dark-bronzed, lacquered



TAOS 40 SD

shade: glass white-opal Ø 40 cm (15.7")

TAOS 40 SD – Ms Solid brass polished, lacquered
TAOS 40 SD – Mt Solid brass matt brushed, lacquered
TAOS 40 SD – Ni Solid brass, nickel-plated
TAOS 40 SD – Nm Solid brass nickel-plated, matt brushed
TAOS 40 SD – Cr Solid brass, chrome-plated
TAOS 40 SD – Cu Solid brass copper-plated, lacquered
TAOS 40 SD – Cm Solid brass copper-plated, matt brushed, lacquered
TAOS 40 SD – Br Solid brass bronzed, lacquered
TAOS 40 SD – Bd Solid brass dark-bronzed, lacquered

Energy class TAOS 55 SD / 40 SD: A++ to E
(Depending on the used bulb.)

Additional USA 110 V conversion kit
(TAOS 55 SD / 40 SD): available on request
110 V bulbs are not included

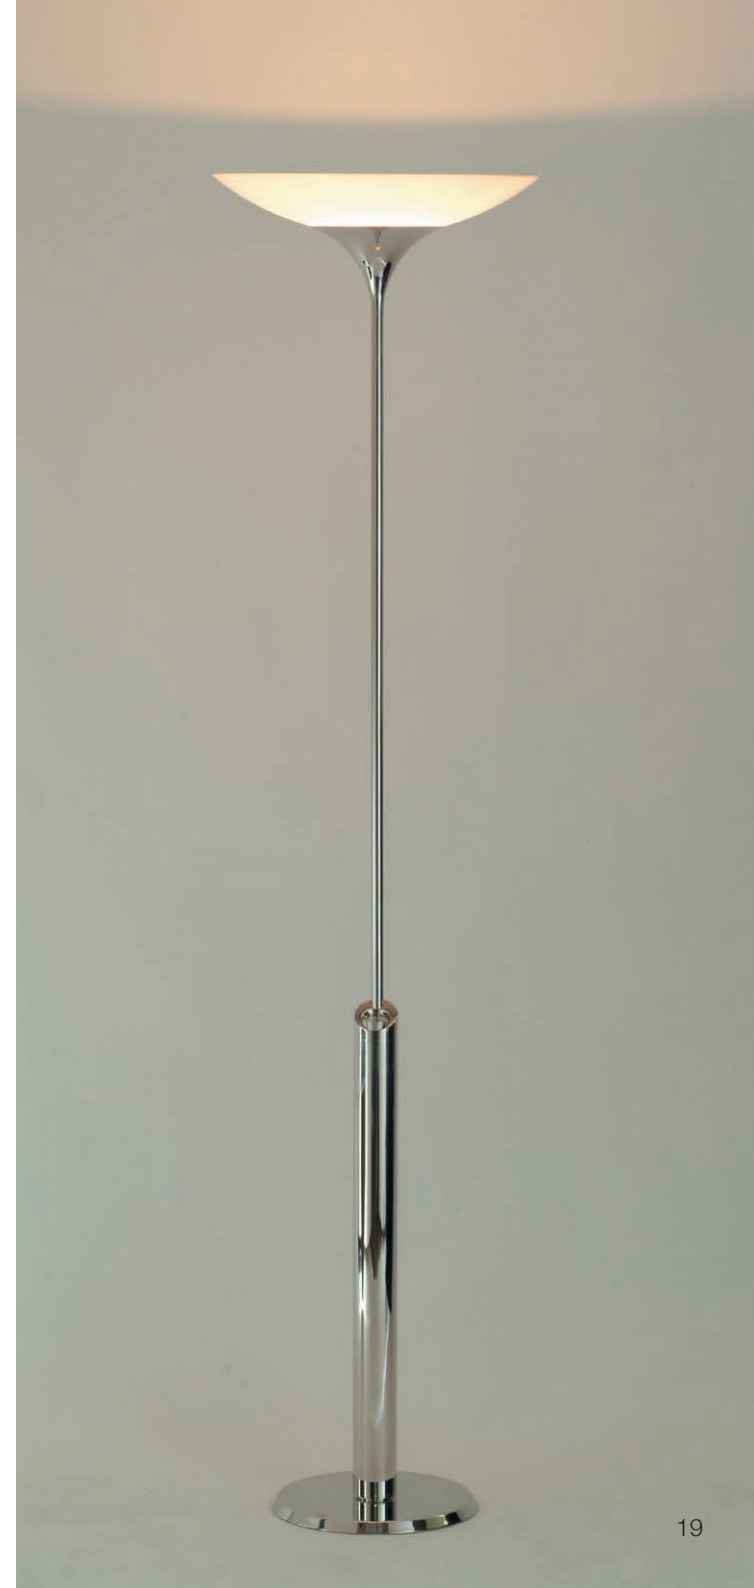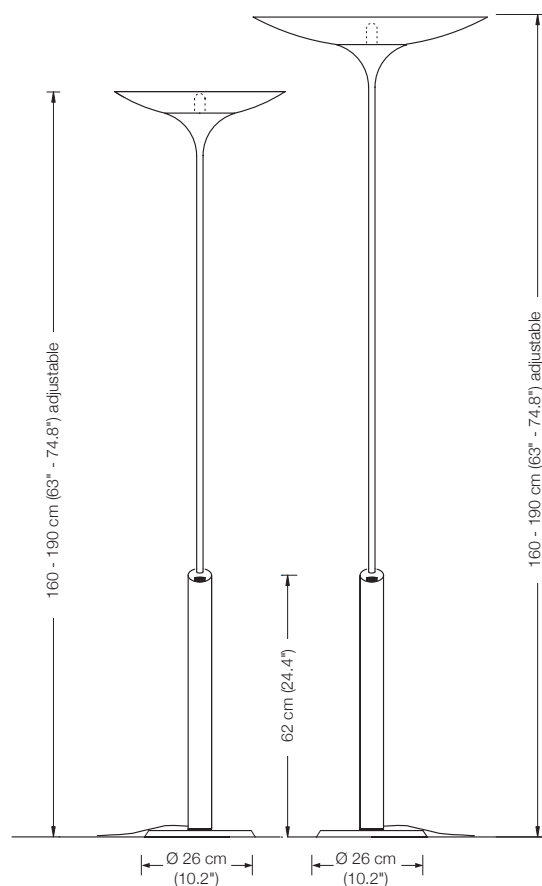



UNA

arc floor lamp

mounting between floor and ceiling

variable up to 3.20 m (10,5 ft) room height

arc height adjustable


shade: metal, Ø 17 cm (6.7"), rotatable
 lampholder: B15d, max. 250 W
 bulb: 1 x B15d incl., dimmable
 electric wire: 5 m (16.4 ft)
 dimmer: built in

UNA – Ms Solid brass polished, lacquered
 UNA – Mt Solid brass matt brushed, lacquered
 UNA – Ni Solid brass, nickel-plated
 UNA – Nm Solid brass nickel-plated, matt brushed
 UNA – Cr Solid brass, chrome-plated
 UNA – Cu Solid brass copper-plated, lacquered
 UNA – Cm Solid brass copper-plated, matt brushed, lacquered
 UNA – Br Solid brass bronzed, lacquered
 UNA – Bd Solid brass dark-bronzed, lacquered

Energy class: D

This model will be sold with a class D bulb.

Additional USA 110 V conversion kit:
 available on request

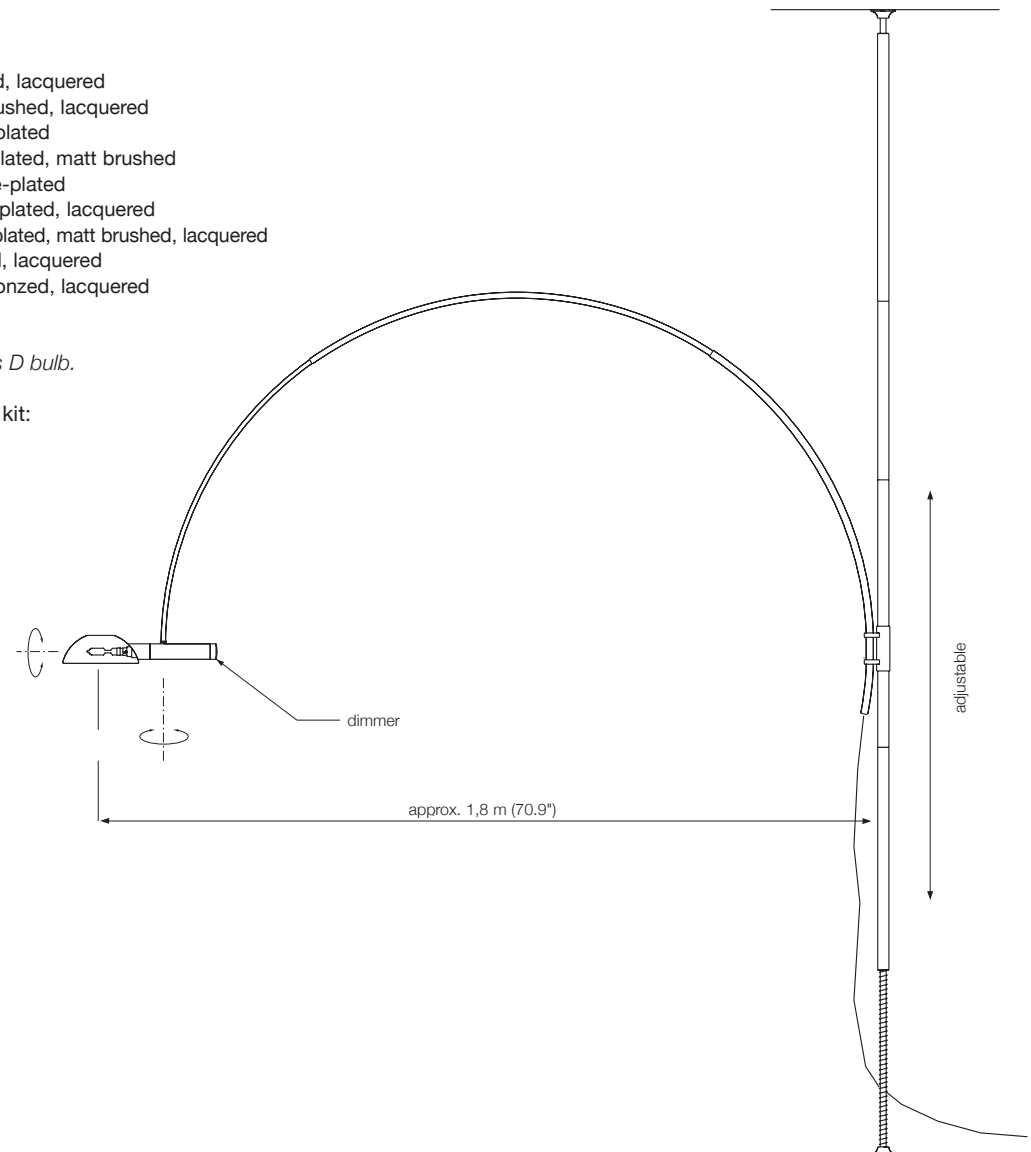

CERVANTES

floor reading lamp

height: 80 - 120 cm (31.5" - 47.2") adjustable
 shade: 80 - 120 cm (31.5" - 47.2") adjustable
 lampholder: E26, max. 100 W
 electric wire: 4 m (13.1 ft)
 dimmer: on cord



CERVANTES – Ms Solid brass polished, lacquered
 CERVANTES – Mt Solid brass matt brushed, lacquered
 CERVANTES – Ni Solid brass, nickel-plated
 CERVANTES – Nm Solid brass nickel-plated, matt brushed
 CERVANTES – Cr Solid brass, chrome-plated
 CERVANTES – Cu Solid brass copper-plated, lacquered
 CERVANTES – Cm Solid brass copper-plated, matt brushed, lacquered
 CERVANTES – Br Solid brass bronzed, lacquered
 CERVANTES – Bd Solid brass dark-bronzed, lacquered


Energy class: A++ to E

(Depending on the used bulb.)

Additional USA 110 V conversion kit: available on request

110 V bulbs not included

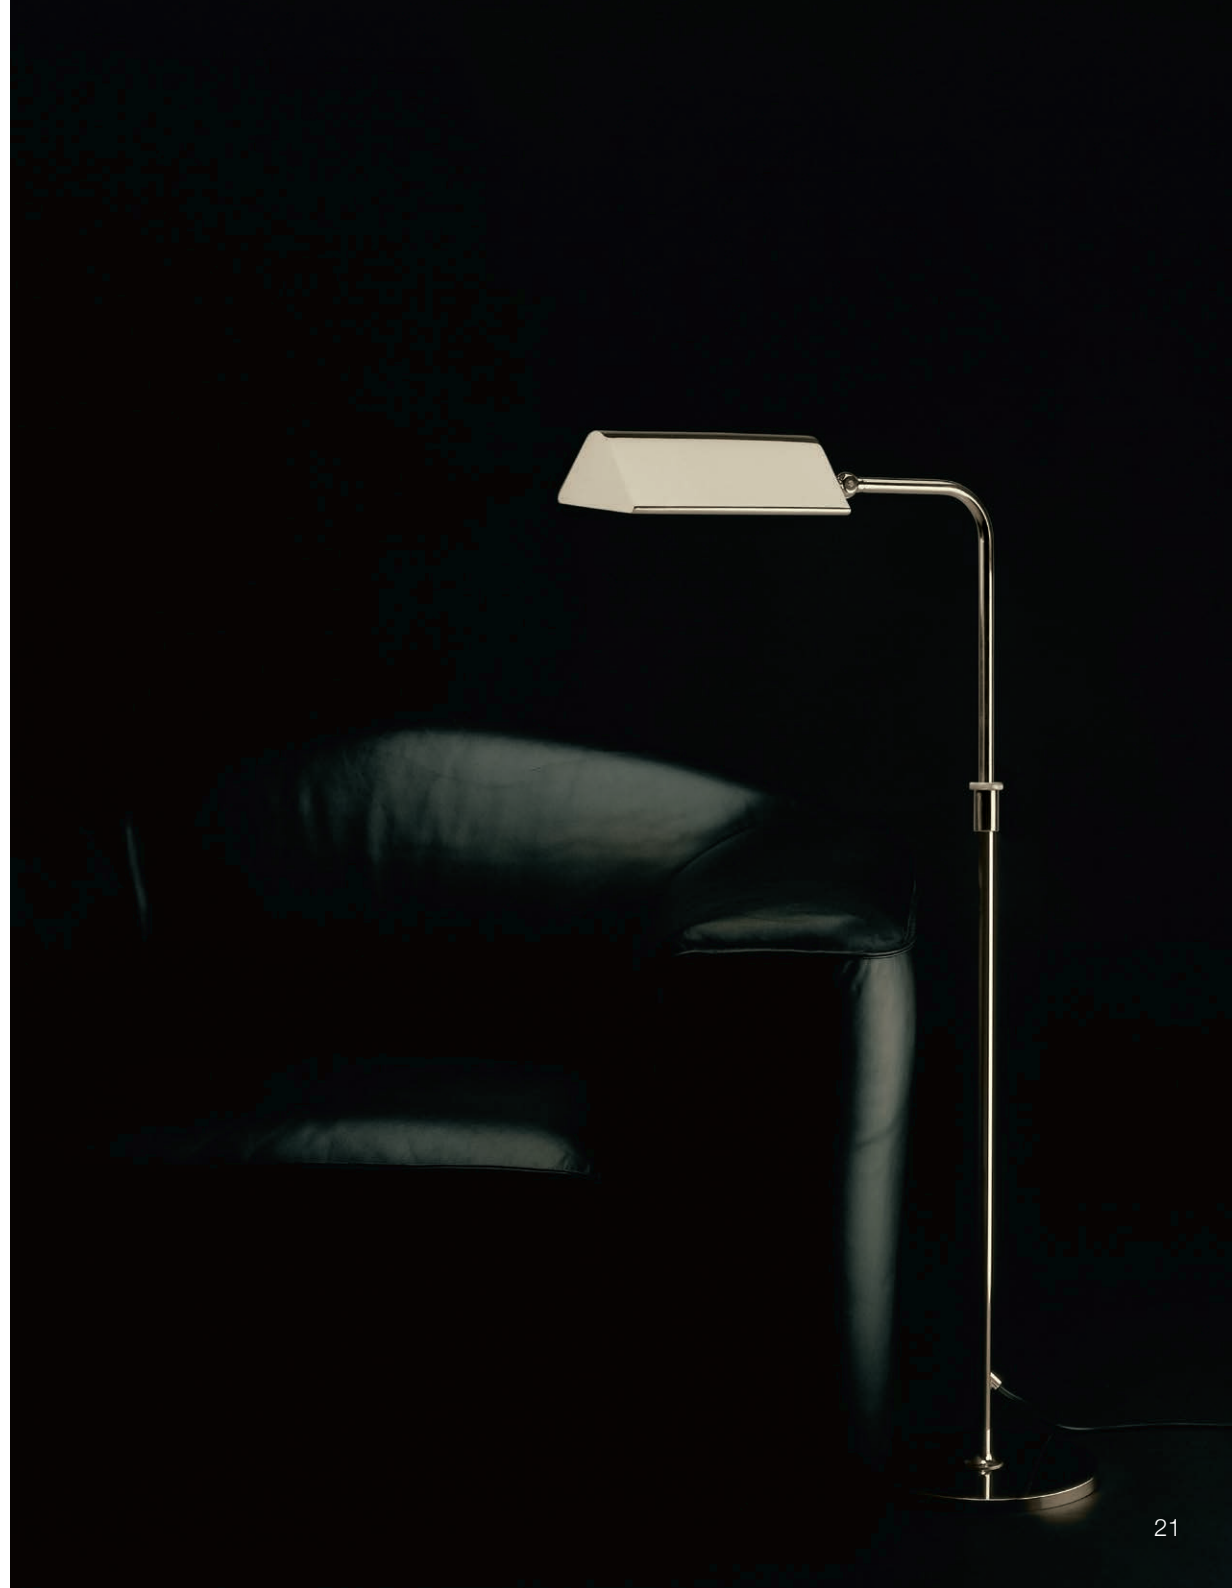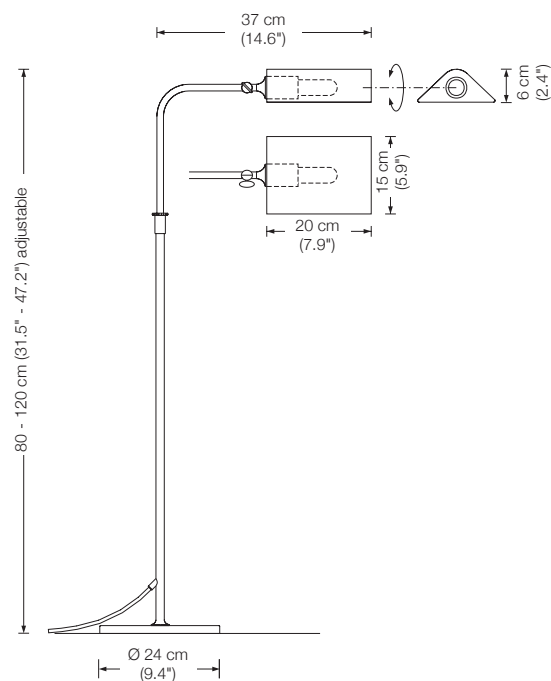

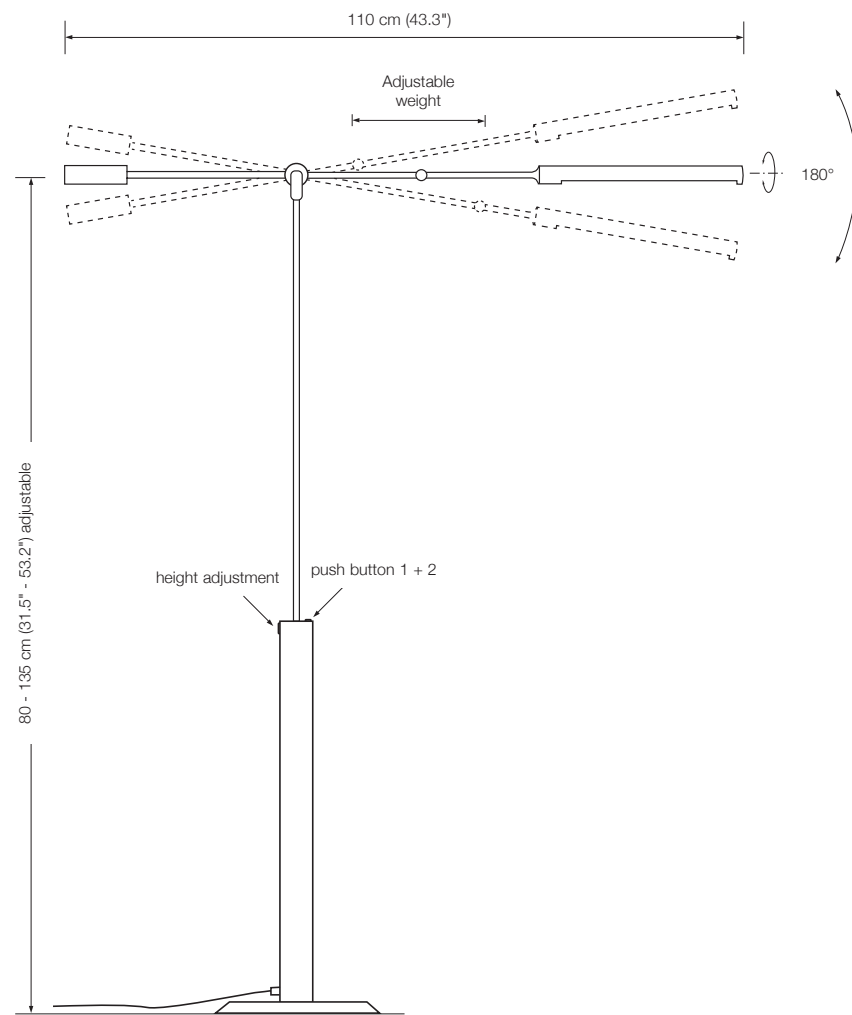

DROP

floor reading lamp / piano light

height:	adjustable from 80 – 135 cm (31.5" – 53.1")
width:	70 cm (27.6")
shade:	Ø 3 cm (1.2"), approx. 34 cm (13.4") long, 180° rotatable
bulb:	LED-Line TW (approx. 18,6 W) incl., exchangeable approx. 1800 Lumen, dimmable
push button 1:	tuning white infinitely variable from 2700° – 5700° K
push button 2:	on / off / dimming
color rendering:	> 95 Ra
electric wire:	2 m (6.6 ft)
dimmer:	built in

DROP – Ms	Solid brass polished, lacquered
DROP – Mt	Solid brass matt brushed, lacquered
DROP – Ni	Solid brass, nickel-plated
DROP – Nm	Solid brass nickel-plated, matt brushed
DROP – Cr	Solid brass, chrome-plated
DROP – Cu	Solid brass copper-plated, lacquered
DROP – Cm	Solid brass copper-plated, matt brushed, lacquered
DROP – Br	Solid brass bronzed, lacquered
DROP – Bd	Solid brass dark-bronzed, lacquered

Energy class: A++ to A

US Plug Adapter: available on request





PIN

floor reading lamp

height: 100 - 135 cm (39.4" - 53.2") adjustable
width: approx. 52 cm (20.5")
bulb: 1 x LED 150 (approx. 6,4 Watt) incl.
exchangeable
approx. 650 Lumen
color temperature: warmwhite 2700 K
color rendering: > 90 Ra
electric wire: 3 m (9.8 ft)

PIN – Ms Solid brass polished, lacquered
PIN – Mt Solid brass matt brushed, lacquered
PIN – Ni Solid brass, nickel-plated
PIN – Nm Solid brass nickel-plated, matt brushed
PIN – Cr Solid brass, chrome-plated
PIN – Cu Solid brass copper-plated, lacquered
PIN – Cm Solid brass copper-plated, matt brushed, lacquered
PIN – Br Solid brass bronzed, lacquered
PIN – Bd Solid brass dark-bronzed, lacquered

Energy class: A++ to A

Additional USA 110 V conversion kit: available on request

PIN d

floor reading lamp dimmable


height: 105 - 140 cm (41.3" - 55.1") adjustable
width: approx. 52 cm (20.5")
bulb: 1 x LED 150 (approx. 8,4 Watt) incl.
exchangeable
approx. 840 Lumen
color temperature: warmwhite 2700 K
color rendering: > 90 Ra
electric wire: 3 m (9.8 ft)
dimmer: built in

PIN d – Ms Solid brass polished, lacquered
PIN d – Mt Solid brass matt brushed, lacquered
PIN d – Ni Solid brass, nickel-plated
PIN d – Nm Solid brass nickel-plated, matt brushed
PIN d – Cr Solid brass, chrome-plated
PIN d – Cu Solid brass copper-plated, lacquered
PIN d – Cm Solid brass copper-plated, matt brushed, lacquered
PIN d – Br Solid brass bronzed, lacquered
PIN d – Bd Solid brass dark-bronzed, lacquered

Energy class: A++ to A

US Plug Adapter: available on request



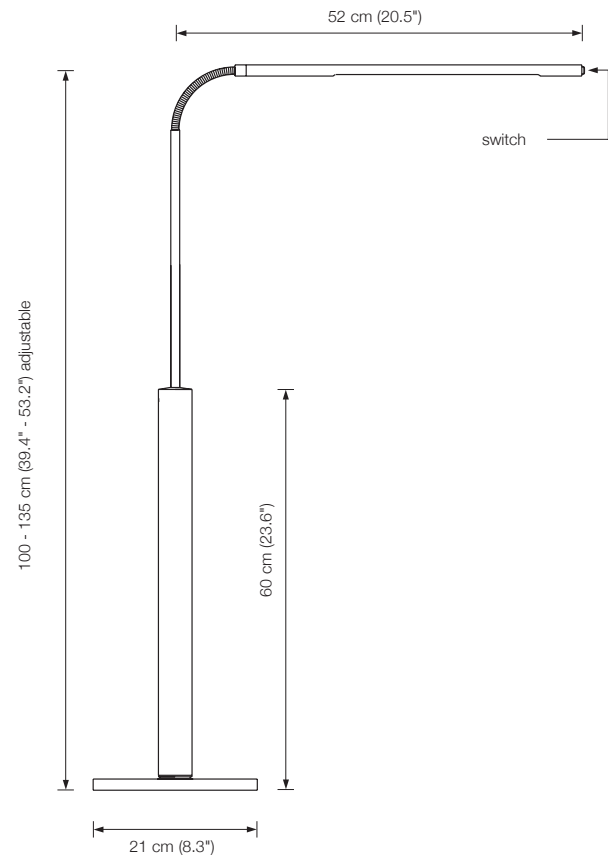



STE

floor reading lamp

height: adjustable
 shade: silk*
 lampholder: E26, max. 150 W
 electric wire: 3 m (9.8 ft) textile cable black (standard)
 dimmer: on cord


STE – Ms	Solid brass polished, lacquered
STE – Mt	Solid brass matt brushed, lacquered
STE – Ni	Solid brass, nickel-plated
STE – Nm	Solid brass nickel-plated, matt brushed
STE – Cr	Solid brass, chrome-plated
STE – Cu	Solid brass copper-plated, lacquered
STE – Cm	Solid brass copper-plated, matt brushed, lacquered
STE – Br	Solid brass bronzed, lacquered
STE – Bd	Solid brass dark-bronzed, lacquered

Energy class: A++ to E
 (Depending on the used bulb.)

Additional USA 110 V conversion kit: available on request
 110 V bulbs not included

* fabric required: 120 x 60 cm (47.2" x 23.6")

Ø 34 cm (13.4")
 h 33 cm (13")
 Ø 35 cm (13.8")

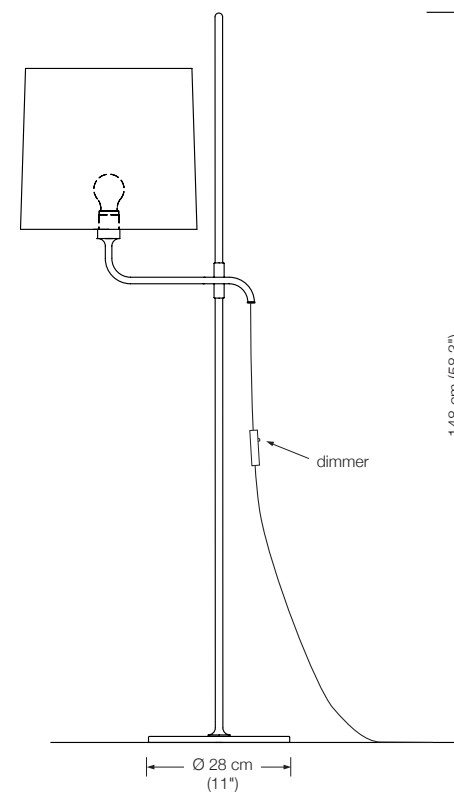



LESAN M

floor reading lamp

height: 90 - 135 cm (35.4" - 53.1") adjustable
 shade: metal Ø 28 cm (11")
 lampholder: E26, max. 100 W
 electric wire: 3 m (9.8 ft)
 dimmer: on cord

LESAN M – Ms	Solid brass polished, lacquered
LESAN M – Mt	Solid brass matt brushed, lacquered
LESAN M – Ni	Solid brass, nickel-plated
LESAN M – Nm	Solid brass nickel-plated, matt brushed
LESAN M – Cr	Solid brass, chrome-plated
LESAN M – Cu	Solid brass copper-plated, lacquered
LESAN M – Cm	Solid brass copper-plated, matt brushed, lacquered
LESAN M – Br	Solid brass bronzed, lacquered
LESAN M – Bd	Solid brass dark-bronzed, lacquered

LESAN S

floor reading lamp


height: 90 - 135 cm (35.4" - 53.1") adjustable
 shade: silk* Ø 28 cm (11")
 lampholder: E26, max. 100 W
 electric wire: 3 m (9.8 ft)
 dimmer: on cord

LESAN S – Ms	Solid brass polished, lacquered
LESAN S – Mt	Solid brass matt brushed, lacquered
LESAN S – Ni	Solid brass, nickel-plated
LESAN S – Nm	Solid brass nickel-plated, matt brushed
LESAN S – Cr	Solid brass, chrome-plated
LESAN S – Cu	Solid brass copper-plated, lacquered
LESAN S – Cm	Solid brass copper-plated, matt brushed, lacquered
LESAN S – Br	Solid brass bronzed, lacquered
LESAN S – Bd	Solid brass dark-bronzed, lacquered

* fabric required: 50 x 80 cm (19.7" x 31.5")

Energy class LESAN M / S: A++ to E
 (Depending on the used bulb.)

Additional USA 110 V conversion kit (LESAN M / S): available on request
 110 V bulbs not included

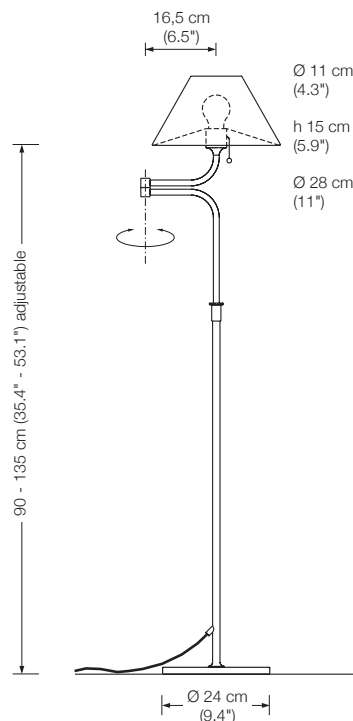



INAS

floor reading lamp

height: 132 - 170 cm (52" - 66.9") adjustable
 shade: silk, conical or straight*
 lampholder: E26, max. 150 W
 electric wire: 4 m (13.1 ft)
 dimmer: on cord


INAS – Ms	Solid brass polished, lacquered
INAS – Mt	Solid brass matt brushed, lacquered
INAS – Ni	Solid brass, nickel-plated
INAS – Nm	Solid brass nickel-plated, matt brushed
INAS – Cr	Solid brass, chrome-plated
INAS – Cu	Solid brass copper-plated, lacquered
INAS – Cm	Solid brass copper-plated, matt brushed, lacquered
INAS – Br	Solid brass bronzed, lacquered
INAS – Bd	Solid brass dark-bronzed, lacquered

Energy class: A++ to E
 (Depending on the used bulb.)

Additional USA 110 V conversion kit: available on request
 110 V bulbs not included

* Please indicate with order.

fabric required: 120 x 60 cm (47.3" x 23.6")

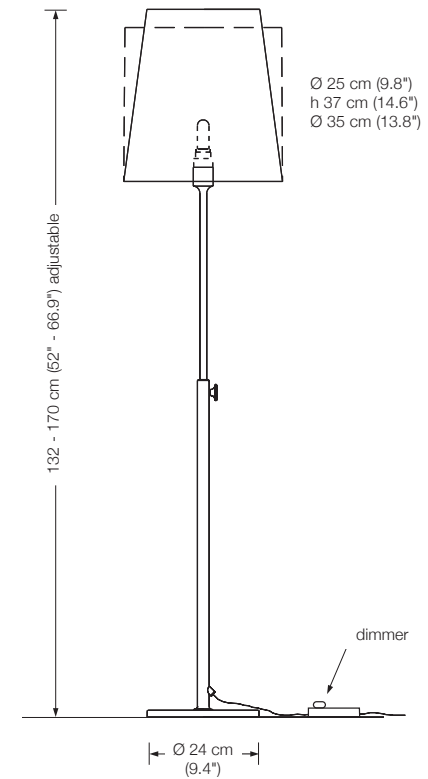

INAS SD

floor reading lamp

height: 155 - 185 cm (61" - 72.8") adjustable
 shade: silk, conical or straight*
 lampholder: E26, max. 150 W
 electric wire: 4 m (13.1 ft)
 dimmer: built in


INAS SD – Ms Solid brass polished, lacquered
 INAS SD – Mt Solid brass matt brushed, lacquered
 INAS SD – Ni Solid brass, nickel-plated
 INAS SD – Nm Solid brass nickel-plated, matt brushed
 INAS SD – Cr Solid brass, chrome-plated
 INAS SD – Cu Solid brass copper-plated, lacquered
 INAS SD – Cm Solid brass copper-plated, matt brushed, lacquered
 INAS SD – Br Solid brass bronzed, lacquered
 INAS SD – Bd Solid brass dark-bronzed, lacquered

Energy class: A++ to E
 (Depending on the used bulb.)

Additional USA 110 V conversion kit: available on request
 110 V bulbs not included

* Please indicate with order.

fabric required: 120 x 60 cm (47.3" x 23.6")

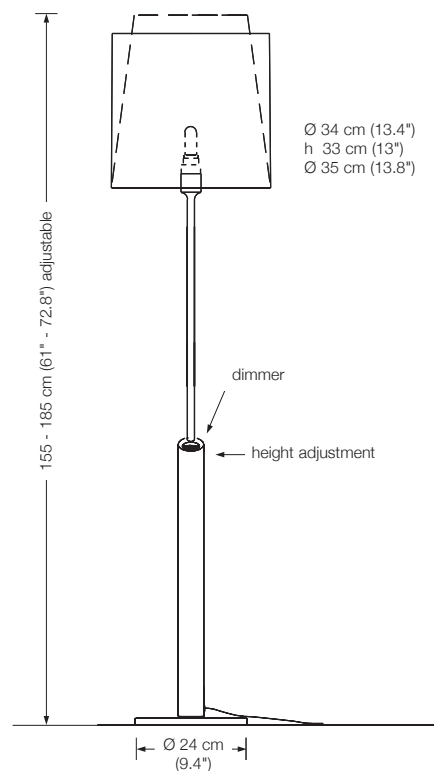

YON

floor reading lamp


height: adjustable
 shade: metal Ø 12 cm (4.7"), rotatable
 lampholder: GY6.35, max. 50 W / 12 V
 bulb: 1 x G6 incl., 35 W $\hat{=}$ 50 W, dimmable
 electric wire: 4 m (13.1 ft)
 dimmer: built in

YON – Ms	Solid brass polished, lacquered
YON – Mt	Solid brass matt brushed, lacquered
YON – Ni	Solid brass, nickel-plated
YON – Nm	Solid brass nickel-plated, matt brushed
YON – Cr	Solid brass, chrome-plated
YON – Cu	Solid brass copper-plated, lacquered
YON – Cm	Solid brass copper-plated, matt brushed, lacquered
YON – Br	Solid brass bronzed, lacquered
YON – Bd	Solid brass dark-bronzed, lacquered

Energy class: B

This model will be sold with a class B bulb.

Additional USA 110 V conversion kit: available on request

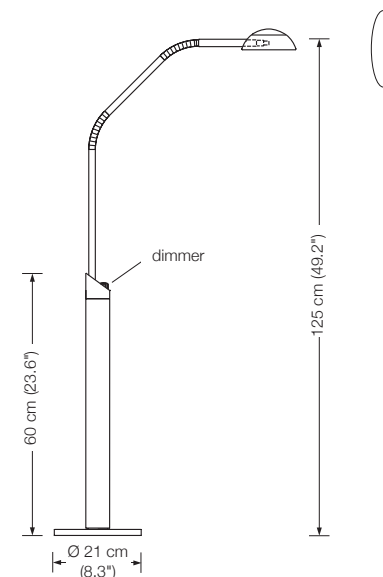

YON G

floor reading lamp

with glass tabletop Ø 30 cm (11.8"), clear glass


height: adjustable
 shade: metal Ø 12 cm (4.7"), rotatable
 lampholder: GY6.35, max. 50 W / 12 V
 bulb: 1 x G6 incl., 35 W $\hat{=}$ 50 W, dimmable
 electric wire: 4 m (13.1 ft)
 dimmer: built in

YON G – Ms	Solid brass polished, lacquered
YON G – Mt	Solid brass matt brushed, lacquered
YON G – Ni	Solid brass, nickel-plated
YON G – Nm	Solid brass nickel-plated, matt brushed
YON G – Cr	Solid brass, chrome-plated
YON G – Cu	Solid brass copper-plated, lacquered
YON G – Cm	Solid brass copper-plated, matt brushed, lacquered
YON G – Br	Solid brass bronzed, lacquered
YON G – Bd	Solid brass dark-bronzed, lacquered

Energy class: B

This model will be sold with a class B bulb.

Additional USA 110 V conversion kit: available on request

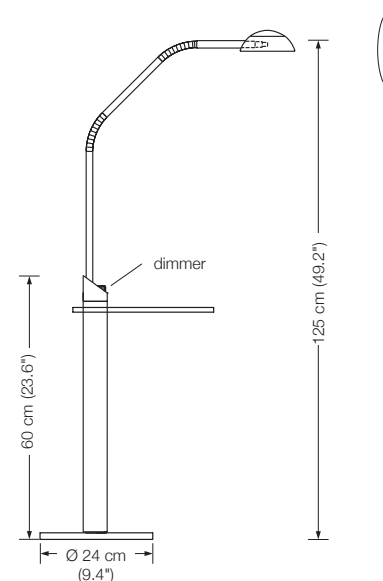





TOPAN


table lamp

height: 51 cm (20.1")
width: 55 cm (21.7")
shade: Ø 3 cm (1.2"), approx. 23 cm (9.1") long, 180° rotatable
bulb: LED-Line TW (approx. 12,5 W) incl., exchangeable
approx. 1330 Lumen
dimmmable
push button 1: tuning white infinitely variable from 2700° – 5700° K
push button 2: on / off / dimming
color rendering: > 95 Ra
electric wire: 2 m (6.6 ft)
dimmer: built in

TOPAN – Ms Solid brass polished, lacquered
TOPAN – Mt Solid brass matt brushed, lacquered
TOPAN – Ni Solid brass, nickel-plated
TOPAN – Nm Solid brass nickel-plated, matt brushed
TOPAN – Cr Solid brass, chrome-plated
TOPAN – Cu Solid brass copper-plated, lacquered
TOPAN – Cm Solid brass copper-plated, matt brushed, lacquered
TOPAN – Br Solid brass bronzed, lacquered
TOPAN – Bd Solid brass dark-bronzed, lacquered

Energy class: A++ to A

US Plug Adapter: available on request

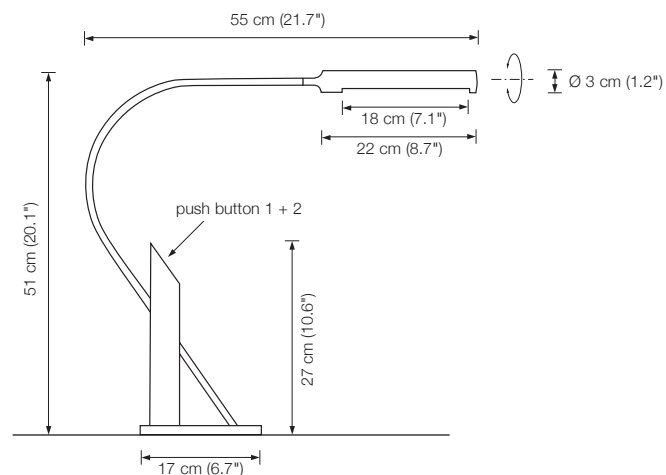



TAU

table lamp


height: approx. 50 cm
 shade: glass white-opal, Ø 36 cm (14.2")
 lampholder: 3 x E26, max. 100 Watt
 middle part: walnut mocha (standard)*
 electric wire: 2,5 m (8.2 ft)
 dimmer: built in

TAU – Ms Solid brass polished, lacquered
 TAU – Mt Solid brass matt brushed, lacquered
 TAU – Ni Solid brass, nickel-plated
 TAU – Nm Solid brass nickel-plated, matt brushed
 TAU – Cr Solid brass, chrome-plated
 TAU – Cu Solid brass copper-plated, lacquered
 TAU – Cm Solid brass copper-plated, matt brushed, lacquered
 TAU – Br Solid brass bronzed, lacquered
 TAU – Bd Solid brass dark-bronzed, lacquered

* optional: walnut cognac
 Please indicate with order.

Energy class: A+

Additional USA 110 V conversion kit: available on request
 110 V bulbs not included

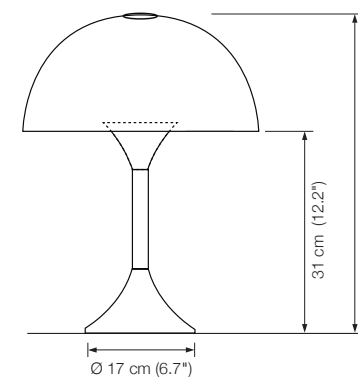





TOLED


desk lamp

height: 45 cm (17.7")
width: 70 cm (27.6")
shade: rotatable
bulb: 1 x LED 150 (approx. 6 Watt) incl.
exchangeable
approx. 600 Lumen
color temperature: warmwhite 2700 K
color rendering: > 90 Ra
electric wire: 2,5 m (8.2 ft)

TOLED – Ms Solid brass polished, lacquered
TOLED – Mt Solid brass matt brushed, lacquered
TOLED – Ni Solid brass, nickel-plated
TOLED – Nm Solid brass nickel-plated, matt brushed
TOLED – Cr Solid brass, chrome-plated
TOLED – Cu Solid brass copper-plated, lacquered
TOLED – Cm Solid brass copper-plated, matt brushed, lacquered
TOLED – Br Solid brass bronzed, lacquered
TOLED – Bd Solid brass dark-bronzed, lacquered

Energy class: A++ to A

Additional USA 110 V conversion kit: available on request

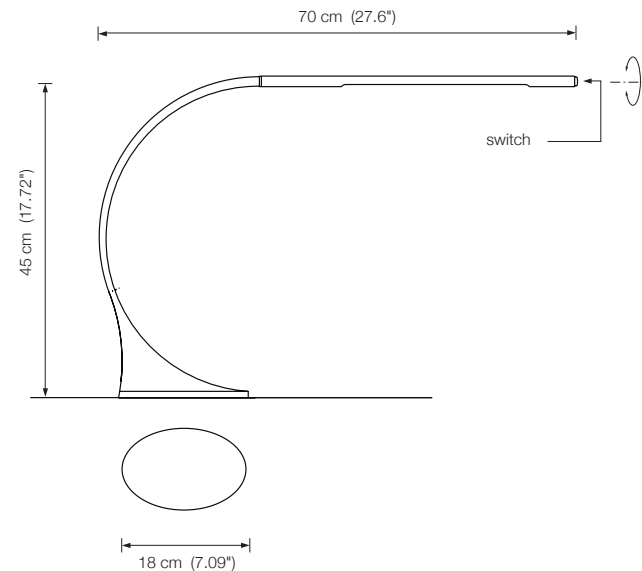

PIN T


desk lamp

height: 45 cm (17.7")
width: 70 cm (27.6")
shade: rotatable
bulb: 1 x LED 150 (approx. 6 Watt) incl.
exchangeable
approx. 600 Lumen
color temperature: warmwhite 2700 K
color rendering: > 90 Ra
electric wire: 3 m (9.8 ft)

PIN T – Ms Solid brass polished, lacquered
PIN T – Mt Solid brass matt brushed, lacquered
PIN T – Ni Solid brass, nickel-plated
PIN T – Nm Solid brass nickel-plated, matt brushed
PIN T – Cr Solid brass, chrome-plated
PIN T – Cu Solid brass copper-plated, lacquered
PIN T – Cm Solid brass copper-plated, matt brushed, lacquered
PIN T – Br Solid brass bronzed, lacquered
PIN T – Bd Solid brass dark-bronzed, lacquered

Energy class: A++ to A

Additional USA 110 V conversion kit: available on request

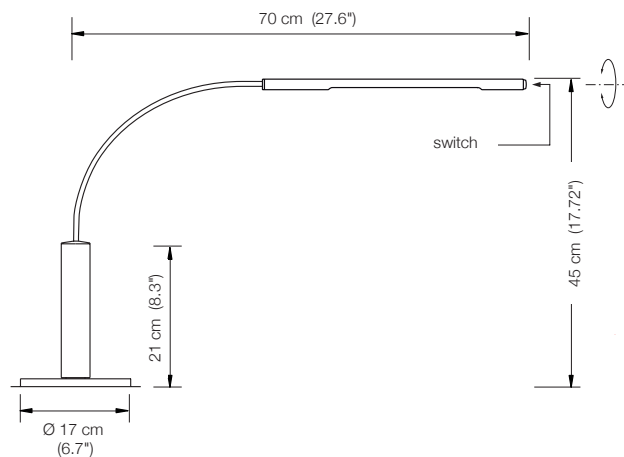



ORA


table lamp

shade: silk*
 lampholder: E26, max. 150 W
 electric wire: 3 m (9.8 ft)
 dimmer: on cord

ORA 20

metal ball Ø 20 cm (7.9")
 height: 59 cm (23.2")


ORA 20 – Ms Solid brass polished, lacquered
 ORA 20 – Mt Solid brass matt brushed, lacquered
 ORA 20 – Ni Solid brass, nickel-plated
 ORA 20 – Nm Solid brass nickel-plated, matt brushed
 ORA 20 – Cr Solid brass, chrome-plated
 ORA 20 – Cu Solid brass copper-plated, lacquered
 ORA 20 – Cm Solid brass copper-plated, matt brushed, lacquered
 ORA 20 – Br Solid brass bronzed, lacquered
 ORA 20 – Bd Solid brass dark-bronzed, lacquered

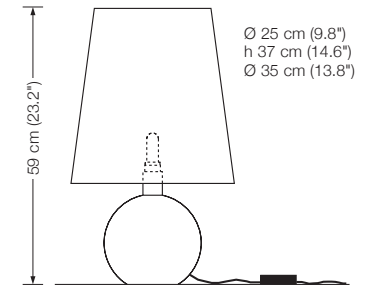

ORA 25

metal ball Ø 25 cm (9.8")
 height: 71 cm (28")

ORA 25 – Ms Solid brass polished, lacquered
 ORA 25 – Mt Solid brass matt brushed, lacquered
 ORA 25 – Ni Solid brass, nickel-plated
 ORA 25 – Nm Solid brass nickel-plated, matt brushed
 ORA 25 – Cr Solid brass, chrome-plated
 ORA 25 – Cu Solid brass copper-plated, lacquered
 ORA 25 – Cm Solid brass copper-plated, matt brushed, lacquered
 ORA 25 – Br Solid brass bronzed, lacquered
 ORA 25 – Bd Solid brass dark-bronzed, lacquered

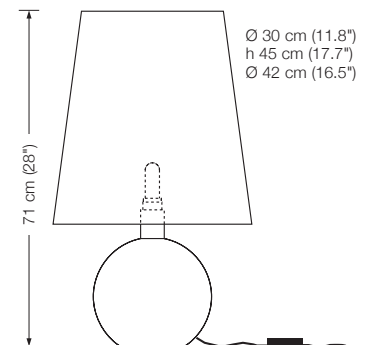

Energy class ORA 20 / 25: A++ to E
 (Depending on the used bulb.)

Additional USA 110 V conversion kit (ORA 20 / 25): available on request
 110 V bulbs not included

* fabric required ORA 20: 120 x 60 cm (47.2" x 23.6")
 fabric required ORA 25: 140 x 70 cm (55.1" x 27.6")

YON T


table lamp

shade: metal Ø 12 cm (4.7"), adjustable
 lampholder: GY6.35, max. 50 W / 12 V
 bulb: 1 x G6 incl., 35 W $\hat{=}$ 50 W, dimmable
 electric wire: 2,5 m (8.2 ft)
 dimmer: built in

YON T – Ms Solid brass polished, lacquered
 YON T – Mt Solid brass matt brushed, lacquered
 YON T – Ni Solid brass, nickel-plated
 YON T – Nm Solid brass nickel-plated, matt brushed
 YON T – Cr Solid brass, chrome-plated
 YON T – Cu Solid brass copper-plated, lacquered
 YON T – Cm Solid brass copper-plated, matt brushed, lacquered
 YON T – Br Solid brass bronzed, lacquered
 YON T – Bd Solid brass dark-bronzed, lacquered

Energy class: B
This model will be sold with a class B bulb.

Additional USA 110 V conversion kit: available on request

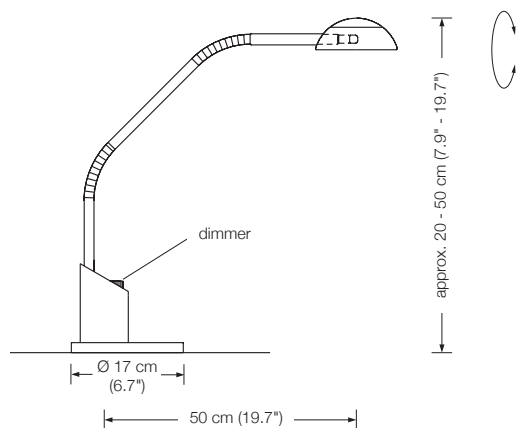



TOA

table lamp

flexible and specially reinforced metal arm


height: up to max. 50 cm (19.7")
 shade: TEFLON white, Ø 7 cm (2.8")
 lampholder: GY6.35, max. 20 W / 12 V
 bulb: 1 x G6 incl., dimmable
 electric wire: 2,5 m (8.2 ft)
 dimmer: built in

TOA – Ms	Solid brass polished, lacquered
TOA – Mt	Solid brass matt brushed, lacquered
TOA – Ni	Solid brass, nickel-plated
TOA – Nm	Solid brass nickel-plated, matt brushed
TOA – Cr	Solid brass, chrome-plated
TOA – Cu	Solid brass copper-plated, lacquered
TOA – Cm	Solid brass copper-plated, matt brushed, lacquered
TOA – Br	Solid brass bronzed, lacquered
TOA – Bd	Solid brass dark-bronzed, lacquered

Energy class: B

This model will be sold with a class B bulb.

Additional USA 110 V conversion kit: available on request

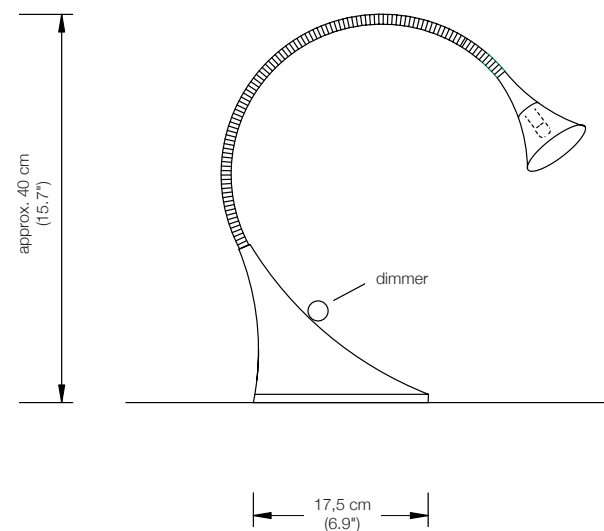

ESA

table lamp

flexible and specially reinforced metal arm


height: up to 50 cm (19.7")
shade: TEFLON white, Ø 7 cm (2.8")
lampholder: GY6.35, max. 50 W
bulb: 1 x G6 incl., 35 W $\triangleq$ 50 W, dimmable
electric wire: 2,5 m (8.2 ft)
dimmer: built in

ESA – Ms	Solid brass polished, lacquered
ESA – Mt	Solid brass matt brushed, lacquered
ESA – Ni	Solid brass, nickel-plated
ESA – Nm	Solid brass nickel-plated, matt brushed
ESA – Cr	Solid brass, chrome-plated
ESA – Cu	Solid brass copper-plated, lacquered
ESA – Cm	Solid brass copper-plated, matt brushed, lacquered
ESA – Br	Solid brass bronzed, lacquered
ESA – Bd	Solid brass dark-bronzed, lacquered

Energy class: B

This model will be sold with a class B bulb.

Additional USA 110 V conversion kit: available on request

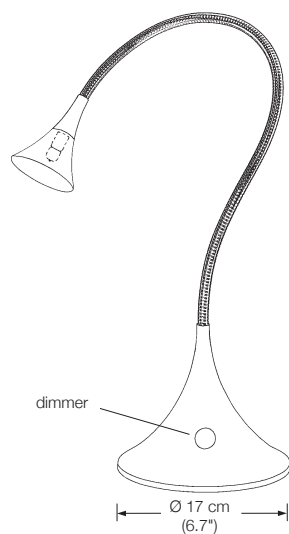



ELAS

table lamp

height: 50 - 70 cm (19.7" - 27.6") adjustable
 shade: metal Ø 28 cm (11")
 lampholder: E26, max. 100 W
 electric wire: 2,5 m (8.2 ft)
 dimmer: on cord

ELAS - Ms Solid brass polished, lacquered
 ELAS - Mt Solid brass matt brushed, lacquered
 ELAS - Ni Solid brass, nickel-plated
 ELAS - Nm Solid brass nickel-plated, matt brushed
 ELAS - Cr Solid brass, chrome-plated
 ELAS - Cu Solid brass copper-plated, lacquered
 ELAS - Cm Solid brass copper-plated, matt brushed, lacquered
 ELAS - Br Solid brass bronzed, lacquered
 ELAS - Bd Solid brass dark-bronzed, lacquered

ELAS S

table lamp


height: 50 - 70 cm (19.7" - 27.6") adjustable
 shade: silk* Ø 28 cm (11")
 lampholder: E26, max. 100 W
 electric wire: 2,5 m (8.2 ft)
 dimmer: on cord

ELAS S - Ms Solid brass polished, lacquered
 ELAS S - Mt Solid brass matt brushed, lacquered
 ELAS S - Ni Solid brass, nickel-plated
 ELAS S - Nm Solid brass nickel-plated, matt brushed
 ELAS S - Cr Solid brass, chrome-plated
 ELAS S - Cu Solid brass copper-plated, lacquered
 ELAS S - Cm Solid brass copper-plated, matt brushed, lacquered
 ELAS S - Br Solid brass bronzed, lacquered
 ELAS S - Bd Solid brass dark-bronzed, lacquered

* fabric required: 50 x 80 cm (19.7" x 31.5")

Energy class ELAS / ELAS S: A++ to E
 (Depending on the used bulb.)

Additional USA 110 V conversion kit (ELAS / ELAS S): available on request
 110 V bulbs not included

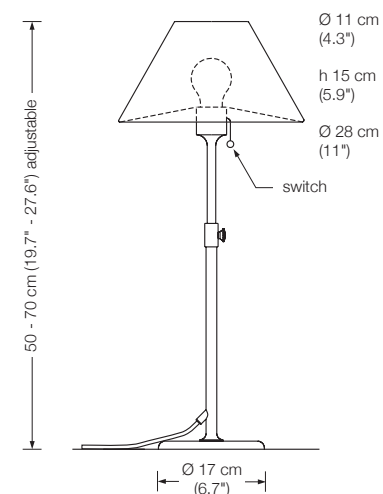

wall lamp


height:	35 cm (13.8")
width:	60 cm (23.6")
bulb:	1 x LED-Line 150 (approx. 8,4 Watt) incl. exchangeable approx. 840 Lumen
color temperature:	warmwhite 2700 K
color rendering:	> 90 Ra
dimmer:	built in


PIN W dim – Ms	Solid brass polished, lacquered
PIN W dim – Mt	Solid brass matt brushed, lacquered
PIN W dim – Ni	Solid brass, nickel-plated
PIN W dim – Nm	Solid brass nickel-plated, matt brushed
PIN W dim – Cr	Solid brass, chrome-plated
PIN W dim – Cu	Solid brass copper-plated, lacquered
PIN W dim – Cm	Solid brass copper-plated, matt brushed, lacquered
PIN W dim – Br	Solid brass bronzed, lacquered
PIN W dim – Bd	Solid brass dark-bronzed, lacquered

Energy class: A++ to A.

4" junction box: not covered

Backplate rectangular 25 x 10 cm (9.8" x 3.9", standard)
or 25 x 12 cm (9.8" x 4.7", please indicate with order)

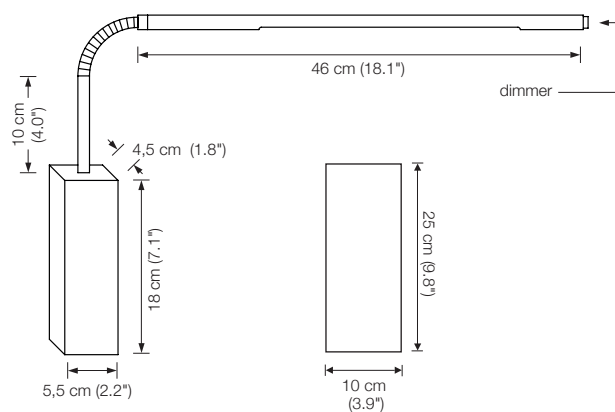

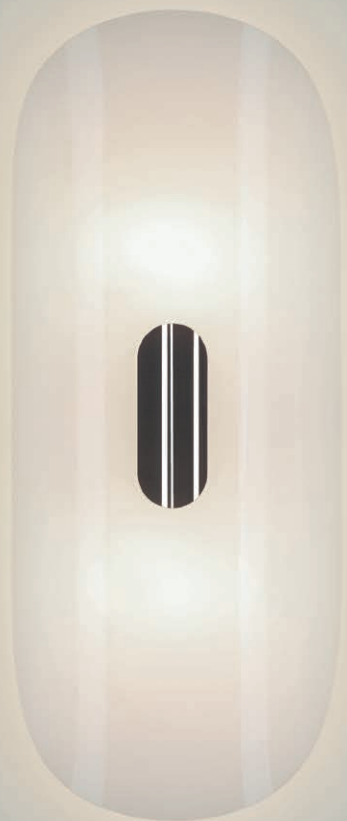

GEA

wall lamp


height: 43 cm (16.9")
 shade: glass white-opal
 lampholder: 2 x E26, max. 2 x 100 W
 dimmer: on site

GEA – Ms Solid brass polished, lacquered
 GEA – Mt Solid brass matt brushed, lacquered
 GEA – Ni Solid brass, nickel-plated
 GEA – Nm Solid brass nickel-plated, matt brushed
 GEA – Cr Solid brass, chrome-plated
 GEA – Cu Solid brass copper-plated, lacquered
 GEA – Cm Solid brass copper-plated, matt brushed, lacquered
 GEA – Br Solid brass bronzed, lacquered
 GEA – Bd Solid brass dark-bronzed, lacquered

Energy class: A++ to E
 (Depending on the used bulb.)

4" junction box: not covered
 Backplate rectangular 25 x 10 cm (9.8" x 3.9", standard)
 or 25 x 12 cm (9.8" x 4.7", please indicate with order)

Additional USA 110 V conversion kit: available on request
 110 V bulbs not included

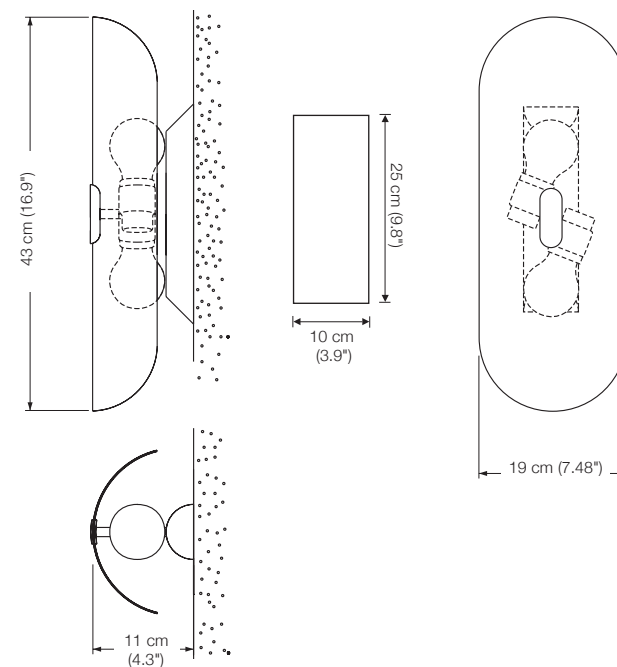


ALIA

wall lamp, indirect light

height: 47 cm (18.5")
 shade: metal
 lampholder: 2 x E26, max. 2 x 100 W
 dimmer: on site

ALIA – Ms Solid brass polished, lacquered
 ALIA – Mt Solid brass matt brushed, lacquered
 ALIA – Ni Solid brass, nickel-plated
 ALIA – Nm Solid brass nickel-plated, matt brushed
 ALIA – Cr Solid brass, chrome-plated
 ALIA – Cu Solid brass copper-plated, lacquered
 ALIA – Cm Solid brass copper-plated, matt brushed, lacquered
 ALIA – Br Solid brass bronzed, lacquered
 ALIA – Bd Solid brass dark-bronzed, lacquered

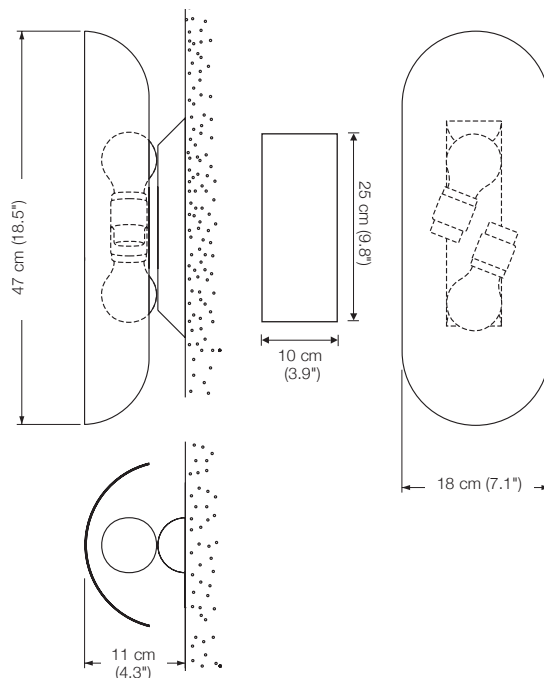


ALEA

wall lamp indirect light

height: 35 cm (13.8")
 shade: metal
 lampholder: 2 x E12, max. 60 W
 dimmer: on site

ALEA – Ms Solid brass polished, lacquered
 ALEA – Mt Solid brass matt brushed, lacquered
 ALEA – Ni Solid brass, nickel-plated
 ALEA – Nm Solid brass nickel-plated, matt brushed
 ALEA – Cr Solid brass, chrome-plated
 ALEA – Cu Solid brass copper-plated, lacquered
 ALEA – Cm Solid brass copper-plated, matt brushed, lacquered
 ALEA – Br Solid brass bronzed, lacquered
 ALEA – Bd Solid brass dark-bronzed, lacquered

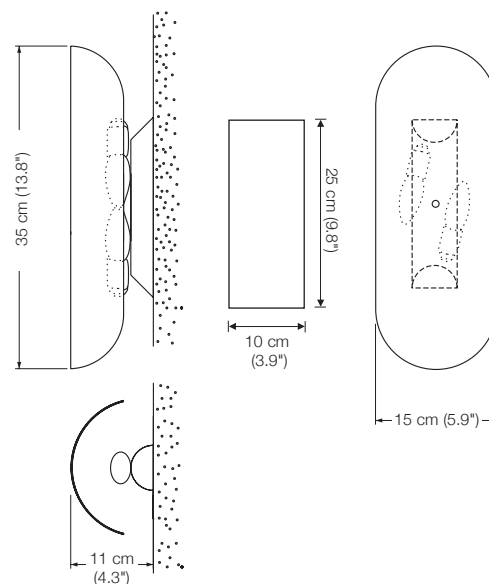

Energy class (ALIA / ALEA): A++ to E
 (Depending on the used bulb.)

4" junction box: not covered
 Backplate rectangular 25 x 10 cm (9.8" x 3.9", standard)
 or 25 x 12 cm (9.8" x 4.7", please indicate with order)

Additional USA 110 V conversion kit (ALIA / ALEA): available on request
 110 V bulbs not included





BEO


wall and stairway lamp
direct and indirect light
glass diffuser top and bottom

width: 36 cm (14.2")
 lampholder: 2 x E26, max. 2 x 100 W

BEO – Ms	Solid brass polished, lacquered
BEO – Mt	Solid brass matt brushed, lacquered
BEO – Ni	Solid brass, nickel-plated
BEO – Nm	Solid brass nickel-plated, matt brushed
BEO – Cr	Solid brass, chrome-plated
BEO – Cu	Solid brass copper-plated, lacquered
BEO – Cm	Solid brass copper-plated, matt brushed, lacquered
BEO – Br	Solid brass bronzed, lacquered
BEO – Bd	Solid brass dark-bronzed, lacquered

Energy class: A++ to E
 (Depending on the used bulb.)

4" junction box: covered
 Additional USA 110 V conversion kit: available on request
 110 V bulbs not included

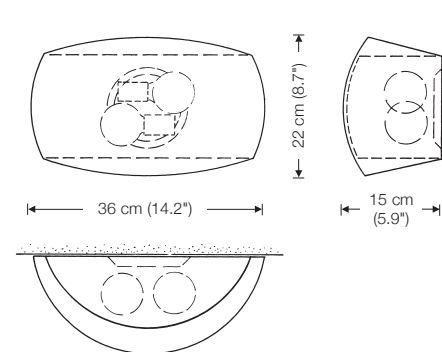

WED

wall lamp

width: 40 cm (15.7")
 lampholder: GU5.3
 bulb: 1 x GU5.3 incl.
 approx. 660 Lumen
 color temperature: warmwhite 2700 K
 color rendering: > 82 Ra

WED – Ms Solid brass polished, lacquered
 WED – Mt Solid brass matt brushed, lacquered
 WED – Ni Solid brass, nickel-plated
 WED – Nm Solid brass nickel-plated, matt brushed
 WED – Cr Solid brass, chrome-plated
 WED – Cu Solid brass copper-plated, lacquered
 WED – Cm Solid brass copper-plated, matt brushed, lacquered
 WED – Br Solid brass bronzed, lacquered
 WED – Bd Solid brass dark-bronzed, lacquered


Energy class: A++ to A


Replacement bulbs can be ordered through VS Manufaktur.

4" junction box: not covered

Backplate Ø 12 cm (4.72") (please indicate with order)

Additional USA 110 V conversion kit: available on request

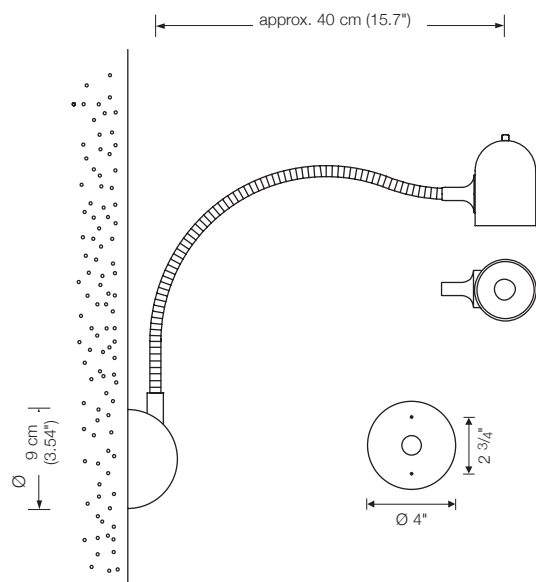

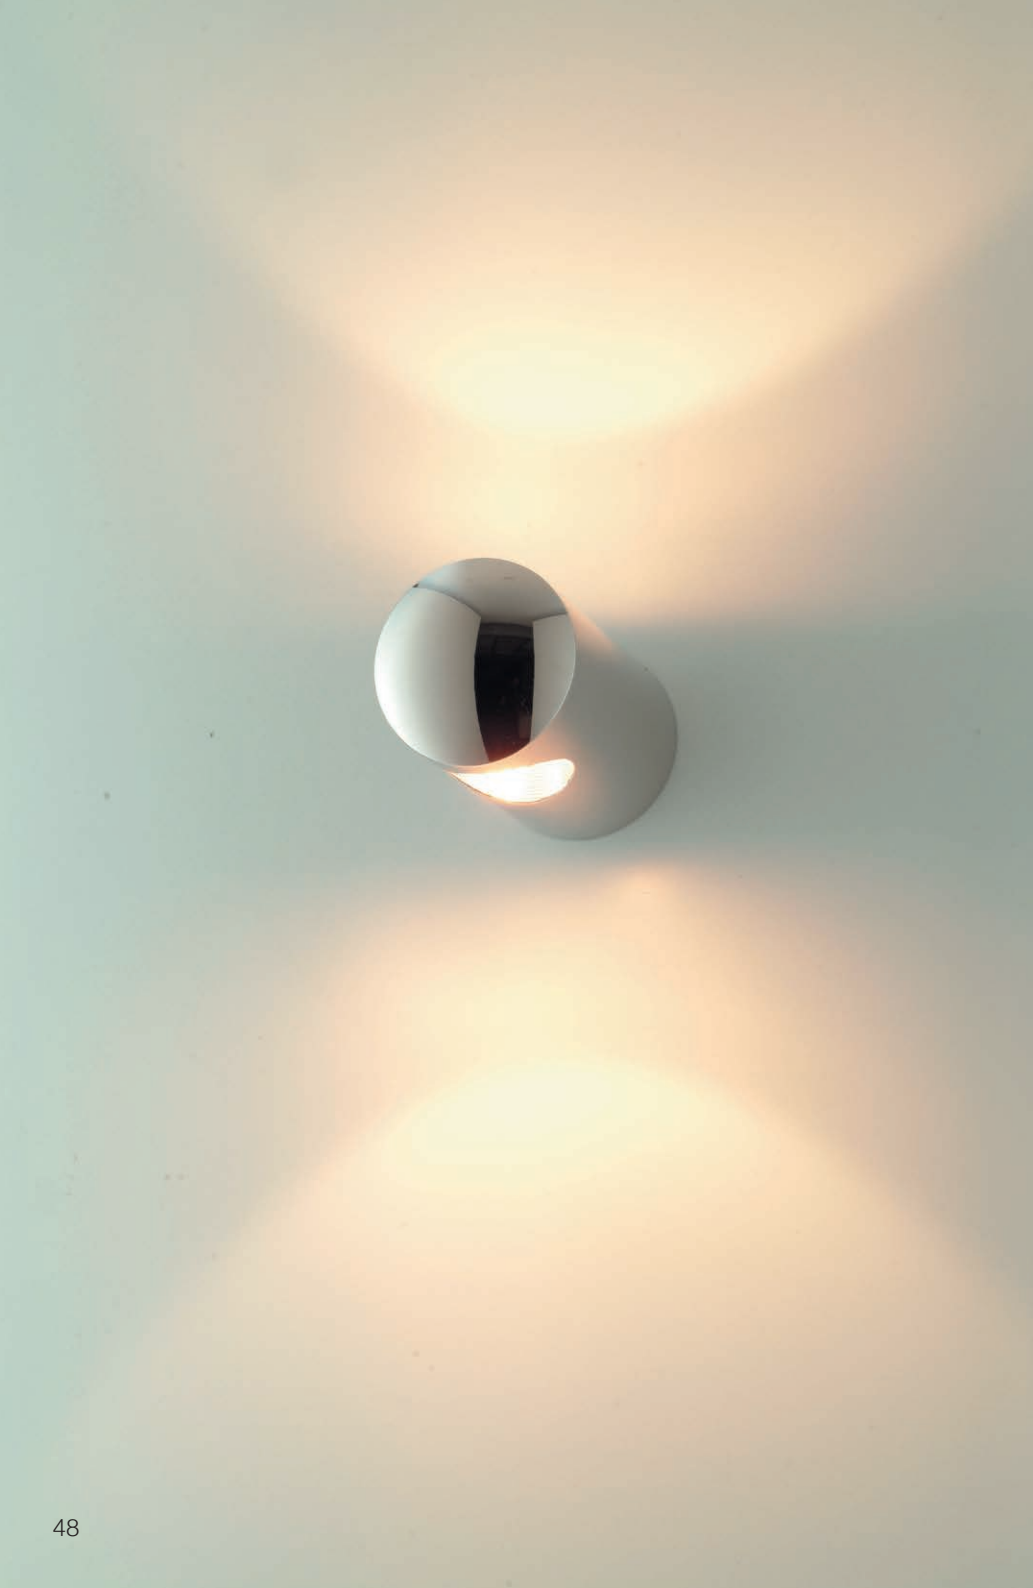

CINA W

wall lamp




width: approx. 14 cm (5.5")
lampholder: G9, max 75 W
bulb: 1 x G9 incl.

CINA W – Ms	Solid brass polished, lacquered
CINA W – Mt	Solid brass matt brushed, lacquered
CINA W – Ni	Solid brass, nickel-plated
CINA W – Nm	Solid brass nickel-plated, matt brushed
CINA W – Cr	Solid brass, chrome-plated
CINA W – Cu	Solid brass copper-plated, lacquered
CINA W – Cm	Solid brass copper-plated, matt brushed, lacquered
CINA W – Br	Solid brass bronzed, lacquered
CINA W – Bd	Solid brass dark-bronzed, lacquered

Energy class: D
This model will be sold with a class D bulb.

Backplate Ø 12 cm (4.72") (please indicate with order)

Additional USA 110 V conversion kit: available on request
110 V bulbs not included



VAO

wall lamp,
flexible and specially reinforced metal arm

height: approx. 44 cm (17.3")
shade: TEFLON white, Ø 7 cm (2.8")
lampholder: GY6.35, max. 20 W / 12 V
bulb: 1 x G6 incl., 35 W $\hat{=}$ 50 W, dimmable
dimmer: built in


VAO – Ms	Solid brass polished, lacquered
VAO – Mt	Solid brass matt brushed, lacquered
VAO – Ni	Solid brass, nickel-plated
VAO – Nm	Solid brass nickel-plated, matt brushed
VAO – Cr	Solid brass, chrome-plated
VAO – Cu	Solid brass copper-plated, lacquered
VAO – Cm	Solid brass copper-plated, matt brushed, lacquered
VAO – Br	Solid brass bronzed, lacquered
VAO – Bd	Solid brass dark-bronzed, lacquered

Energy class: C

This model will be sold with a class C bulb.

4" junction box: covered

Additional USA 110 V conversion kit: available on request

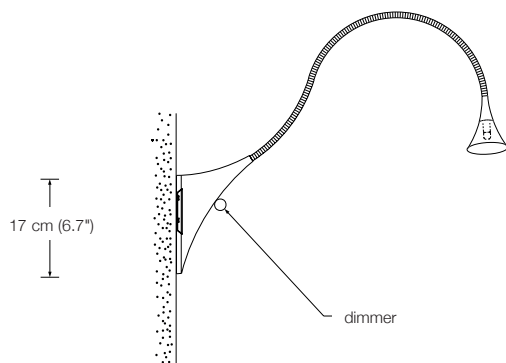



VEA wall lamp

Discontinued Model


width: 40 cm (15.7")
 shade: glass white-opal
 top glass diffuser
 lampholder: 2 x B15d, max. 150 W each
 bulb: 2 x B15d, 100 W incl.

VEA – Ms Solid brass polished, lacquered
 VEA – Mt Solid brass matt brushed, lacquered
 VEA – Ni Solid brass, nickel-plated
 VEA – Nm Solid brass nickel-plated, matt brushed
 VEA – Cr Solid brass, chrome-plated
 VEA – Cu Solid brass copper-plated, lacquered
 VEA – Cm Solid brass copper-plated, matt brushed, lacquered
 VEA – Br Solid brass bronzed, lacquered
 VEA – Bd Solid brass dark-bronzed, lacquered

Energy class: D
This model will be sold with a class D bulb.

4" junction box: not covered
 Backplate Ø 12 cm (4.72") (please indicate with order)

Additional USA 110 V conversion kit: available on request

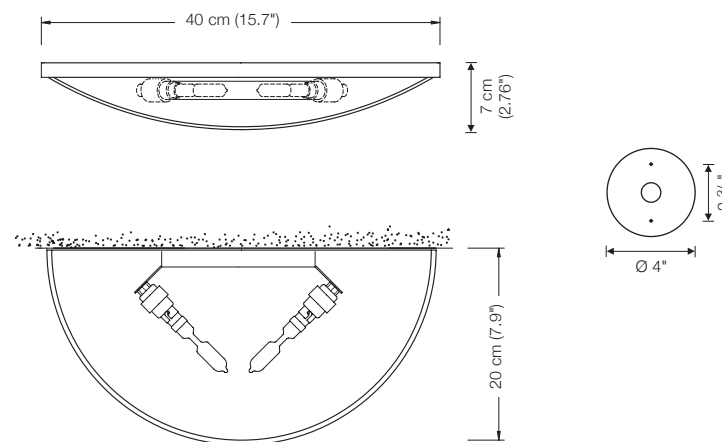

ERA 33 wall lamp

width: 33 cm (13")
bottom glass diffuser
lampholder: 2 x G9, max. 2 x 75 W / 230 V
bulb: 2 x G9, 60 W incl.

ERA 33 – Ms Solid brass polished, lacquered
ERA 33 – Mt Solid brass matt brushed, lacquered
ERA 33 – Ni Solid brass, nickel-plated
ERA 33 – Nm Solid brass nickel-plated, matt brushed
ERA 33 – Cr Solid brass, chrome-plated
ERA 33 – Cu Solid brass copper-plated, lacquered
ERA 33 – Cm Solid brass copper-plated, matt brushed, lacquered
ERA 33 – Br Solid brass bronzed, lacquered
ERA 33 – Bd Solid brass dark-bronzed, lacquered
additional top glass diffuser
Please indicate with order.

Energy class: D
This model will be sold with a class D bulb.

4" junction box: not covered
Additional USA 110 V conversion kit: available on request
110 V bulbs not included


ERA 40 wall lamp

width: 40 cm (15.7")
bottom glass diffuser
lampholder: B15d, max. 150 W / 230 V
bulb: 1 x B15d, 100 W incl.

ERA 40 – Ms Solid brass polished, lacquered
ERA 40 – Mt Solid brass matt brushed, lacquered
ERA 40 – Ni Solid brass, nickel-plated
ERA 40 – Nm Solid brass nickel-plated, matt brushed
ERA 40 – Cr Solid brass, chrome-plated
ERA 40 – Cu Solid brass copper-plated, lacquered
ERA 40 – Cm Solid brass copper-plated, matt brushed, lacquered
ERA 40 – Br Solid brass bronzed, lacquered
ERA 40 – Bd Solid brass dark-bronzed, lacquered
additional top glass diffuser
Please indicate with order.

Energy class: D
This model will be sold with a class D bulb.

4" junction box: not covered
Additional USA 110 V conversion kit: available on request
110 V bulbs not included

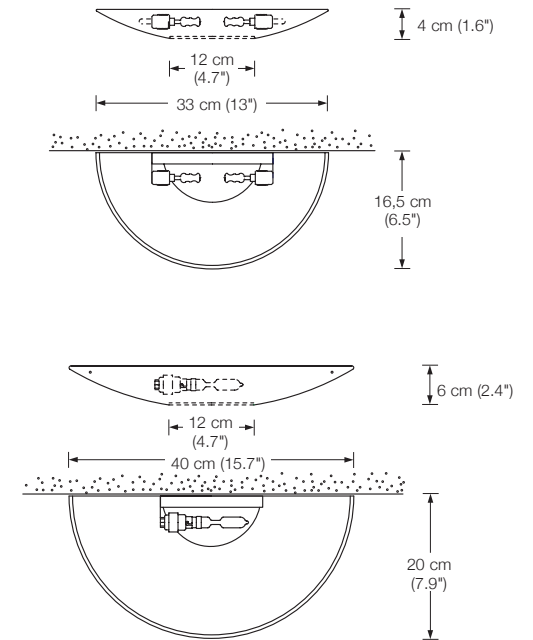



EREA 55

ceiling lamp

height: standard 60 cm (23.6")
or on request
(min. 40 cm (15.7") to max. 200 cm (78.7"))

shade: glass white-opal Ø 55 cm (21.7")

lampholder: 6 x E12, max. 6 x 60 W

dimmer: possible via house installation or Casambi*




EREA 55 – Ms	Solid brass polished, lacquered
EREA 55 – Mt	Solid brass matt brushed, lacquered
EREA 55 – Ni	Solid brass, nickel-plated
EREA 55 – Nm	Solid brass nickel-plated, matt brushed
EREA 55 – Cr	Solid brass, chrome-plated
EREA 55 – Cu	Solid brass copper-plated, lacquered
EREA 55 – Cm	Solid brass copper-plated, matt brushed, lacquered
EREA 55 – Br	Solid brass bronzed, lacquered
EREA 55 – Bd	Solid brass dark-bronzed, lacquered

Energy class: A++ to E
(Depending on the used bulb.)

4" junction box: not covered
Backplate Ø 12 cm (4.72") (please indicate with order)
Additional 110 V conversion kit: available on request
110 V bulbs not included

* We recommend (without obligation) the following dimmer brands:

- Jung 1731DD
- Feller 40300.RC
- Arditì 027505
- Casambi Dimmer 800598 / 800680
- Kopp 8033

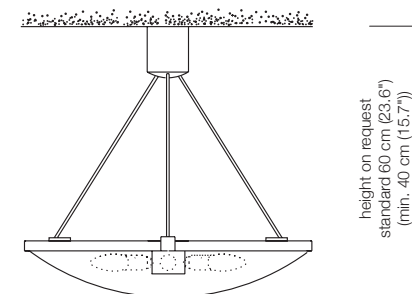

EREA 80

ceiling lamp

height: standard 100 cm (39.4")
or on request
(min. 60 cm (23.6") to max. 200 cm (78.7"))

shade: glass white-opal Ø 80 cm (31.5")

lampholder: 6 x E26, max. 6 x 205 W

dimmer: possible via house installation or Casambi*




EREA 80 – Ms	Solid brass polished, lacquered
EREA 80 – Mt	Solid brass matt brushed, lacquered
EREA 80 – Ni	Solid brass, nickel-plated
EREA 80 – Nm	Solid brass nickel-plated, matt brushed
EREA 80 – Cr	Solid brass, chrome-plated
EREA 80 – Cu	Solid brass copper-plated, lacquered
EREA 80 – Cm	Solid brass copper-plated, matt brushed, lacquered
EREA 80 – Br	Solid brass bronzed, lacquered
EREA 80 – Bd	Solid brass dark-bronzed, lacquered

Energy class: A++ to E
(Depending on the used bulb.)

4" junction box: not covered
Backplate Ø 12 cm (4.72") (please indicate with order)
Additional 110 V conversion kit: available on request
110 V bulbs not included

* We recommend (without obligation) the following dimmer brands:

- Jung 1731DD
- Feller 40300.RC
- Arditì 027505
- Casambi Dimmer 800598 / 800680
- Kopp 8033

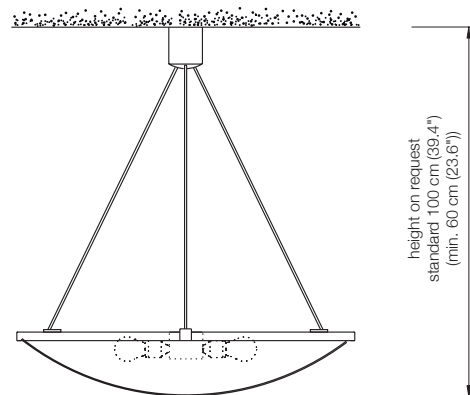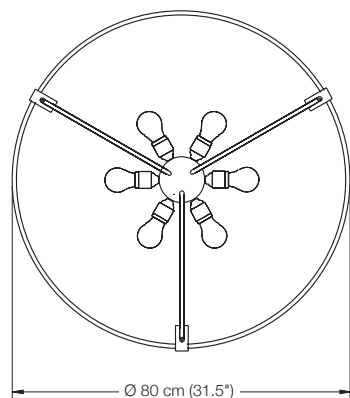



SOLA 80

ceiling lamp
direct and indirect light
bottom glass diffuser

height: 36 - 65 cm (14.2" - 25.6") adjustable *
shade: metal Ø 80 cm (31.5")
lampholder: R7s, max. 500 W
bulb: 1 x R7s incl.
dimmer: possible via house installation

SOLA 80 – Ms	Solid brass polished, lacquered
SOLA 80 – Mt	Solid brass matt brushed, lacquered
SOLA 80 – Ni	Solid brass, nickel-plated
SOLA 80 – Nm	Solid brass nickel-plated, matt brushed
SOLA 80 – Cr	Solid brass, chrome-plated
SOLA 80 – Cu	Solid brass copper-plated, lacquered
SOLA 80 – Cm	Solid brass copper-plated, matt brushed, lacquered
SOLA 80 – Br	Solid brass bronzed, lacquered
SOLA 80 – Bd	Solid brass dark-bronzed, lacquered


Energy class: D

This model will be sold with a class D bulb.

4" junction box: covered

Additional USA 110 V conversion kit: available on request

* special length on request


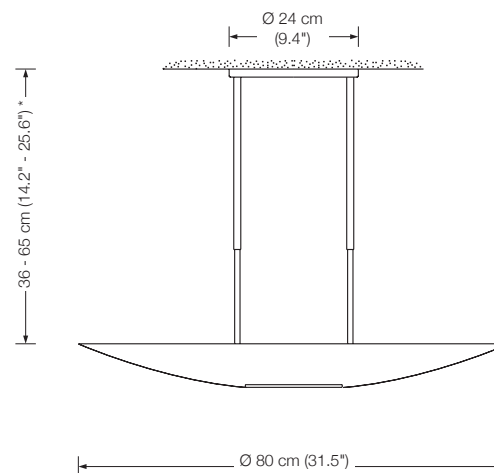


SELA 55

ceiling lamp, indirect lighting

shade: metal Ø 55 cm (21.7")
 lampholder: 5 x E26, max. 5 x 100 W
 dimmer: possible via house installation or Casambi*

SELA 55 – Ms	Solid brass polished, lacquered
SELA 55 – Mt	Solid brass matt brushed, lacquered
SELA 55 – Ni	Solid brass, nickel-plated
SELA 55 – Nm	Solid brass nickel-plated, matt brushed
SELA 55 – Cr	Solid brass, chrome-plated
SELA 55 – Cu	Solid brass copper-plated, lacquered
SELA 55 – Cm	Solid brass copper-plated, matt brushed, lacquered
SELA 55 – Br	Solid brass bronzed, lacquered
SELA 55 – Bd	Solid brass dark-bronzed, lacquered


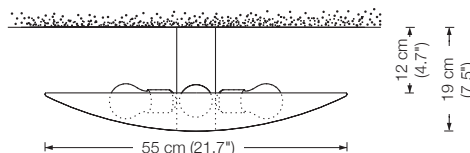


SELA 40

ceiling lamp, indirect lighting

shade: metal Ø 40 cm (15.7")
 lampholder: 5 x E12, max. 5 x 60 W
 dimmer: possible via house installation or Casambi*

SELA 40 – Ms	Solid brass polished, lacquered
SELA 40 – Mt	Solid brass matt brushed, lacquered
SELA 40 – Ni	Solid brass, nickel-plated
SELA 40 – Nm	Solid brass nickel-plated, matt brushed
SELA 40 – Cr	Solid brass, chrome-plated
SELA 40 – Cu	Solid brass copper-plated, lacquered
SELA 40 – Cm	Solid brass copper-plated, matt brushed, lacquered
SELA 40 – Br	Solid brass bronzed, lacquered
SELA 40 – Bd	Solid brass dark-bronzed, lacquered




special length (distance to wall / ceiling) on request

Energy class SELA 55 / 40: A++ to E
 (Depending on the used bulb.)

* We recommend (without obligation) the following
 dimmer brands:

- Jung 1731DD
- Feller 40300.RC
- Ardit 027505
- Casambi Dimmer 800598 / 800680
- Kopp 8033

SELA 40 / 55:
 4" junction box: not covered
 Backplate Ø 12 cm (4.72")
 (please indicate with order)
 Additional 110 V conversion kit:
 available on request
 110 V bulbs not included



GELA 40


Wand- / Deckenleuchte

shade: glass white-opal Ø 40 cm (15.7")
 lampholder: 5 x E12, max. 5 x 60 W
 dimmer: possible via house installation or Casambi*

GELA 40 – Ms	Solid brass polished, lacquered
GELA 40 – Mt	Solid brass matt brushed, lacquered
GELA 40 – Ni	Solid brass, nickel-plated
GELA 40 – Nm	Solid brass nickel-plated, matt brushed
GELA 40 – Cr	Solid brass, chrome-plated
GELA 40 – Cu	Solid brass copper-plated, lacquered
GELA 40 – Cm	Solid brass copper-plated, matt brushed, lacquered
GELA 40 – Br	Solid brass bronzed, lacquered
GELA 40 – Bd	Solid brass dark-bronzed, lacquered

special length (distance to wall / ceiling) on request

Energy class: A++ to E
 (Depending on the used bulb.)

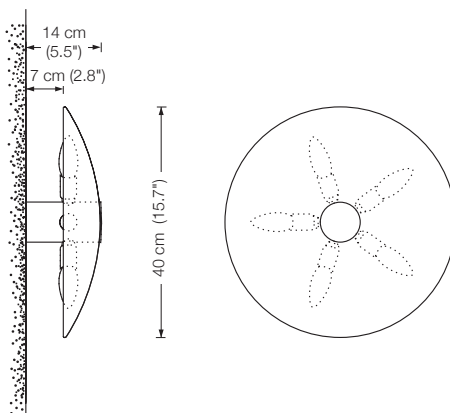

GELA 55


ceiling lamp

shade: glass white-opal Ø 55 cm (21.7")
 lampholder: 5 x E26, max. 5 x 100 W
 dimmer: possible via house installation or Casambi*

GELA 55 – Ms	Solid brass polished, lacquered
GELA 55 – Mt	Solid brass matt brushed, lacquered
GELA 55 – Ni	Solid brass, nickel-plated
GELA 55 – Nm	Solid brass nickel-plated, matt brushed
GELA 55 – Cr	Solid brass, chrome-plated
GELA 55 – Cu	Solid brass copper-plated, lacquered
GELA 55 – Cm	Solid brass copper-plated, matt brushed, lacquered
GELA 55 – Br	Solid brass bronzed, lacquered
GELA 55 – Bd	Solid brass dark-bronzed, lacquered

special length (distance to wall / ceiling) on request

Energy class: A++ to E
 (Depending on the used bulb.)

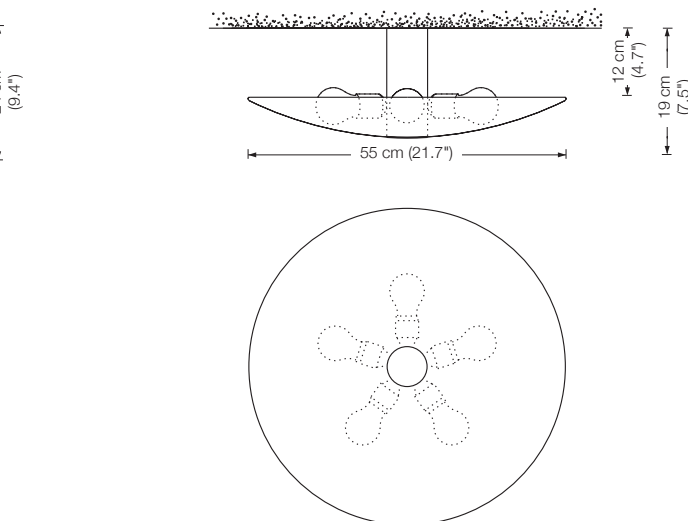

GELA 80



ceiling lamp

shade: glass white-opal Ø 80 cm (31.5")
 lampholder: 7 x E26, max. 7 x 100 W
 dimmer: possible via house installation or Casambi*

GELA 80 – Ms	Solid brass polished, lacquered
GELA 80 – Mt	Solid brass matt brushed, lacquered
GELA 80 – Ni	Solid brass, nickel-plated
GELA 80 – Nm	Solid brass nickel-plated, matt brushed
GELA 80 – Cr	Solid brass, chrome-plated
GELA 80 – Cu	Solid brass copper-plated, lacquered
GELA 80 – Cm	Solid brass copper-plated, matt brushed, lacquered
GELA 80 – Br	Solid brass bronzed, lacquered
GELA 80 – Bd	Solid brass dark-bronzed, lacquered

special length (distance to wall / ceiling) on request

Energy class: A++ to E
 (Depending on the used bulb.)

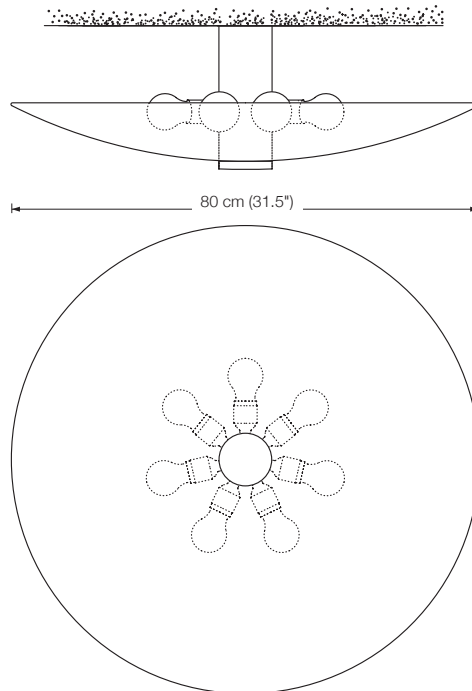

GELA 40 / 55 / 80: 4" junction box: not covered
 Backplate Ø 12 cm (4.72") (please indicate with order)
 Additional 110 V conversion kit: available on request
 110 V bulbs not included

* We recommend (without obligation) the following dimmer brands:

- Jung 1731DD
- Feller 40300.RC
- Ardit 027505
- Casambi Dimmer 800598 / 800680
- Kopp 8033





OLA 25


ceiling lamp

height: 14 cm (5.5")
 shade: glass white-opal, Ø 25 cm (9.8")
 lampholder: 2 x E26, max. 2 x 100 W
 dimmer: possible via house installation

OLA 25 – Ms Solid brass polished, lacquered
 OLA 25 – Mt Solid brass matt brushed, lacquered
 OLA 25 – Ni Solid brass, nickel-plated
 OLA 25 – Nm Solid brass nickel-plated, matt brushed
 OLA 25 – Cr Solid brass, chrome-plated
 OLA 25 – Cu Solid brass copper-plated, lacquered
 OLA 25 – Cm Solid brass copper-plated, matt brushed, lacquered
 OLA 25 – Br Solid brass bronzed, lacquered
 OLA 25 – Bd Solid brass dark-bronzed, lacquered

Energy class: A++ to E
 (Depending on the used bulb.)

4" junction box: covered
 Additional USA 110 V conversion kit: available on request
 110 V bulbs not included

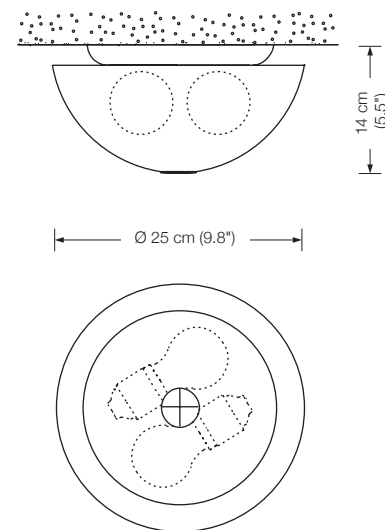

OLA 36


ceiling lamp

height: 20 cm (7.9")
 shade: glass white-opal, Ø 36 cm (14.2")
 lampholder: 3 x E26, max. 3 x 100 W
 dimmer: possible via house installation

OLA 36 – Ms Solid brass polished, lacquered
 OLA 36 – Mt Solid brass matt brushed, lacquered
 OLA 36 – Ni Solid brass, nickel-plated
 OLA 36 – Nm Solid brass nickel-plated, matt brushed
 OLA 36 – Cr Solid brass, chrome-plated
 OLA 36 – Cu Solid brass copper-plated, lacquered
 OLA 36 – Cm Solid brass copper-plated, matt brushed, lacquered
 OLA 36 – Br Solid brass bronzed, lacquered
 OLA 36 – Bd Solid brass dark-bronzed, lacquered

Energy class: A++ to E
 (Depending on the used bulb.)

4" junction box: covered
 Additional USA 110 V conversion kit: available on request
 110 V bulbs not included

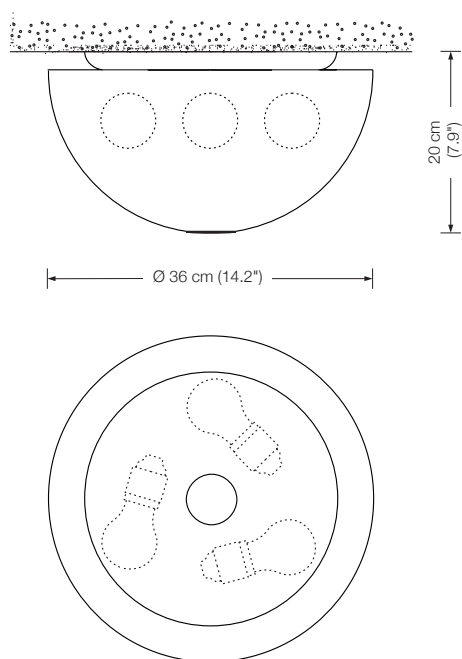



DUOS 36 P – Pendant **Pendant lamp**

canopy: Ø 12 cm (4.7")
 shade: metal Ø 36 cm (14.2")
 lampholder: E26, max. 100 W

DUOS 36 P – Ms Solid brass polished, lacquered
 DUOS 36 P – Mt Solid brass matt brushed, lacquered
 DUOS 36 P – Ni Solid brass, nickel-plated
 DUOS 36 P – Nm Solid brass nickel-plated, matt brushed
 DUOS 36 P – Cr Solid brass, chrome-plated
 DUOS 36 P – Cu Solid brass copper-plated, lacquered
 DUOS 36 P – Cm Solid brass copper-plated, matt brushed, lacquered
 DUOS 36 P – Br Solid brass bronzed, lacquered
 DUOS 36 P – Bd Solid brass dark-bronzed, lacquered

4" junction box: covered
 Additional USA 110 V conversion kit: available on request
 110 V bulbs not included



DUOS 36 M – Center pull **Adjustable pendant lamp**

canopy: Ø 7 cm (2.8")
 shade: metal Ø 36 cm (14.2")
 lampholder: E26, max. 100 W

DUOS 36 M – Ms Solid brass polished, lacquered
 DUOS 36 M – Mt Solid brass matt brushed, lacquered
 DUOS 36 M – Ni Solid brass, nickel-plated
 DUOS 36 M – Nm Solid brass nickel-plated, matt brushed
 DUOS 36 M – Cr Solid brass, chrome-plated
 DUOS 36 M – Cu Solid brass copper-plated, lacquered
 DUOS 36 M – Cm Solid brass copper-plated, matt brushed, lacquered
 DUOS 36 M – Br Solid brass bronzed, lacquered
 DUOS 36 M – Bd Solid brass dark-bronzed, lacquered

4" junction box: covered by US canopy Ø 12 cm (4.7") (please indicate with order)
 Additional USA 110 V conversion kit: available on request
 110 V bulbs not included



DUOS 36 S – Side pull **Adjustable pendant lamp**

canopy: Ø 7 cm (2.8")
 shade: metal Ø 36 cm (14.2")
 lampholder: E26, max. 100 W

DUOS 36 S – Ms Solid brass polished, lacquered
 DUOS 36 S – Mt Solid brass matt brushed, lacquered
 DUOS 36 S – Ni Solid brass, nickel-plated
 DUOS 36 S – Nm Solid brass nickel-plated, matt brushed
 DUOS 36 S – Cr Solid brass, chrome-plated
 DUOS 36 S – Cu Solid brass copper-plated, lacquered
 DUOS 36 S – Cm Solid brass copper-plated, matt brushed, lacquered
 DUOS 36 S – Br Solid brass bronzed, lacquered
 DUOS 36 S – Bd Solid brass dark-bronzed, lacquered

4" junction box: covered by US canopy Ø 12 cm (4.7") (please indicate with order)
 Additional USA 110 V conversion kit: available on request
 110 V bulbs not included



DUOS 36 R – Straight pull ceiling mounted

Adjustable pendant lamp

shade: metal Ø 36 cm (14.2")

lampholder: E26, max. 100 W

DUOS 36 R – Ms	Solid brass polished, lacquered
DUOS 36 R – Mt	Solid brass matt brushed, lacquered
DUOS 36 R – Ni	Solid brass, nickel-plated
DUOS 36 R – Nm	Solid brass nickel-plated, matt brushed
DUOS 36 R – Cr	Solid brass, chrome-plated
DUOS 36 R – Cu	Solid brass copper-plated, lacquered
DUOS 36 R – Cm	Solid brass copper-plated, matt brushed, lacquered
DUOS 36 R – Br	Solid brass bronzed, lacquered
DUOS 36 R – Bd	Solid brass dark-bronzed, lacquered

4" junction box: not necessary

Additional USA 110 V conversion kit: available on request

110 V bulbs not included



DUOS 36 D – Double pull Adjustable pendant lamp

canopy: Ø 7 cm (2.8")

shade: metal Ø 36 cm (14.2")

lampholder: 2 x E26, max. 2 x 100 W

DUOS 36 D – Ms	Solid brass polished, lacquered
DUOS 36 D – Mt	Solid brass matt brushed, lacquered
DUOS 36 D – Ni	Solid brass, nickel-plated
DUOS 36 D – Nm	Solid brass nickel-plated, matt brushed
DUOS 36 D – Cr	Solid brass, chrome-plated
DUOS 36 D – Cu	Solid brass copper-plated, lacquered
DUOS 36 D – Cm	Solid brass copper-plated, matt brushed, lacquered
DUOS 36 D – Br	Solid brass bronzed, lacquered
DUOS 36 D – Bd	Solid brass dark-bronzed, lacquered

4" junction box: covered by US canopy Ø 12 cm (4.7") (please indicate with order)

Additional USA 110 V conversion kit: available on request

110 V bulbs not included



Energy class: A++ to E

(Depending on the used bulb.)

Textile cable black. On request: brown, gold, silver.





POSA 36 P – Pendant Pendant lamp

canopy: Ø 12 cm (4.7")
 shade: glass white-opal, Ø 36 cm (14.2")
 lampholder: E26, max. 100 W

POSA 36 P – Ms	Solid brass polished, lacquered
POSA 36 P – Mt	Solid brass matt brushed, lacquered
POSA 36 P – Ni	Solid brass, nickel-plated
POSA 36 P – Nm	Solid brass nickel-plated, matt brushed
POSA 36 P – Cr	Solid brass, chrome-plated
POSA 36 P – Cu	Solid brass copper-plated, lacquered
POSA 36 P – Cm	Solid brass copper-plated, matt brushed, lacquered
POSA 36 P – Br	Solid brass bronzed, lacquered
POSA 36 P – Bd	Solid brass dark-bronzed, lacquered

4" junction box: covered
 Additional USA 110 V conversion kit: available on request
 110 V bulbs not included



POSA 36 M – Center pull Adjustable pendant lamp

canopy: Ø 7 cm (2.8")
 shade: glass white-opal, Ø 36 cm (14.2")
 lampholder: E26, max. 100 W

POSA 36 M – Ms	Solid brass polished, lacquered
POSA 36 M – Mt	Solid brass matt brushed, lacquered
POSA 36 M – Ni	Solid brass, nickel-plated
POSA 36 M – Nm	Solid brass nickel-plated, matt brushed
POSA 36 M – Cr	Solid brass, chrome-plated
POSA 36 M – Cu	Solid brass copper-plated, lacquered
POSA 36 M – Cm	Solid brass copper-plated, matt brushed, lacquered
POSA 36 M – Br	Solid brass bronzed, lacquered
POSA 36 M – Bd	Solid brass dark-bronzed, lacquered

4" junction box: covered by US canopy Ø 12 cm (4.7") (please indicate with order)
 Additional USA 110 V conversion kit: available on request
 110 V bulbs not included



POSA 36 S – Side pull Adjustable pendant lamp

canopy: Ø 7 cm (2.8")
 shade: glass white-opal, Ø 36 cm (14.2")
 lampholder: E26, max. 100 W

POSA 36 S – Ms	Solid brass polished, lacquered
POSA 36 S – Mt	Solid brass matt brushed, lacquered
POSA 36 S – Ni	Solid brass, nickel-plated
POSA 36 S – Nm	Solid brass nickel-plated, matt brushed
POSA 36 S – Cr	Solid brass, chrome-plated
POSA 36 S – Cu	Solid brass copper-plated, lacquered
POSA 36 S – Cm	Solid brass copper-plated, matt brushed, lacquered
POSA 36 S – Br	Solid brass bronzed, lacquered
POSA 36 S – Bd	Solid brass dark-bronzed, lacquered

4" junction box: covered by US canopy Ø 12 cm (4.7") (please indicate with order)
 Additional USA 110 V conversion kit: available on request
 110 V bulbs not included



POSA 36 R – Straight pull ceiling mounted

Adjustable pendant lamp

shade: glass white-opal, Ø 36 cm (14.2")

lampholder: E26, max. 100 W

POSA 36 R – Ms	Solid brass polished, lacquered
POSA 36 R – Mt	Solid brass matt brushed, lacquered
POSA 36 R – N	Solid brass, nickel-plated
POSA 36 R – Nm	Solid brass nickel-plated, matt brushed
POSA 36 R – Cr	Solid brass, chrome-plated
POSA 36 R – Cu	Solid brass copper-plated, lacquered
POSA 36 R – Cm	Solid brass copper-plated, matt brushed, lacquered
POSA 36 R – Br	Solid brass bronzed, lacquered
POSA 36 R – Bd	Solid brass dark-bronzed, lacquered

4" junction box: not necessary

Additional USA 110 V conversion kit: available on request

110 V bulbs not included



POSA 36 D – Double pull Adjustable pendant lamp

canopy: Ø 7 cm (2.8")

shade: glass white-opal, Ø 36 cm (14.2")

lampholder: 2 x E26, max. 2 x 100 W

POSA 36 D – Ms	Solid brass polished, lacquered
POSA 36 D – Mt	Solid brass matt brushed, lacquered
POSA 36 D – Ni	Solid brass, nickel-plated
POSA 36 D – Nm	Solid brass nickel-plated, matt brushed
POSA 36 D – Cr	Solid brass, chrome-plated
POSA 36 D – Cu	Solid brass copper-plated, lacquered
POSA 36 D – Cm	Solid brass copper-plated, matt brushed, lacquered
POSA 36 D – Br	Solid brass bronzed, lacquered
POSA 36 D – Bd	Solid brass dark-bronzed, lacquered

4" junction box: covered by US canopy Ø 12 cm (4.7") (please indicate with order)

Additional USA 110 V conversion kit: available on request

110 V bulbs not included



Energy class: A++ to E

(Depending on the used bulb.)

Textile cable black. On request: brown, gold, silver.






ONOS 55 P – Pendant **Pendant lamp**

canopy: Ø 12 cm (4.7")
 shade: metal Ø 55 cm (21.7"), metal light diffuser
 lampholder: E26, max. 100 W

ONOS 55 P – Ms	Solid brass polished, lacquered
ONOS 55 P – Mt	Solid brass matt brushed, lacquered
ONOS 55 P – Ni	Solid brass, nickel-plated
ONOS 55 P – Nm	Solid brass nickel-plated, matt brushed
ONOS 55 P – Cr	Solid brass, chrome-plated
ONOS 55 P – Cu	Solid brass copper-plated, lacquered
ONOS 55 P – Cm	Solid brass copper-plated, matt brushed, lacquered
ONOS 55 P – Br	Solid brass bronzed, lacquered
ONOS 55 P – Bd	Solid brass dark-bronzed, lacquered

4" junction box: covered
 Additional USA 110 V conversion kit: available on request
 110 V bulbs not included




ONOS 55 M – Center pull **Adjustable pendant lamp**

canopy: Ø 7 cm (2.8")
 shade: metal Ø 55 cm (21.7"), metal light diffuser
 lampholder: E26, max. 100 W

ONOS 55 M – Ms	Solid brass polished, lacquered
ONOS 55 M – Mt	Solid brass matt brushed, lacquered
ONOS 55 M – Ni	Solid brass, nickel-plated
ONOS 55 M – Nm	Solid brass nickel-plated, matt brushed
ONOS 55 M – Cr	Solid brass, chrome-plated
ONOS 55 M – Cu	Solid brass copper-plated, lacquered
ONOS 55 M – Cm	Solid brass copper-plated, matt brushed, lacquered
ONOS 55 M – Br	Solid brass bronzed, lacquered
ONOS 55 M – Bd	Solid brass dark-bronzed, lacquered

4" junction box: covered by US canopy Ø 12 cm (4.7") (please indicate with order)
 Additional USA 110 V conversion kit: available on request
 110 V bulbs not included



ONOS 55 S – Side pull **Adjustable pendant lamp**

canopy: Ø 7 cm (2.8")
 shade: metal Ø 55 cm (21.7"), metal light diffuser
 lampholder: E26, max. 100 W

ONOS 55 S – Ms	Solid brass polished, lacquered
ONOS 55 S – Mt	Solid brass matt brushed, lacquered
ONOS 55 S – Ni	Solid brass, nickel-plated
ONOS 55 S – Nm	Solid brass nickel-plated, matt brushed
ONOS 55 S – Cr	Solid brass, chrome-plated
ONOS 55 S – Cu	Solid brass copper-plated, lacquered
ONOS 55 S – Cm	Solid brass copper-plated, matt brushed, lacquered
ONOS 55 S – Br	Solid brass bronzed, lacquered
ONOS 55 S – Bd	Solid brass dark-bronzed, lacquered

4" junction box: covered by US canopy Ø 12 cm (4.7") (please indicate with order)
 Additional USA 110 V conversion kit: available on request
 110 V bulbs not included



ONOS 55 R – Straight pull ceiling mounted

Adjustable pendant lamp

shade: metal Ø 55 cm (21.7"), metal light diffuser
lampholder: E26, max. 100 W

ONOS 55 R – Ms	Solid brass polished, lacquered
ONOS 55 R – Mt	Solid brass matt brushed, lacquered
ONOS 55 R – Ni	Solid brass, nickel-plated
ONOS 55 R – Nm	Solid brass nickel-plated, matt brushed
ONOS 55 R – Cr	Solid brass, chrome-plated
ONOS 55 R – Cu	Solid brass copper-plated, lacquered
ONOS 55 R – Cm	Solid brass copper-plated, matt brushed, lacquered
ONOS 55 R – Br	Solid brass bronzed, lacquered
ONOS 55 R – Bd	Solid brass dark-bronzed, lacquered

4" junction box: not necessary

Additional USA 110 V conversion kit: available on request

110 V bulbs not included



ONOS 55 D – Double pull Adjustable pendant lamp

canopy: Ø 7 cm (2.8")
shade: metal Ø 55 cm (21.7"), metal light diffuser
lampholder: 2 x E26, max. 2 x 100 W

ONOS 55 D – Ms	Solid brass polished, lacquered
ONOS 55 D – Mt	Solid brass matt brushed, lacquered
ONOS 55 D – Ni	Solid brass, nickel-plated
ONOS 55 D – Nm	Solid brass nickel-plated, matt brushed
ONOS 55 D – Cr	Solid brass, chrome-plated
ONOS 55 D – Cu	Solid brass copper-plated, lacquered
ONOS 55 D – Cm	Solid brass copper-plated, matt brushed, lacquered
ONOS 55 D – Br	Solid brass bronzed, lacquered
ONOS 55 D – Bd	Solid brass dark-bronzed, lacquered

4" junction box: covered by US canopy Ø 12 cm (4.7") (please indicate with order)

Additional USA 110 V conversion kit: available on request

110 V bulbs not included



Energy class: A++ to E

(Depending on the used bulb.)

Textile cable black. On request: brown, gold, silver.





ONOS 40 P – Pendant **Pendant lamp**

canopy: Ø 12 cm (4.7")
 shade: metal Ø 40 cm (15.7"), metal light diffuser
 lampholder: E26, max. 100 W

ONOS 40 P – Ms	Solid brass polished, lacquered
ONOS 40 P – Mt	Solid brass matt brushed, lacquered
ONOS 40 P – Ni	Solid brass, nickel-plated
ONOS 40 P – Nm	Solid brass nickel-plated, matt brushed
ONOS 40 P – Cr	Solid brass, chrome-plated
ONOS 40 P – Cu	Solid brass copper-plated, lacquered
ONOS 40 P – Cm	Solid brass copper-plated, matt brushed, lacquered
ONOS 40 P – Br	Solid brass bronzed, lacquered
ONOS 40 P – Bd	Solid brass dark-bronzed, lacquered

4" junction box: covered
 Additional USA 110 V conversion kit: available on request
 110 V bulbs not included



ONOS 40 M – Center pull **Adjustable pendant lamp**

canopy: Ø 7 cm (2.8")
 shade: metal Ø 40 cm (15.7"), metal light diffuser
 lampholder: E26, max. 100 W

ONOS 40 M – Ms	Solid brass polished, lacquered
ONOS 40 M – Mt	Solid brass matt brushed, lacquered
ONOS 40 M – Ni	Solid brass, nickel-plated
ONOS 40 M – Nm	Solid brass nickel-plated, matt brushed
ONOS 40 M – Cr	Solid brass, chrome-plated
ONOS 40 M – Cu	Solid brass copper-plated, lacquered
ONOS 40 M – Cm	Solid brass copper-plated, matt brushed, lacquered
ONOS 40 M – Br	Solid brass bronzed, lacquered
ONOS 40 M – Bd	Solid brass dark-bronzed, lacquered

4" junction box: covered by US canopy Ø 12 cm (4.7") (please indicate with order)
 Additional USA 110 V conversion kit: available on request
 110 V bulbs not included



ONOS 40 S – Side pull **Adjustable pendant lamp**

canopy: Ø 7 cm (2.8")
 shade: metal Ø 40 cm (15.7"), metal light diffuser
 lampholder: E26, max. 100 W

ONOS 40 S – Ms	Solid brass polished, lacquered
ONOS 40 S – Mt	Solid brass matt brushed, lacquered
ONOS 40 S – Ni	Solid brass, nickel-plated
ONOS 40 S – Nm	Solid brass nickel-plated, matt brushed
ONOS 40 S – Cr	Solid brass, chrome-plated
ONOS 40 S – Cu	Solid brass copper-plated, lacquered
ONOS 40 S – Cm	Solid brass copper-plated, matt brushed, lacquered
ONOS 40 S – Br	Solid brass bronzed, lacquered
ONOS 40 S – Bd	Solid brass dark-bronzed, lacquered

4" junction box: covered by US canopy Ø 12 cm (4.7") (please indicate with order)
 Additional USA 110 V conversion kit: available on request
 110 V bulbs not included



ONOS 40 R – Straight pull ceiling mounted

Adjustable pendant lamp

shade: metal Ø 40 cm (15.7"), metal light diffuser
lampholder: E26, max. 100 W

ONOS 40 R – Ms	Solid brass polished, lacquered
ONOS 40 R – Mt	Solid brass matt brushed, lacquered
ONOS 40 R – Ni	Solid brass, nickel-plated
ONOS 40 R – Nm	Solid brass nickel-plated, matt brushed
ONOS 40 R – Cr	Solid brass, chrome-plated
ONOS 40 R – Cu	Solid brass copper-plated, lacquered
ONOS 40 R – Cm	Solid brass copper-plated, matt brushed, lacquered
ONOS 40 R – Br	Solid brass bronzed, lacquered
ONOS 40 R – Bd	Solid brass dark-bronzed, lacquered

4" junction box: not necessary

Additional USA 110 V conversion kit: available on request

110 V bulbs not included



ONOS 40 D – Double pull Adjustable pendant lamp


canopy: Ø 7 cm (2.8")
shade: metal Ø 40 cm (15.7"), metal light diffuser
lampholder: 2 x E26, max. 2 x 100 W

ONOS 40 D – Ms	Solid brass polished, lacquered
ONOS 40 D – Mt	Solid brass matt brushed, lacquered
ONOS 40 D – Ni	Solid brass, nickel-plated
ONOS 40 D – Nm	Solid brass nickel-plated, matt brushed
ONOS 40 D – Cr	Solid brass, chrome-plated
ONOS 40 D – Cu	Solid brass copper-plated, lacquered
ONOS 40 D – Cm	Solid brass copper-plated, matt brushed, lacquered
ONOS 40 D – Br	Solid brass bronzed, lacquered
ONOS 40 D – Bd	Solid brass dark-bronzed, lacquered

4" junction box: covered by US canopy Ø 12 cm (4.7") (please indicate with order)

Additional USA 110 V conversion kit: available on request

110 V bulbs not included

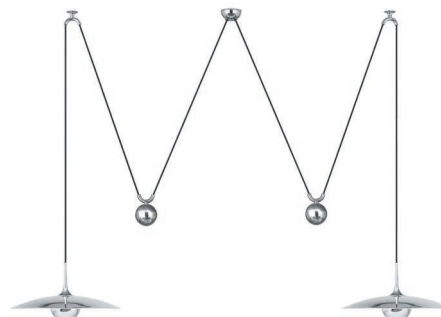

Energy class: A++ to E

(Depending on the used bulb.)

Textile cable black. On request: brown, gold, silver.





P80-1

pendant lamp, height adjustable

height: from 65 cm (25.6") – 135 cm (53.15") (standard)*
 canopy: Ø 6 cm (2.36")
 shade: Ø 8 cm (3.15"), 16,5 cm (6.5") high
 bulb: 1 x LED (20 Watt) incl., 2000 Lumen
 color temperature: Dim-to-Warm from 3100° – 1850 °K
 color rendering: > 90 Ra
 dimmer: possible via house installation**

P80-1 – Ms	Solid brass polished, lacquered
P80-1 – Mt	Solid brass matt brushed, lacquered
P80-1 – Ni	Solid brass, nickel-plated
P80-1 – Nm	Solid brass nickel-plated, matt brushed
P80-1 – Cr	Solid brass, chrome-plated
P80-1 – Cu	Solid brass copper-plated, lacquered
P80-1 – Cm	Solid brass copper-plated, matt brushed, lacquered
P80-1 – Br	Solid brass bronzed, lacquered
P80-1 – Bd	Solid brass dark-bronzed, lacquered




P80-3

triple pendant lamp, individually height-adjustable

height: 3 x from 65 cm (25.6") – 135 cm (53.15") (standard)*
 canopy: 132 cm (51.97") long, 8 cm (3.15") wide, 4 cm (1.57") high
 shade: 3 x Ø 8 cm (3.15"), 16,5 cm (6.5") high
 bulb: 3 x LED (3 x 20 Watt) incl., 6000 Lumen
 color temperature: Dim-to-Warm from 3100° – 1850 °K
 color rendering: > 90 Ra
 dimmer: possible via house installation**

P80-3 – Ms	Solid brass polished, lacquered
P80-3 – Mt	Solid brass matt brushed, lacquered
P80-3 – Ni	Solid brass, nickel-plated
P80-3 – Nm	Solid brass nickel-plated, matt brushed
P80-3 – Cr	Solid brass, chrome-plated
P80-3 – Cu	Solid brass copper-plated, lacquered
P80-3 – Cm	Solid brass copper-plated, matt brushed, lacquered
P80-3 – Br	Solid brass bronzed, lacquered
P80-3 – Bd	Solid brass dark-bronzed, lacquered

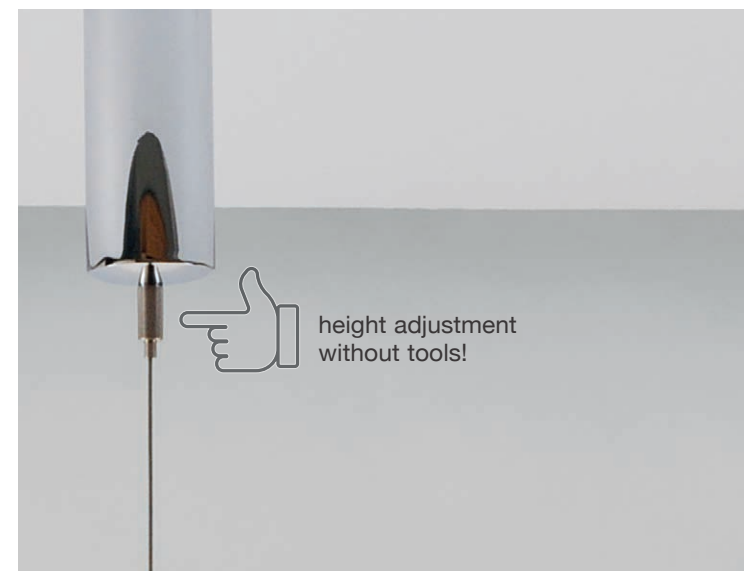

Energy class: A++ to A

4" junction box: covered

Additional USA 110 V conversion kit: available on request

* other suspension heights on request

** z.B. JUNG 1224 LED UDE





PEN 100

pendant lamp, height adjustable
both light elements can be rotated (360°)

length: 100 cm (39.4")
 canopy: 15 x 15 x 5 cm (5.9" x 5.9" x 2.0")
 height: 80 to 140 cm (31.5" to 55.1") adjustable (standard)*
 bulb: 2 x LED 150 (approx. 12 watts in total) incl.
 exchangeable
 approx. 1200 Lumen
 color temperature: warmwhite 2700 K
 color rendering: > 90 Ra
 dimmer: possible via house installation or Casambi**

PEN 100 – Ms	Solid brass polished, lacquered
PEN 100 – Mt	Solid brass matt brushed, lacquered
PEN 100 – Ni	Solid brass, nickel-plated
PEN 100 – Nm	Solid brass nickel-plated, matt brushed
PEN 100 – Cr	Solid brass, chrome-plated
PEN 100 – Cu	Solid brass copper-plated, lacquered
PEN 100 – Cm	Solid brass copper-plated, matt brushed, lacquered
PEN 100 – Br	Solid brass bronzed, lacquered
PEN 100 – Bd	Solid brass dark-bronzed, lacquered

Energy class: A++ to A

4" junction box: covered

Additional USA 110 V conversion kit: available on request

* The following suspensions on request (without surcharge):

Overall height 105 – 200 cm (41.3" – 78.7")


Overall height 130 – 250 cm (51.2" – 98.4")

Other pendulum lengths possible on request

** We recommend (without obligation)

the following dimmer brands:

- Jung 1731DD
- Feller 40300.RC
- Ardit 027505
- Casambi Dimmer 800598 / 800680
- Kopp 8033

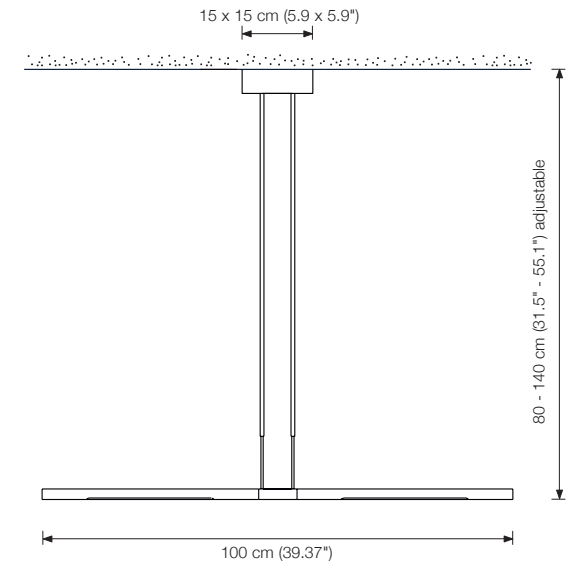

PEN 121

pendant lamp, height adjustable

outer light elements can be rotated (360°)

length: 121 cm (47.6")
 canopy: 46,5 x 5 x 5 cm (18.3" x 2.0" x 2.0")
 height: 80 to 140 cm (31.5" to 55.1") adjustable (standard)*
 bulb: 3 x LED 150 (approx. 24 watts in total) incl.
 exchangeable
 approx. 2200 Lumen
 color temperature: warmwhite 2700 K
 color rendering: > 90 Ra
 dimmer: possible via house installation or Casambi**

PEN 121 – Ms Solid brass polished, lacquered
 PEN 121 – Mt Solid brass matt brushed, lacquered
 PEN 121 – Ni Solid brass, nickel-plated
 PEN 121 – Nm Solid brass nickel-plated, matt brushed
 PEN 121 – Cr Solid brass, chrome-plated
 PEN 121 – Cu Solid brass copper-plated, lacquered
 PEN 121 – Cm Solid brass copper-plated, matt brushed, lacquered
 PEN 121 – Br Solid brass bronzed, lacquered
 PEN 121 – Bd Solid brass dark-bronzed, lacquered

Energy class: A++ to A

4" junction box: not covered

Additional USA 110 V conversion kit: available on request
 including a rectangular backplate of
 51 x 12 cm (20.1" x 4.7")

* The following suspensions on request (without surcharge):

Overall height 105 – 200 cm (41.3" – 78.7")



Overall height 130 – 250 cm (51.2" – 98.4")

Other pendulum lengths possible on request

** We recommend (without obligation)

the following dimmer brands:

- Jung 1731DD
- Feller 40300.RC
- Arditì 027505
- Casambi Dimmer 800598 / 800680
- Kopp 8033

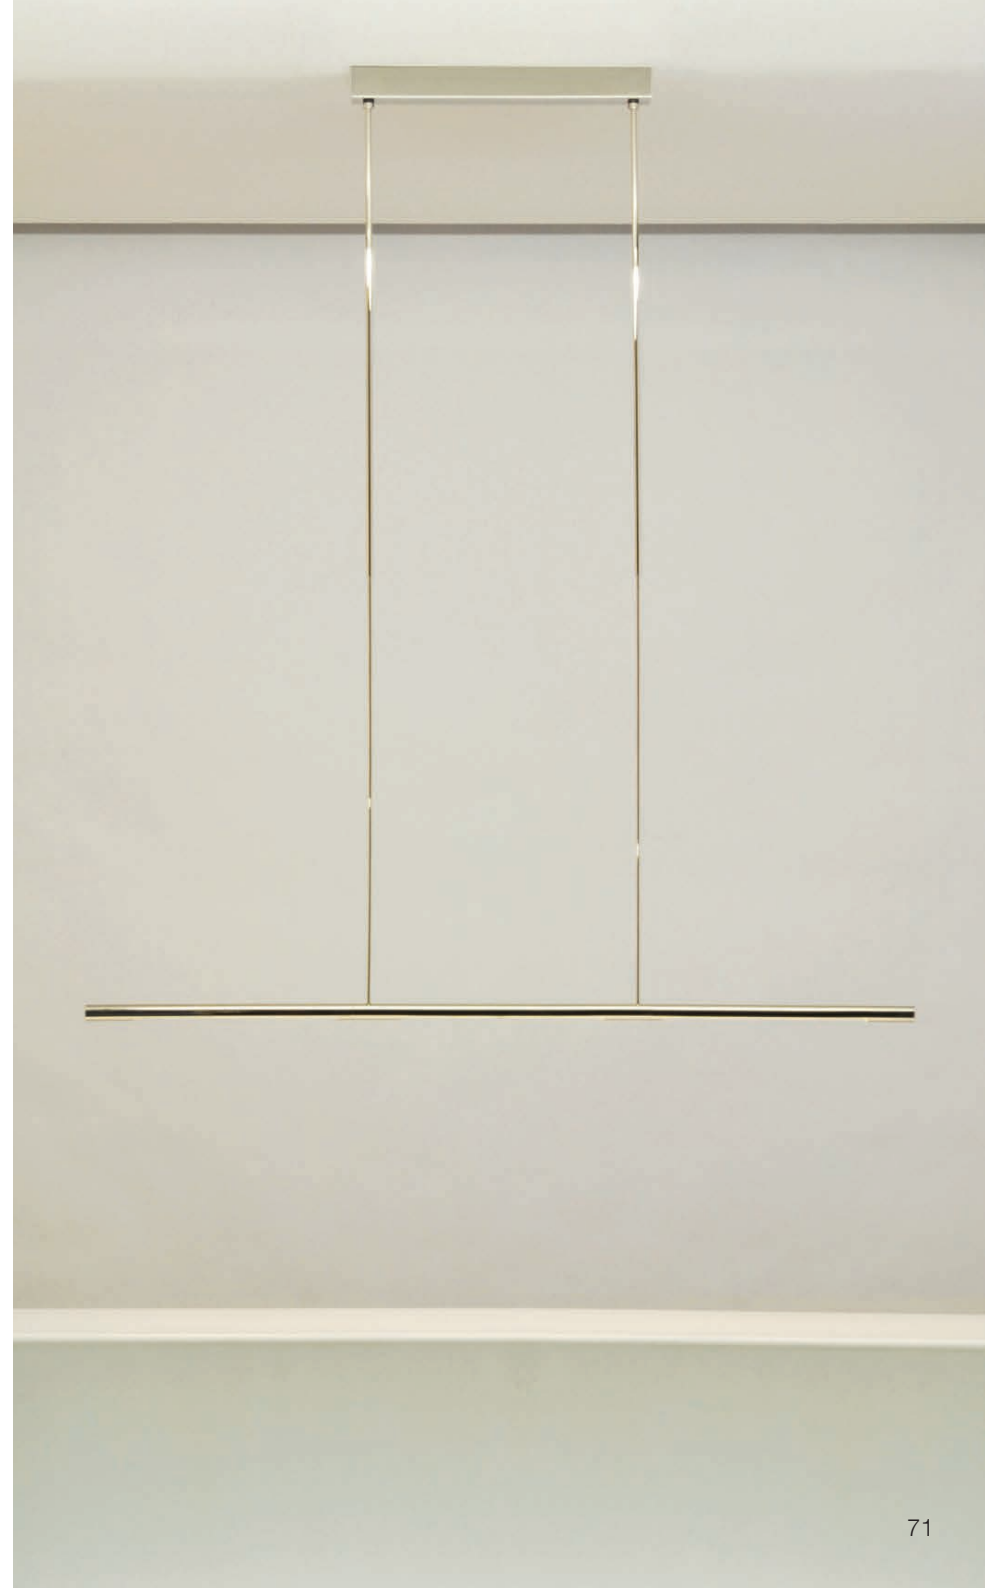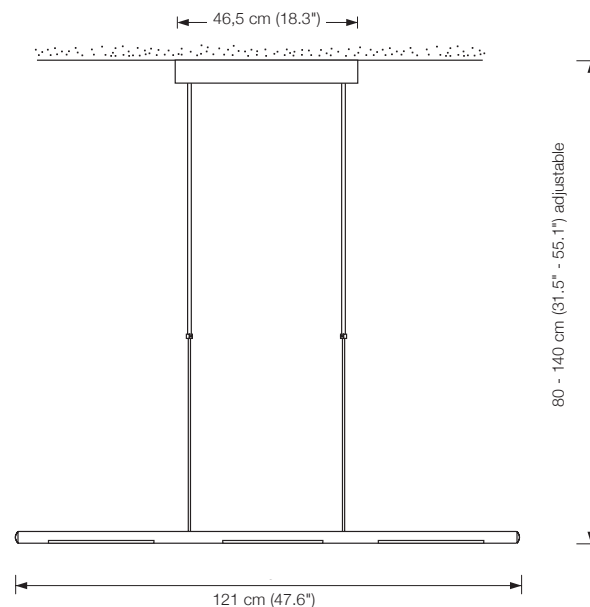



PEN 142

pendant lamp, height adjustable
all light elements can be rotated (360°)

length: 142 cm (55.9")
canopy: 53 x 5 x 5 cm (20.9" x 2.0" x 2.0")
height: 80 to 140 cm (31.5" to 55.1") adjustable (standard)*
bulb: 3 x LED 150 (approx. 24 watts in total) incl.
exchangeable
approx. 2200 Lumen
color temperature: warmwhite 2700 K
color rendering: > 90 Ra
dimmer: possible via house installation or Casambi**

PEN 142 – Ms	Solid brass polished, lacquered
PEN 142 – Mt	Solid brass matt brushed, lacquered
PEN 142 – Ni	Solid brass, nickel-plated
PEN 142 – Nm	Solid brass nickel-plated, matt brushed
PEN 142 – Cr	Solid brass, chrome-plated
PEN 142 – Cu	Solid brass copper-plated, lacquered
PEN 142 – Cm	Solid brass copper-plated, matt brushed, lacquered
PEN 142 – Br	Solid brass bronzed, lacquered
PEN 142 – Bd	Solid brass dark-bronzed, lacquered

Energy class: A++ to A

4" junction box: not covered


Additional USA 110 V conversion kit: available on request
including a rectangular backplate of
57,5 x 12 cm (22.6" x 4.7")

* The following suspensions on request (without surcharge):

Overall height 105 – 200 cm (41.3" – 78.7")
Overall height 130 – 250 cm (51.2" – 98.4")
Other pendulum lengths possible on request

** We recommend (without obligation)

the following dimmer brands:
– Jung 1731DD
– Feller 40300.RC
– Arditi 027505
– Casambi Dimmer 800598 / 800680
– Kopp 8033

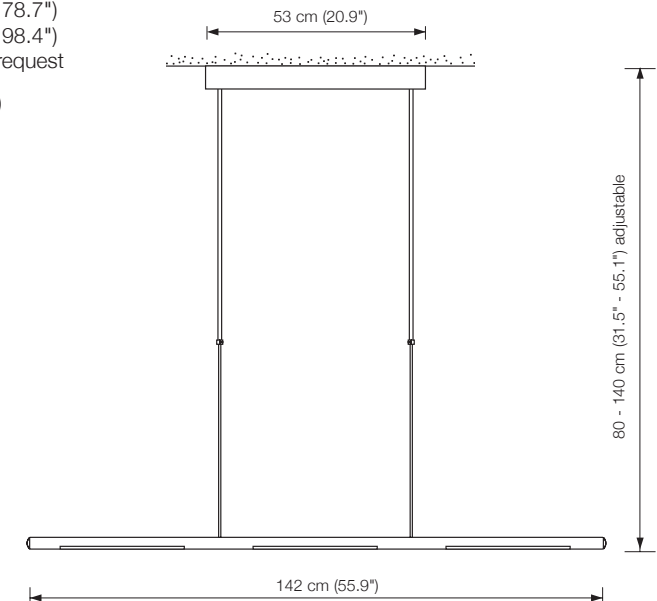





OYO

spotlight

swivelling to all sides
for reflector-lights

Ø wall installation: approx. 12 cm (4.7")

Ø shade: approx. 13 cm (5.1")

lampholder: G53

bulb: 1 x GU53 LED Spot (8,5 W $\hat{=}$ 50 W), 24 ° incl.*
dimmable
exchangeable
approx. 450 Lumen

color temperature: warmwhite 2700 K

color rendering: > 90 Ra

OYO – Ms Solid brass polished, lacquered

OYO – Mt Solid brass matt brushed, lacquered

OYO – Ni Solid brass, nickel-plated

OYO – Nm Solid brass nickel-plated, matt brushed

OYO – Cr Solid brass, chrome-plated

OYO – Cu Solid brass copper-plated, lacquered

OYO – Cm Solid brass copper-plated, matt brushed, lacquered

OYO – Br Solid brass bronzed, lacquered

OYO – Bd Solid brass dark-bronzed, lacquered


* other bulbs on request.

Energy class: A

This model will be sold with a class A bulb.

4" junction box: covered

Additional USA 110 V conversion kit: available on request

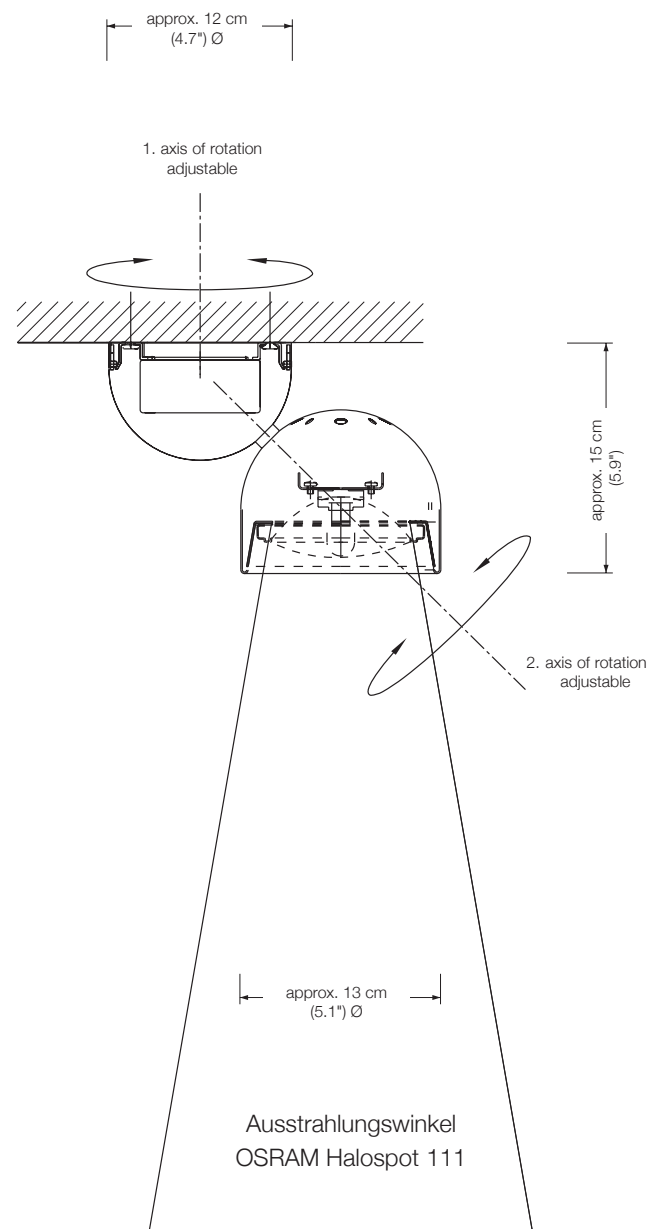



VS Manufaktur
Wahlwiesenstr. 1
71711 Steinheim
Germany

Tel +49 7144 / 889 110 5
Fax +49 7144 / 889 110 7

www.vs-manufaktur.de
info@vs-manufaktur.de

All rights reserved.
Specifications and design subject to change without notice.